SHEET OF

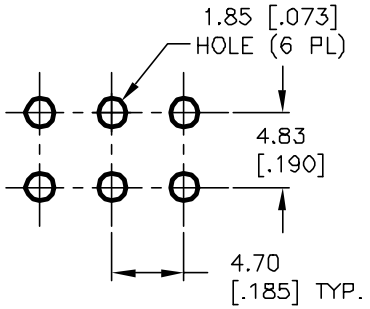

RECOMMEND P.C.B. LAYOUT



CIRCUIT: DPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) @20V ACor DC max.
▲ 5. FIXED TERM. & MOVING CONTACT:
   Copper Alloy w/Gold plate over
   Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
   cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
▲ 10. SUPPLIED HARDWARE- HEX NUT (2) LOCK RING,
   AND LOCK WASHER.

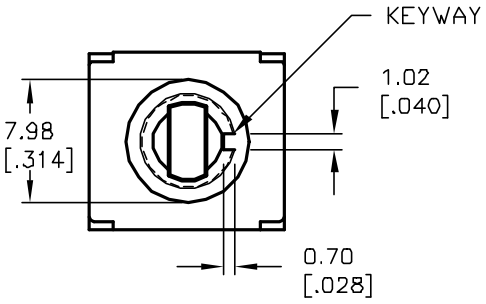

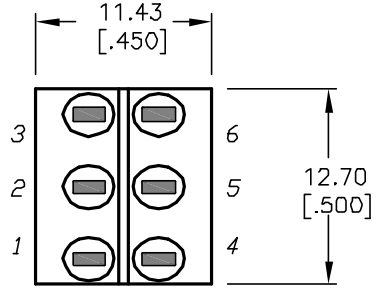

BOTTOM VIEW

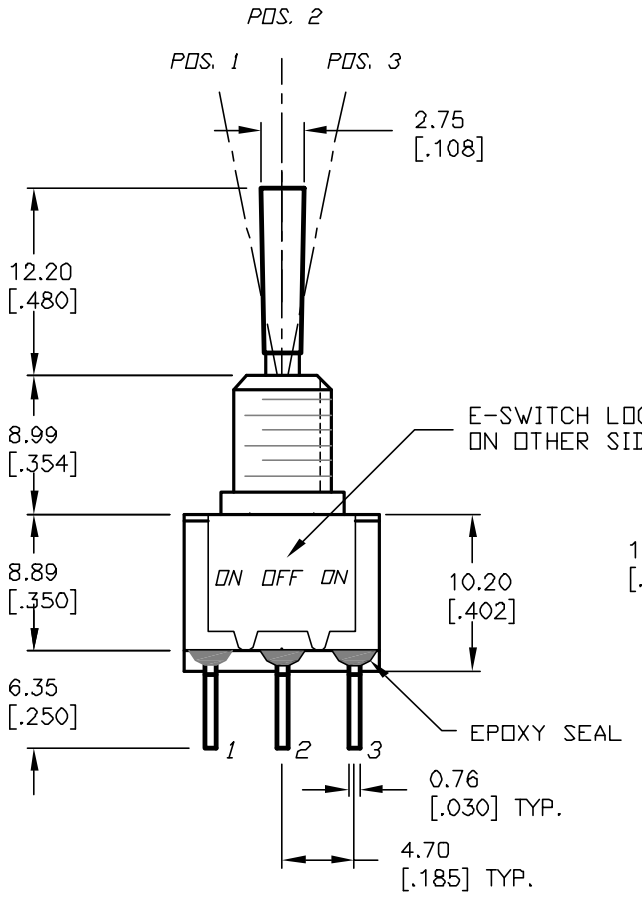

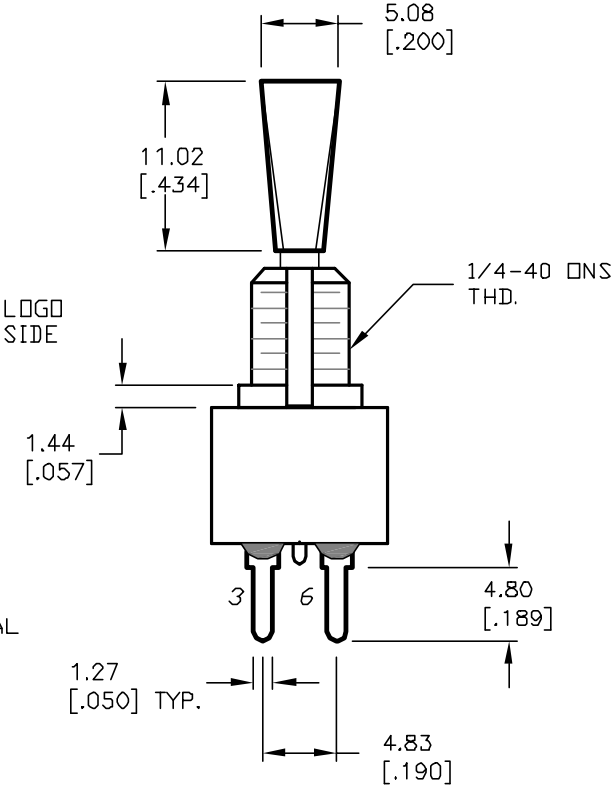

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12253	RELEASED FOR PRODUCTION	6/19/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100 DP-3 T6 B11 M2 R E

SCALE	DATE	DR	DWG	REV
2:1	6/19/02	CJB	T123051	A