



PC MOUNTING

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
ON	OFF	ON	
2-1, 5-4	OPEN	2-3, 5-6	





NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RATING: 5A @120VAC OR 28VDC, 2A @250VAC
- CONTACT RESISTANCE: 10m OHM MAX.
- ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

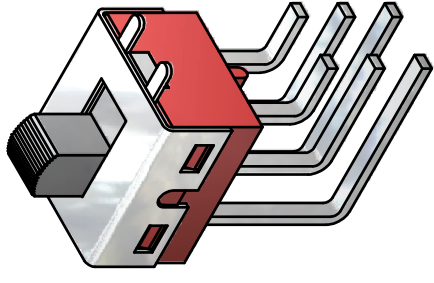

ISOMETRIC

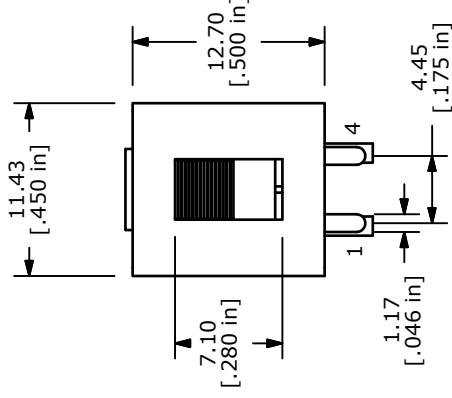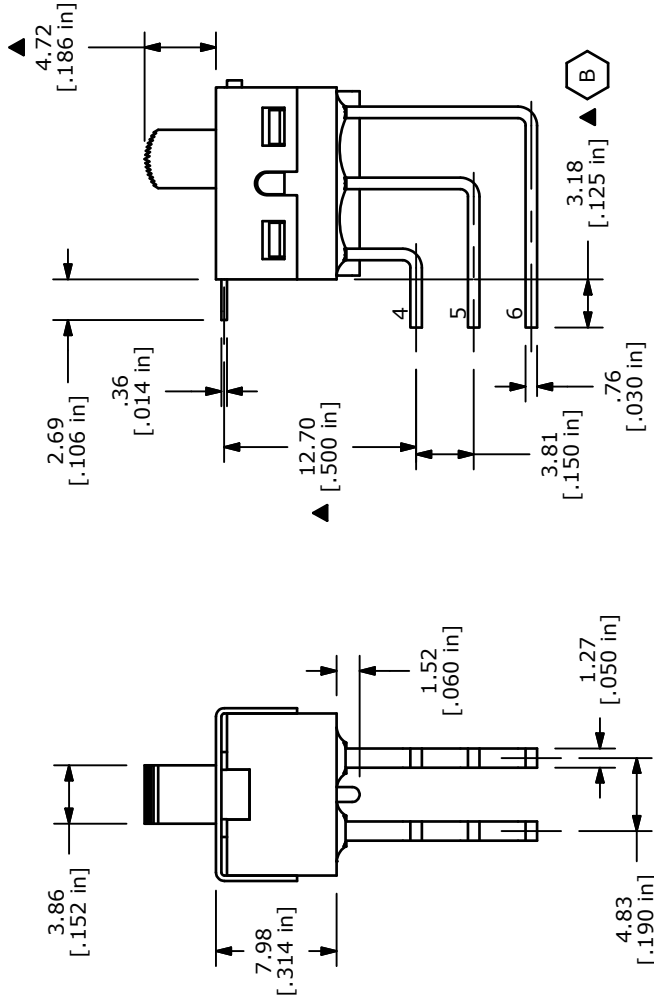

C	19565	DRAWING UPDATE	1/6/11	BGL
B	14850	CORRECTED TERM. LENGTH	4/13/05	JEB
A	14818	RELEASED FOR PRODUCTION	4/7/05	AR
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®

TITLE 500SDP3S1M7QEA

SCALE	2:1	DATE	4/7/2005	DR	CJB	DWG	T523002	REV	C
-------	-----	------	----------	----	-----	-----	---------	-----	---