

03 0369 V109


Circular connectors with threaded joint M16 acc. to IEC 61076-2-106, IP40/IP67/IP68

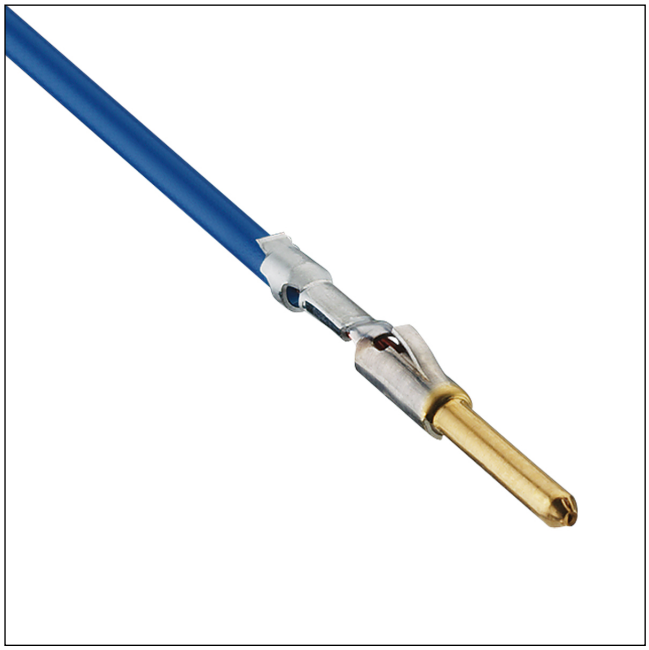

Crimp contact, contact pin gold-plated

03 0369 V109

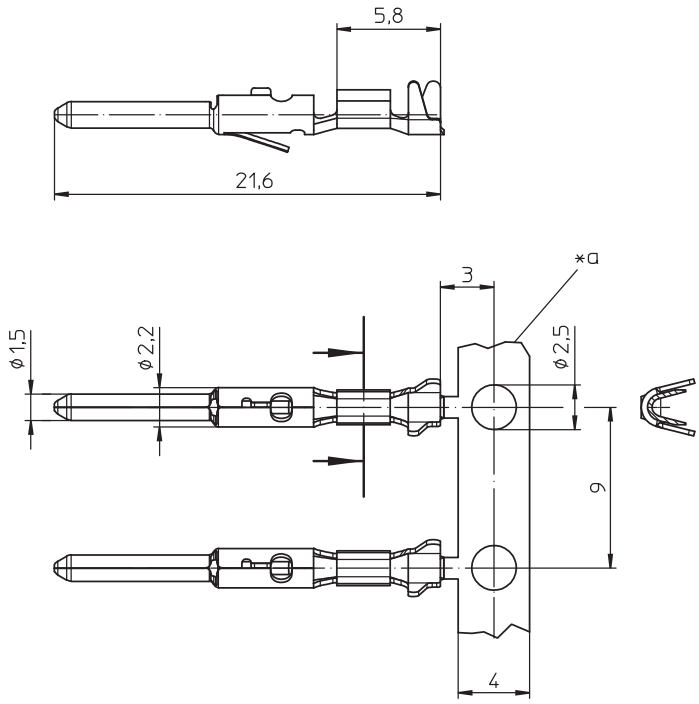

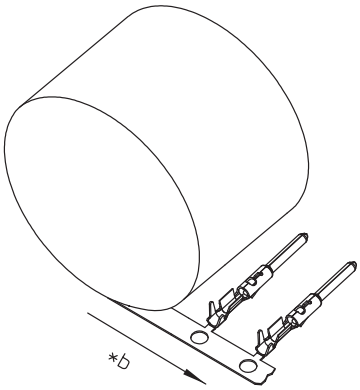

*a supporting strip
*b unreeling direction

Environmental conditions

Temperature range	-40 °C/+85 °C

Materials

Contact pin	CuSn, gold-plated

Mechanical data

Mating cycles	≥ 1000

Connectable conductors for crimp area

Section	0,25–0,75 mm² (AWG 23–18)
Insulation diameter	≤ 1,8 mm

Electrical data (at T_{amb} 20 °C)

Rated current	5 A (T_{amb} 40 °C)
Rated voltage	250/320 V AC
Further data	see suitable connector housing

Associated products

Counterparts
- 036000
- 0364 V109

Accessories
- 0365
- 036500

Harnessing equipment
- CA03
- CAS03
- CAW03
- CM03-01-0369
- CM03-03-0369
- CMW03-01-0369
- CMW03-03-0369
- CZB03-0369
- CZK03

03 0369 V109

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0369 V109	1	10000	10000
0369 V109VP18	1	350	1750

Packaging:
on reel