



SCHNITT A-A
Sectional view A-A

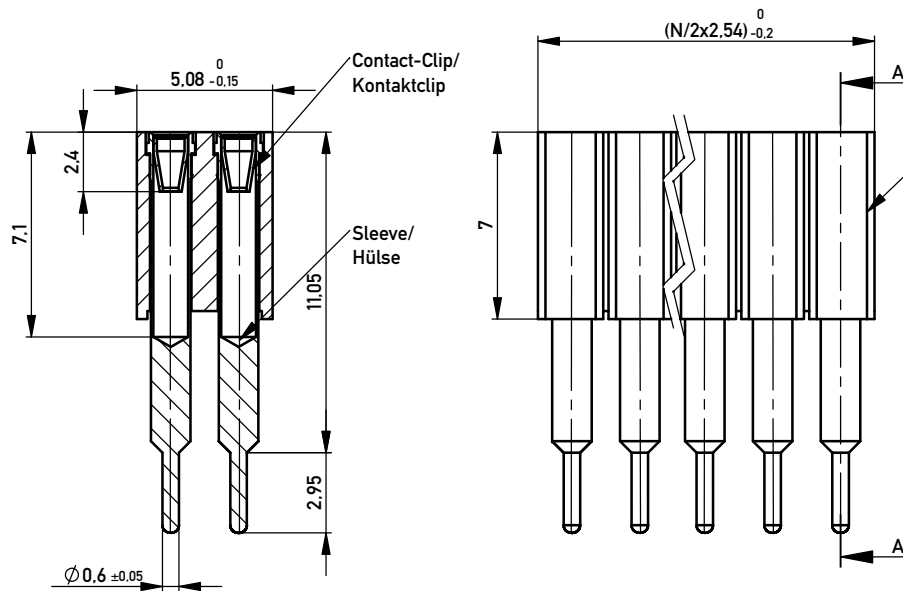

Leiterplatten Layout / PCB Layout

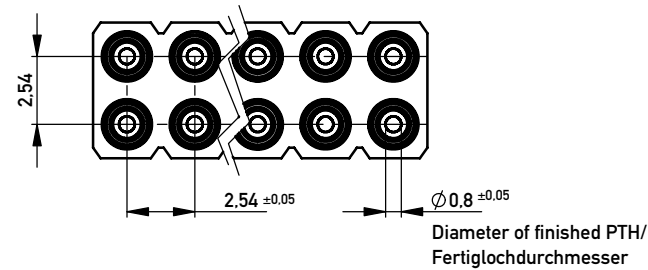

Tech. Data:

Isolierkörper / Insulation Body: PCT-GF30-FR
Farbe / Colour: schwarz / black

Brennbarkeit / Flammability: UL 94V-0

zweiteiliger Kontakt / Two part contact:

Hülse / Sleeve: CuZn36Pb3
Hülse Galvanik / Sleeve Plating: Sn


Kontakt Clip / Contact-Clip (6 finger): CuBe
Kontakt Clip Galvanik / Contact-Clip Plating: 0,75µm Au

Passender Kontaktstift / Mating pin dimension:

Runder Stift / round pin: Ø 0,70 - 0,90 mm
Quadratischer Stift / square pin: 0,635 x 0,635 mm

Steckkraft / Insertion force: 1,2 N typ.
Ziehkraft / Withdrawal force: 0,6 N typ.
(gemessen mit polierter Stahllehre Ø 0,76 mm)
(measured with polished steel gauge Ø 0,76 mm)

Lebensdauer / Mechanical life: min. 500 Zyklen / cycles
Strombelastbarkeit / Rated current: 3 A
Kontaktwiderstand / Contact resistance: max. 10 mΩ
Durchschlagfestigkeit / Dielectric strength: min. 1000 V_{RMS}



Example
10 Pin version

100601430001	30	Schüttgut Bulk
Ident-Nr. Part-No.	Polzahl No. of contacts	Verpackung Packing

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Information:		Tolerances		 All Dimensions in mm		Scale		5:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation					
						Buchsenleiste (Löt) <i>Socket strip (solder)</i>					
						www.ERNI.com		100601430001			K
				Index		Date		Class			BULHW