




PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

P4KE6.8 THRU P4KE440CA(GPP)
P4KE6.8J THRU P4KE440CAJ(OPEN JUNCTION)

Breakdown Voltage 6.8 to 400 Volts
Peak Pulse Power 400 Watts

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated or silastic guard junction (open junction)
- 400W peak pulse power capability with a 10/1000 μ s Waveform, repetition rate (duty cycle): 0.0% 1
- Excellent clamping capability
- Low incremental surge resistance
- Fast response time: typically less than 1.0ps from 0 Volts to $V_{(BR)}$ for unidirectional and 5.0ns for bidirectional types
- Devices with $V_{(BR)} \geq 10V$, I_D are typically I_D less than 1.0 μ A
- High temperature soldering guaranteed:
 265°C/10 seconds, 0.375" (9.5mm) lead length, 51bs.(2.3kg) tension

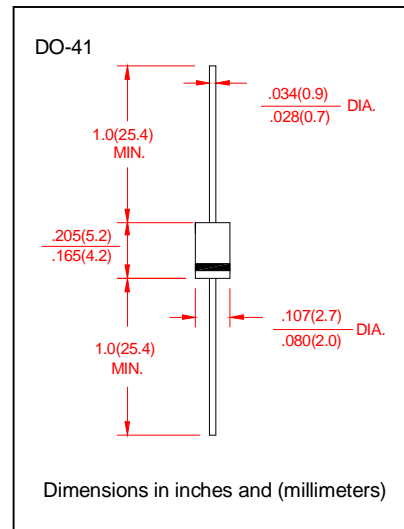

MECHANICAL DATA

- Cass: JEDEC DO-204AL, molded plastic body over passivated junction
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color bands denotes positive end (cathode) except for bidirectional types
- Mounting position: any
- Weight: 0.012 ounces, 0.3 gram

DEVICES FOR BIDIRECTIONAL APPLICATIONS

- For bidirectional use C or CA suffix for types P4KE7.5 THRU TYPES P4K440 (e.g. P4KE7.5CA, P4KE440CA).Electrical Characteristics apply in both directions.
- Suffix A denotes $\pm 5\%$ tolerance device, No suffix A denotes $\pm 10\%$ tolerance device

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified

Ratings	Symbols	Value	Unit
Peak Pulse power dissipation with a 10/1000 μ s waveform(NOTE1,FIG.1)	PPPM	Minimum 400	Watts
Peak Pulse current with a 10/1000 μ s waveform (NOTE1,FIG.3)	IPPM	See Table 1	Watt
Steady Stage Power Dissipation at $T_T=75^\circ C$ Lead lengths 0.375"(9.5)(Note2)	$P_{M(AV)}$	1.0	Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) (Note3)	I_{FSM}	40.0	Amps
Maximum instantaneous forward voltage at 25A for unidirectional only (NOTE 3)	V_F	3.5/6.5	Volts
Operating Junction and Storage Temperature Range	T_J, T_{STG}	50 to +150	$^\circ C$

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above $T_A=25^\circ C$ per Fig.2
2. Mounted on copper pads to each terminal of 0.31 in (8.0mm²) per Fig 5.
3. Measured at 8.3ms single half sine-wave or equivalent square wave duty cycle = 4 pulses per minutes maximum.
4. $V_F=3.0$ Volts max. for devices of $V_{(BR)} \leq 200V$, and $V_F=6.5$ Volts max. for devices of $V_{(BR)} \geq 200V$



PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

P4KE6.8 THRU P4KE440CA(GPP)

Breakdown Voltage 6.8 to 400 Volts

P4KE6.8J THRU P4KE440CAJ(OPEN JUNCTION)

Peak Pulse Power 400 Watts

Electrical Characteristic at (T_A =25°C unless otherwise noted) TABLE1

Device Type	Breakdown Voltage V _(BR) (Volts) (Note 1)		Test Current at I _r (mA)	Stand-off Voltage V _{WM} (Volts)	Maximum Reverse Leakage at V _{WM} I _D (μ A)	Maximum Peak Pulse Current I _{PPM} (Note 2) (Amps)	Maximum Clamping Voltage at I _{PPM} V _C (Volts)	Maximum Temperature Coefficient of V _(BR) (%/°C)
	MIN	MAX						
P4KE6.8/J	6.12	7.48	10	5.5	1000	37	10.8	0.06
P4KE6.8A/J	6.45	7.14	10	5.8	1000	38.1	10.5	0.06
P4KE7.5/J	6.75	8.25	10	6.05	500	34.2	11.7	0.064
P4KE7.5A/J	7.13	7.88	10	6.4	500	35.4	11.3	0.064
P4KE8.2/J	7.38	9.02	10	6.63	200	32	12.5	0.068
P4KE8.2A/J	7.79	8.61	10	7.02	200	33.1	12.1	0.068
P4KE9.1/J	8.19	10	1	7.37	50	29	13.8	0.071
P4KE9.1A/J	7.65	9.55	1	7.78	50	29.9	13.4	0.071
P4KE10/J	9	11	1	8.1	10	26.7	15	0.076
P4KE10A/J	9.5	10.5	1	8.55	10	27.6	14.5	0.076
P4KE11/J	9.9	12.1	1	8.92	5	24.7	16.2	0.078
P4KE11A/J	10.5	11.6	1	9.4	5	25.6	15.6	0.078
P4KE12/J	10.8	13.2	1	9372	5	23.1	17.3	0.081
P4KE12A/J	11.4	12.6	1	10.2	5	24	16.7	0.081
P4KE13/J	11.7	14.3	1	10.5	5	21.1	19	0.084
P4KE13A/J	12.4	13.7	1	11.1	5	22	18.2	0.084
P4KE15/J	13.5	16.5	1	12.1	5	18.2	22	0.087
P4KE15A/J	14.3	15.8	1	12.8	5	18.9	21.2	0.087
P4KE16/J	14.4	17.6	1	12.9	5	17	23.5	0.089
P4KE16A/J	15.2	16.8	1	13.6	5	17.8	22.5	0.089
P4KE18/J	16.2	19.8	1	14.5	5	15.1	26.5	0.091
P4KE18A/J	17.1	18.9	1	15.3	5	15.9	25.2	0.091
P4KE20/J	18	22	1	16.2	5	13.7	29.1	0.093
P4KE20A/J	19	21	1	17.1	5	14.4	27.7	0.093
P4KE22/J	19.8	24.2	1	17.8	5	12.5	31.9	0.095
P4KE22A/J	20.9	23.1	1	18.8	5	13.1	30.6	0.095
P4KE24/J	21.6	26.4	1	19.4	5	11.5	34.7	0.097
P4KE24A/J	22.8	25.2	1	20.5	5	12	33.2	0.097
P4KE27/J	24.3	29.7	1	21.8	5	10.2	39.1	0.099
P4KE27A/J	25.7	28.4	1	23.1	5	10.7	37.5	0.099
P4KE30/J	27	33	1	24.3	5	92	43.5	0.1
P4KE30A/J	28.5	31.5	1	25.6	5	9.7	41.4	0.1
P4KE33/J	29.7	36.3	1	26.8	5	8.4	47.7	0.101
P4KE33A/J	31.4	34.7	1	28.2	5	8.8	45.7	0.101
P4KE36/J	32.4	39.6	1	29.1	5	7.7	52	0.102
P4KE36A/J	34.2	37.8	1	30.8	5	8	49.9	0.102
P4KE39/J	35.1	42.9	1	31.6	5	7.1	56.4	0.103
P4KE39A/J	37.1	41	1	33.3	5	7.4	53.9	0.103
P4KE43/J	38.7	47.3	1	34.8	5	6.5	61.9	0.104
P4KE43A/J	40.9	45.2	1	36.8	5	6.7	59.3	0.104
P4KE47/J	42.3	51.7	1	38.1	5	5.9	67.8	0.104
P4KE47A/J	44.7	49.4	1	40.2	5	6.2	64.8	0.104
P4KE51/J	45.7	56.1	1	41.3	5	5.4	73.5	0.105
P4KE51A/J	48.5	43.6	1	43.6	5	5.7	70.1	0.105
P4KE56/J	50.4	61.6	1	45.4	5	5	80.5	0.106
P4KE56A/J	53.2	58.8	1	47.8	5	5.2	77	0.106
P4KE62/J	55.8	68.8	1	50.2	5	4.5	89	0.107
P4KE62A/J	58.9	65.1	1	53.0	5	4.7	85	0.107



PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

P4KE6.8 THRU P4KE440CA(GPP)

Breakdown Voltage 6.8 to 400 Volts

P4KE6.8J THRU P4KE440CAJ(OPEN JUNCTION)

Peak Pulse Power 400 Watts

Electrical Characteristic at (T_A =25°C unless otherwise noted) TABLE 1 (Cont'd)

Device Type	Breakdown Voltage V _{BR} (Volts) (Note 1)		Test Current at I _r (mA)	Stand-off Voltage V _{WM} (Volts)	Maximum Reverse Leakage at V _{WM} I _D (μ A) (Note3)	Maximum Peak Pulse Current I _{PPM} (Note 2) (Amps)	Maximum Clamping Voltage at I _{PPM} V _c (Volts)	Maximum Temperature Coefficient of V _{BR} (%/°C)
	MIN	MAX						
P4KE68/J	61.2	74.8	1	55.1	5	4.1	98	0.104
P4KE68A/J	64.6	71.4	1	58.1	5	4.3	92	0.104
P4KE75/J	67.5	82.5	1	60.7	5	3.7	105	0.105
P4KE75A/J	71.3	78.8	1	64.1	5	3.9	103	0.105
P4KE82/J	73.8	90.2	1	66.4	5	3.4	118	0.105
P4KE82A/J	77.9	86.1	1	70.1	5	3.5	113	0.105
P4KE91/J	81.9	100	1	73.7	5	3.1	131	0.106
P4KE91A/J	86.5	95.5	1	77.8	5	3.2	125	0.106
P4KE100/J	90	110	1	81	5	2.8	144	0.106
P4KE100A/J	95	105	1	85.5	5	2.9	137	0.106
P4KE110/J	99	121	1	89.2	5	2.5	158	0.107
P4KE110A/J	105	116	1	94	5	2.6	152	0.107
P4KE120/J	108	132	1	97.2	5	2.3	173	0.107
P4KE120A/J	114	126	1	102	5	2.4	165	0.107
P4KE130/J	117	143	1	105	5	2.1	187	0.107
P4KE130A/J	124	137	1	111	5	2.2	179	0.107
P4KE150/J	135	165	1	121	5	1.9	215	0.108
P4KE150A/J	143	159	1	128	5	1.9	207	0.108
P4KE160/J	144	175	1	130	5	1.7	230	0.108
P4KE160A/J	152	167	1	136	5	1.8	219	0.108
P4KE170/J	153	187	1	138	5	1.6	244	0.108
P4KE170A/J	162	179	1	145	5	1.7	234	0.108
P4KE180/J	162	197	1	146	5	1.6	258	0.108
P4KE180A/J	171	189	1	154	5	1.6	246	0.108
P4KE200/J	180	220	1	162	5	1.4	287	0.108
P4KE200A/J	190	210	1	171	5	1.5	274	0.108
P4KE220/J	198	242	1	175	5	1.2	344	0.108
P4KE220A/J	209	231	1	185	5	1.2	328	0.108
P4KE250/J	25	275	1	202	5	1.1	360	0.11
P4KE250A/J	237	267	1	214	5	1.2	344	0.11
P4KE300/J	270	330	1	243	5	0.93	430	0.11
P4KE300A/J	285	315	1	245	5	1	414	0.11
P4KE350/J	315	385	1	284	5	0.79	504	0.11
P4KE350A/J	332	368	1	300	5	0.83	482	0.11
P4KE400/J	360	440	1	324	5	0.7	574	0.11
P4KE400A/J	380	420	1	342	5	0.73	548	0.11
P4KE440/J	396	484	1	356	5	0.63	631	0.11
P4KE440A/J	418	462	1	376	5	0.66	602	0.11

Notes:

- (1) V_{BR} measured after I_r applied for 300ms I_r =square wave pulse or equivalent
- (2) Surge current waveform per Figure 3 and derate per Fig.2
- (3) For bidirectional type having V_{WM} of 10 volts and less, the I_D limit is doubled
- (4) All terms and symbols are consistent with ANSI/IEEE C62.35
- (5) No suffix is Gpp passivated junction, Suffix "J" is open junction (silastic guard junction)



PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR

P4KE6.8 THRU P4KE440CA(GPP)

P4KE6.8J THRU P4KE440CAJ(OPEN JUNCTION)

Breakdown Voltage 6.8 to 400 Volts

Peak Pulse Power 400 Watts

RATING AND CHARACTERISTIC CURVES P4KE6.8/J THRU P4KE440CA/J

FIG.1- PEAK PULSE POWER RATING CURVE

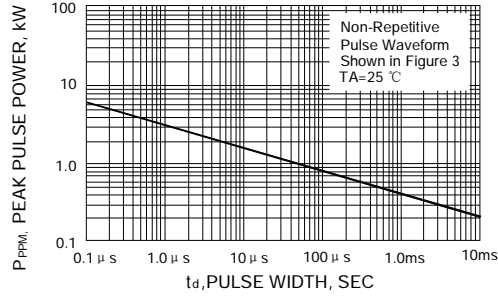


FIG.2- PULSE DERATING CURVE

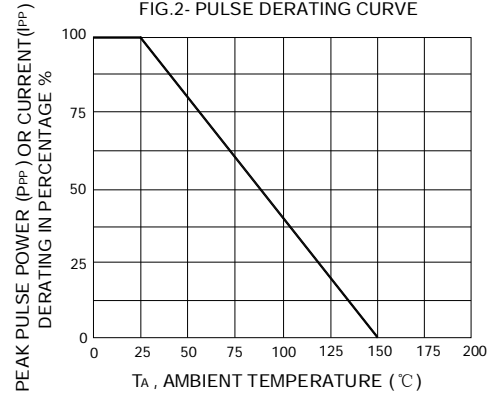


FIG.3- PULSE WAVEFORM

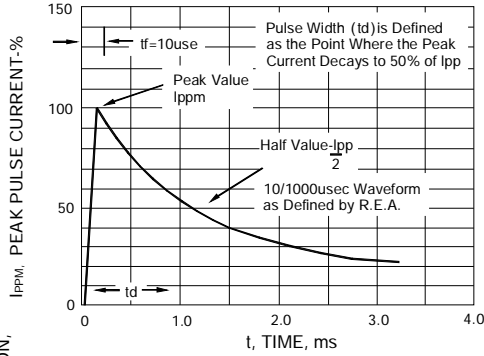


FIG.4- TYPICAL JUNCTION CAPACITANCE UNIDIRECTIONAL

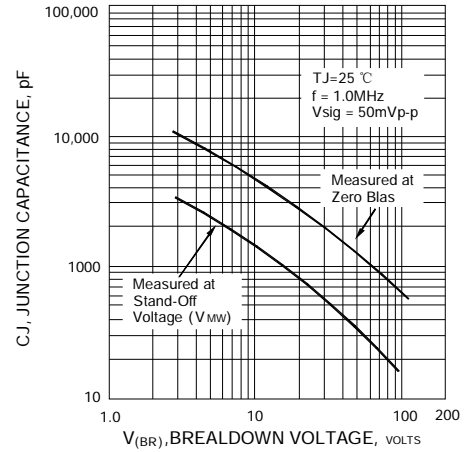


FIG.5- STEADY STATE POWER DERATING CURVE

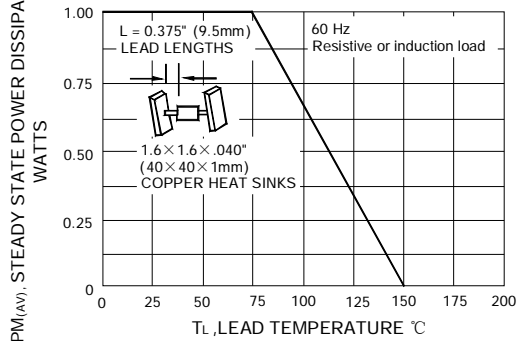


FIG.6 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

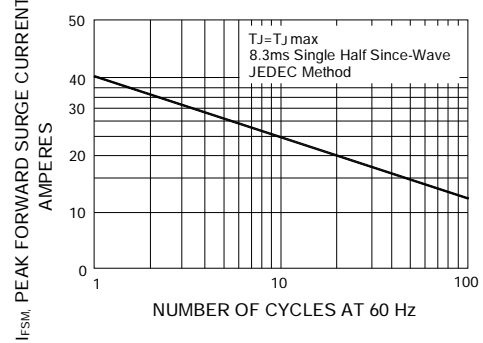


FIG.7- TYPICAL REVERSE LEAKAGE CHARACTERISTICS

