




115 MHz SINEWAVE VCXO at +3.3 Vdc

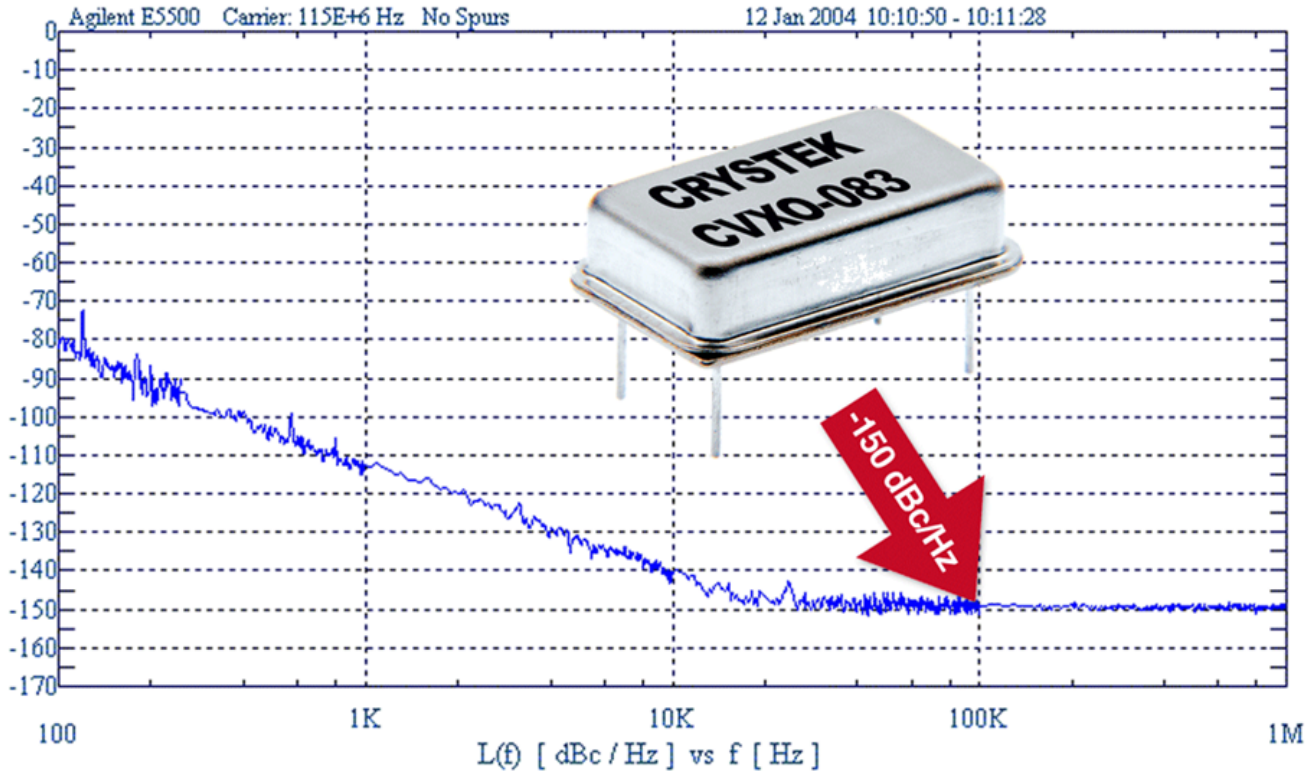

**Model CCO-083/085 (Clock Version) and CVXO-083/085 (VCXO Version) generate frequencies from 10MHz to 200MHz. This low current sinewave oscillator provides -150dBc/Hz noise floor while only consuming 8mA typical. Output level is 0dBm min. into 50 ohms, and harmonics are lower than -20dBc. The series has no sub-harmonics due to the use of Inverted Mesa (High Frequency Fundamental Crystal) technology. The oscillator is offered in extended operating temperature range (-40°C to +85°C), also available in 3.3V and 5V models. Applications include low current applications and sources for driving PLL and Mixers.**

Rev: H
Date: 13-Jun-11
Page 1 of 2



<b>Frequency Range:</b>	<b>10.000 MHz to 200.000 MHz</b>	
Temperature Range:	0°C to +70°C	
	(Option X)	-40°C to +85°C
Storage:		-45°C to 90°C
Input Voltage:	(Option 3)	3.3V ±0.3V
	(Option 5)	5.0V ±0.5V
Input Current:		8mA Typ., 15mA Max @ 3.3V
		12mA Typ., 20mA Max @5.0V
Output:		True Sinewave
Load:		50 Ω
Power (std):		0dBm Min. into 50 Ω
	(Option B)	+3dBm Min. into 50 Ω
	(Option C)	+5dBm Min. into 50 Ω
	(Option D)	+7dBm Min. into 50 Ω
Harmonics:		-20dBc Max
Sub-Harmonics:		None
Enable/Disable:		None
Phase Noise Floor:		-150dBc Typical
Aging:		<3ppm 1st/yr, <1ppm thereafter
CCO-083/085 Options Temperature Range:		0°C to +70°C (±25ppm Max)
		-40°C to +85°C (±50ppm Max)
CVXO-083/085	Frequency Pulling:	±50ppm APR Min.
	Control Voltage	(083): 1.65V ±1.65V
		(085): 2.5V ±2.0V
	Settability	(083): 1.65V ±0.25V
		(085): 2.5V ±0.5V
	Linearity:	±10% Max


**Phase Noise Typ.:**

100 Hz	-80 dBc/Hz
1 kHz	-112 dBc/Hz
10 kHz	-140 dBc/Hz
100 kHz	-150 dBc/Hz


**Part Number Example**

CCO-083-100.000 = 3.3V, 0°C to +70°C (±25ppm), 100MHz

CVXO-085XC-100.000 = 5.0V, -40°C to +85°C (±50ppmAPR), +5dBm, 100MHz

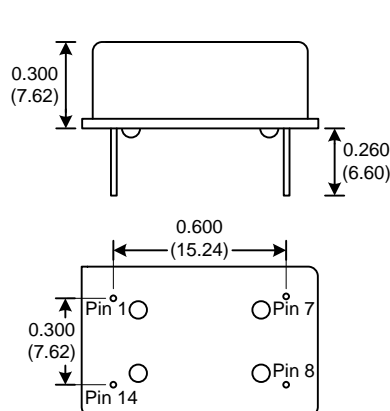

Dimensions inches (mm)  
All dimensions are Max unless otherwise specified.

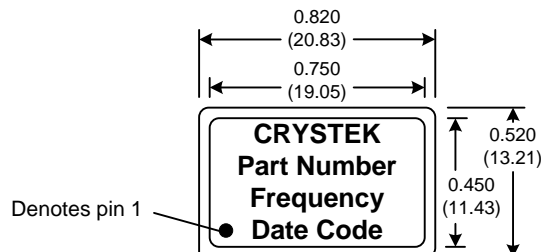

PIN	Connection
1	N/C or Volt Cntrl
7	GND
8	Output
14	Vdd

Rev: H  
Date: 13-Jun-11  
Page 2 of 2