


SHEET 1 OF 1

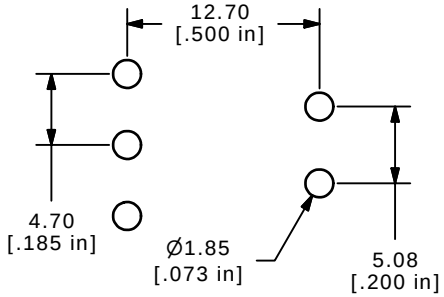


P.C. MOUNTING

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	N/A	2-1

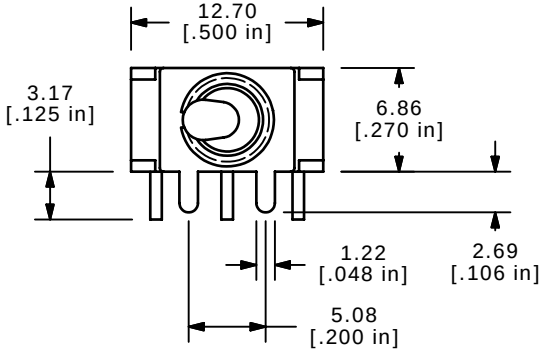


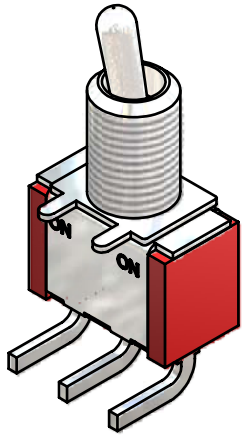


ISOMETRIC

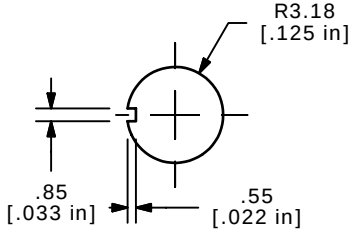


PANEL MOUNTING

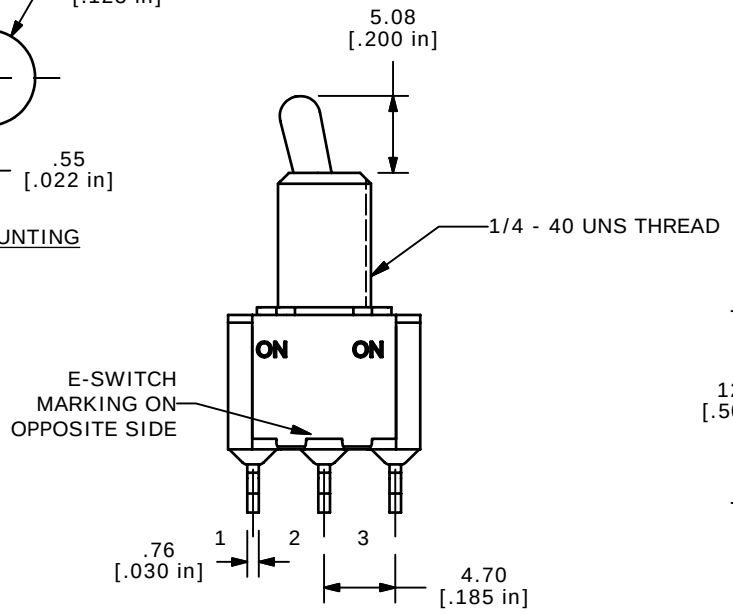

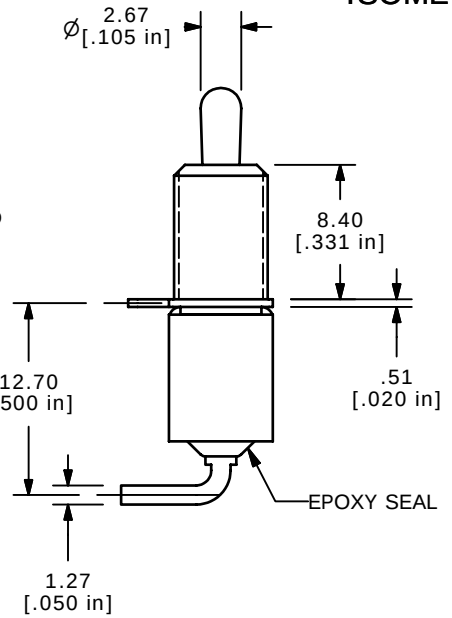

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX @ 20VAC OR DC MAX.
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
▲10. HARDWARE TO BE SHIPPED BULK
   T100011 - LOCKWASHER, QTY 1
   T100015 - LOCKRING, QTY 1
   T100000 - HEXNUT, QTY 2
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT.



CIRCUIT: SPDT

REV	PCR NO	DESCRIPTION	DATE	BY
A	16268	RELEASED FOR PRODUCTION	7/31/06	BO

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100SP1T2B1M6REH

SCALE	DATE	DR	DWG	REV
2:1	7/31/2006	BO	ST111003	A