

|                      |                 |         |                  |
|----------------------|-----------------|---------|------------------|
| <b>Specification</b> | <b>AXLE184B</b> | Rev.: 2 | Date: 2014-04-06 |
|----------------------|-----------------|---------|------------------|

**Oscillator type:** SMD (VC)TCXO in gull wing package

| Parameter                              | min.                                                    | typ. | max. | Unit  | Condition                                                                              |
|----------------------------------------|---------------------------------------------------------|------|------|-------|----------------------------------------------------------------------------------------|
| <b>Frequency range</b>                 | 6                                                       |      | 190  | MHz   | Clipped Sine wave                                                                      |
|                                        | 6                                                       |      | 190  | MHz   | Sine wave                                                                              |
|                                        | 1                                                       |      | 800  | MHz   | HCMOS, PECL, LVDS                                                                      |
| <b>Frequency stability</b>             |                                                         |      |      | ppm   |                                                                                        |
| vs. operating temperature range        | ±0.5 to ±5<br>See tables 1 & 2                          |      |      | ppm   | Option 4 & 5                                                                           |
| vs. supply voltage variation           |                                                         | ±0.1 | ±0.3 | ppm   | V <sub>S</sub> ±5 %                                                                    |
| vs. load change                        |                                                         |      | ±0.2 | ppm   | Load ±10 %                                                                             |
| Long term (aging) per year             |                                                         |      | ±1   | ppm   | @+40°C                                                                                 |
| <b>Frequency adjustment range</b>      |                                                         |      |      |       |                                                                                        |
| Mechanical (internal trimmer)          | ±3                                                      |      |      | ppm   | Option 1 = blank                                                                       |
| Electronic Frequency Control (EFC)     | ±5                                                      |      |      | ppm   | Option 1 = "V"                                                                         |
| EFC voltage V <sub>C</sub>             | 0.15                                                    | 1.65 | 3.15 | V     | Option 2 = "3"                                                                         |
|                                        | 0.5                                                     | 2.5  | 4.5  | V     | Option 2 = "5"                                                                         |
| EFC slope (Δf / ΔV <sub>C</sub> )      | Positive                                                |      |      |       |                                                                                        |
| EFC input impedance                    | 100                                                     |      |      | kΩ    |                                                                                        |
| <b>RF output</b>                       |                                                         |      |      |       |                                                                                        |
| Signal waveform                        | Clipped Sine wave<br>Sine wave<br>HCMOS<br>PECL<br>LVDS |      |      |       | Option 3 = "C"<br>Option 3 = "S"<br>Option 3 = "H"<br>Option 3 = "P"<br>Option 3 = "L" |
| Load                                   | 10 kΩ    10 pF<br>50 Ω<br>15 pF<br>50 Ω + Bias          |      |      |       | Option 3 = "C"<br>Option 3 = "S"<br>Option 3 = "H"<br>Option 3 = "P" or "L"            |
| Amplitude                              | 0.8                                                     |      |      | V p-p | Option 3 = "C" / 3.3 V                                                                 |
|                                        | 1.0                                                     |      |      | V p-p | Option 3 = "C" / 5.0 V                                                                 |
|                                        |                                                         | 0    |      | dBm   | Option 3 = "S" / 3.3 V                                                                 |
|                                        |                                                         | +10  |      | dBm   | Option 3 = "S" / 5.0 V                                                                 |
|                                        | According to relevant Logic Standard                    |      |      |       | Option 3 = "H", "P", "L"                                                               |
| <b>Supply voltage V<sub>S</sub></b>    | 3.15                                                    | 3.3  | 3.45 | V     | Option 2 = "3"                                                                         |
|                                        | 4.75                                                    | 5.0  | 5.25 | V     | Option 2 = "5"                                                                         |
| <b>Current consumption</b><br>(Note 2) | 2 ~ 30                                                  |      |      | mA    | Option 3 = "C"                                                                         |
|                                        | 12 ~ 30                                                 |      |      | mA    | Option 3 = "S"                                                                         |
|                                        | 15 ~ 50                                                 |      |      | mA    | Option 3 = "H"                                                                         |
|                                        | 25 ~ 100                                                |      |      | mA    | Option 3 = "P" or "L"                                                                  |
| <b>Enclosure (see drawing) (LxWxH)</b> | 18.6x12.0x7.3 max.                                      |      |      | mm    | Pin compatible to CO 02                                                                |
| <b>Weight</b>                          |                                                         |      | 5    | g     |                                                                                        |
| <b>Packing</b>                         | Tape & Reel                                             |      |      |       | IEC 60286-3                                                                            |

**Notes:**

1. Terminology and test conditions are according to IEC60679-1 and MIL-PRF-55310, unless otherwise stated
2. Depending on frequency and supply voltage
3. All combinations of options might not be available. Please consult factory

### Absolute Maximum Ratings

| Parameter             | min. | max.         | Unit | Condition    |
|-----------------------|------|--------------|------|--------------|
| Supply Voltage $V_S$  | -0.5 | $V_S + 10\%$ | V    | $V_S$ to GND |
| Control Voltage $V_C$ | -0.5 | 6            | V    | $V_C$ to GND |
| Storage Temperature   | -55  | +105         | °C   |              |

### Frequency stability vs. temperature

| Option 4 | Stability<br>[ppm] |
|----------|--------------------|
| 05       | ±0.5               |
| 10       | ±1.0               |
| 15       | ±1.5               |
| 20       | ±2.0               |
| 25       | ±2.5               |
| 30       | ±3.0               |
| 35       | ±3.5               |
| 50       | ±5.0               |

Table 1

| Lower Temperature |        | Upper Temperature |        |
|-------------------|--------|-------------------|--------|
| Option 5          | T [°C] | Option 5          | T [°C] |
| 0                 | 0      | A                 | +50    |
| 1                 | -10    | B                 | +60    |
| 2                 | -20    | C                 | +70    |
| 3                 | -30    | D                 | +75    |
| 4                 | -40    | E                 | +80    |
|                   |        | F                 | +85    |
|                   |        |                   |        |
|                   |        |                   |        |

Table 2

### Ordering Code


| Model    | Option 1<br>[EFC]* | Option 2<br>[Supply<br>Voltage] | Option 3<br>[RF<br>output] | Option 4<br>[Stability] | Option 5<br>[Temperature<br>range] | Revision | Frequency [MHz] |
|----------|--------------------|---------------------------------|----------------------------|-------------------------|------------------------------------|----------|-----------------|
| AXLE184B | _ or "V"           | 3 or 5                          | C, S, H, P, L              | Table 1                 | Table 2                            | Rev.2    | 10.000          |

Example: AXLE184B-V-5-S-10-3D\_Rev.2 – 10.000 MHz

### Handling and Testing

| Parameter                     | Procedure                                                           |     | Source        |
|-------------------------------|---------------------------------------------------------------------|-----|---------------|
| Handling and Testing          | Application Note AXAN-011                                           |     | www.axtal.com |
| Processing                    | Application Note AXAN-012                                           |     | www.axtal.com |
|                               |                                                                     |     |               |
| Parameter                     | Procedure                                                           |     | Condition     |
| Electrostatic discharge (ESD) |                                                                     |     |               |
| THD devices                   | IEC60749-26                                                         | HBM | 2000 V        |
| SMD devices                   | IEC60749-27                                                         | MM  | 200 V         |
| Washable                      | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |     |               |
| RoHS compliant                | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |     |               |

## Enclosure drawing

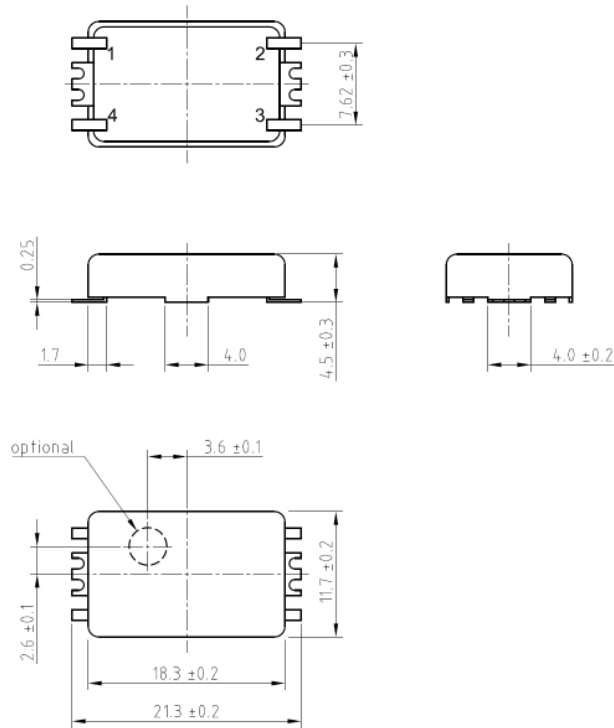

### Pin connections (Without EFC)

| Pin # | Symbol           | Function                                                 |
|-------|------------------|----------------------------------------------------------|
| 1     | N.C. or Comp OUT | No Connection or Complementary RF Output (PECL and LVDS) |
| 2     | GND              | Ground                                                   |
| 3     | RF OUT           | RF Output                                                |
| 4     | V <sub>s</sub>   | Supply Voltage                                           |

### Pin connections (With EFC)

| Pin # | Symbol         | Function              |
|-------|----------------|-----------------------|
| 1     | V <sub>c</sub> | Control Voltage (EFC) |
| 2     | GND            | Ground                |
| 3     | RF OUT         | RF Output             |
| 4     | V <sub>s</sub> | Supply Voltage        |

## Environmental conditions

| Test                                            | IEC 60068 Part ... | IEC 60679-1 Clause | MIL-STD-202G Method | MIL-STD-810F Method | MIL-PRF-55310D Clause | Test conditions (IEC)                                                              |
|-------------------------------------------------|--------------------|--------------------|---------------------|---------------------|-----------------------|------------------------------------------------------------------------------------|
| Sealing tests (if applicable)                   | 2-17               | 5.6.2              | 112E                |                     | 3.6.1.2               | Gross leak: Test Qc, Fine leak: Test Qk                                            |
| Solderability<br>Resistance to soldering heat   | 2-20<br>2-58       | 5.6.3              | 208H<br>210F        |                     | 3.6.52<br>3.6.48      | Test Ta Method 1<br>Test Td <sub>1</sub> Method 2<br>Test Td <sub>2</sub> Method 2 |
| Shock*                                          | 2-27               | 5.6.8              | 213B                | 516.4               | 3.6.40                | Test Ea, 3 x per axes 100g, 6 ms half-sine pulse                                   |
| Vibration, sinusoidal*                          | 2-6                | 5.6.7.1            | 201A<br>204D        | 516.4-4             | 3.6.38.1<br>3.6.38.2  | Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g                 |
| Vibration, random*                              | 2-64               | 5.6.7.3            | 214A                | 514.5               | 3.6.38.3<br>3.6.38.4  | Test Fdb                                                                           |
| Endurance tests<br>- ageing<br>- extended aging |                    | 5.7.1<br>5.7.2     | 108A                |                     | 4.8.35                | 30 days @ 85°C, OCXO @25°C<br>1000h, 2000h, 8000h @85°C                            |

Other environmental conditions on request

Data sheet is for information purposes only and may be subject to modifications or may be discontinued without notice.

### Revision History

| Rev. | Drawing | Date<br>[dd.mm.yyyy] | Remarks                                             | Author | Checked |
|------|---------|----------------------|-----------------------------------------------------|--------|---------|
| 2    | D1      | 01.10.2012           | Editorial changes                                   | BN     | BN      |
| 2    | D2      | 06.04.2014           | Environmental conditions updated, editorial changes | HH     | HH      |