


ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



0RQB-C0U Series RoHS Compliant PRELIMINARY Rev.A

- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Input Under Voltage Lockout
- Fixed Frequency (285 kHz)
- Input Over Voltage Lockout
- Active Low/High (Option)
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense
- Basic Isolation
- Safety Approval to UL60950-1 (UL/cUL)

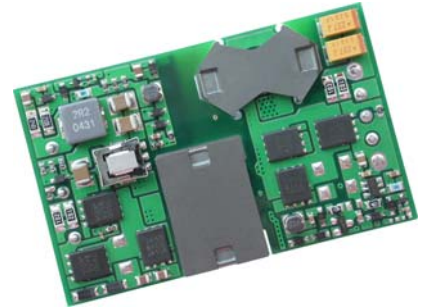

Description

The 0RQB-C0U Series are isolated dc/dc converters that operate from a nominal 48 Vdc source. These units will provide up to 100 W of output power from a nominal 48 Vdc input. These units are designed to be highly efficient and low cost. Typical efficiency of 12 Vdc output at 48 Vdc input at full load is 91%. Features include remote on/off, over current protection and under-voltage lockout. These converters are provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12 Vdc	18 Vdc - 75 Vdc	8.35 A	100 W	91%	0RQB-C0U120	0RQB-C0U12L
5.0 Vdc	18 Vdc - 75 Vdc	20 A	100 W	90%	0RQB-C0U050	0RQB-C0U05L
3.3 Vdc	18 Vdc - 75 Vdc	25 A	82.5 W	90%	0RQB-C0U033	0RQB-C0U03L
2.5 Vdc	18 Vdc - 75 Vdc	30 A	75 W	89.5%	0RQB-C0U025	0RQB-C0U02L
1.8 Vdc	18 Vdc - 75 Vdc	30 A	54 W	85%	0RQB-C0UV80	0RQB-C0UV8L
1.5 Vdc	18 Vdc - 75 Vdc	30 A	45 W	83%	0RQB-C0UV50	0RQB-C0UV5L
1.2 Vdc	18 Vdc - 75 Vdc	30 A	36 W	80%	0RQB-C0UV20	0RQB-C0UV2L

Notes: 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.

2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	No Operating
	-	-	75 V	Operating
Remote On/Off	-0.3 V	-	18 V	
I/O Isolation Voltage	-	-	2000 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	18 V	48 V	75 V	
Input Current (full load)				
Vo=12 V	-	-	7.0 A	
Vo=5.0 V	-	-	7.0 A	
Vo=3.3 V	-	-	6.0 A	
Vo=2.5 V	-	-	5.5 A	
Vo=1.8 V	-	-	4.0 A	
Vo=1.5 V	-	-	3.5 A	
Vo=1.2 V	-	-	3.0 A	
Input Current (no load)	-	100 mA	180 mA	
Remote Off Input Current		10 mA	15 mA	
Input Reflected Ripple Current (pk-pk)	-	20 mA	40 mA	Tested with simulated source impedance of 10 uH, 5 Hz to 20 MHz BW; use a 0.47 uF/100 V ceramic cap and a 100 uF /100 V electrolytic cap with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (rms)	-	5 mA	10 mA	
I ² t Inrush Current Transient	-	0.05 A ² s	0.1 A ² s	
Turn-on Voltage Threshold	16.5 V	17.0 V	17.5 V	
Turn-off Voltage Threshold	15.5 V	16.0 V	16.5 V	
Input over voltage Lockout	76 V	78 V	80 V	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				
Vo=12 V	11.820 V	12.00 V	12.180 V	Vin=48 V, Io=50% full load
Vo=5.0 V	4.925 V	5.00 V	5.075 V	
Vo=3.3 V	3.251 V	3.30 V	3.360 V	
Vo=2.5 V	2.455 V	2.50 V	2.545 V	
Vo=1.8 V	1.773 V	1.80 V	1.827 V	
Vo=1.5 V	1.448 V	1.50 V	1.523 V	
Vo=1.2 V	1.182 V	1.20 V	1.218 V	
Line Regulation				
Vo=12 V	-	±24 mV	±120 mV	
Vo=5.0 V	-	±10 mV	±25 mV	
Vo=3.3 V	-	±4 mV	±15 mV	
Vo=2.5 V	-	±4 mV	±10 mV	
Vo=1.2 V-1.8 V	-	±3 mV	±6 mV	
Load Regulation				
Vo=12 V	-	±30 mV	±80 mV	
Vo=5.0 V	-	±10 mV	±25 mV	
Vo=3.3 V -2.5 V	-	±8 mV	±15 mV	
Vo=1.2 V -1.8 V	-	±5 mV	±10 mV	
Regulation Over Temperature (-40 °C to +85 °C)				
Vo=12 V	-	±60 mV	±100 mV	
Vo=5.0 V	-	±40 mV	±65 mV	
Vo=3.3 V	-	±30 mV	±50 mV	
Vo=2.5 V	-	±20 mV	±50 mV	
Vo=1.8 V-1.2 V	-	±15 mV	±30 mV	

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes	
Output Current Range						
	Vo=12 V	0 A	-	8.35 A		
	Vo=5.0 V	0 A	-	20 A		
	Vo=3.3 V	0 A	-	25 A		
	Vo=1.2 V -2.5 V	0 A	-	30 A		
Current Limit Threshold						
	Vo=12 V	9.2 A	10.5 A	13 A		
	Vo=5.0 V	24 A	26 A	30 A		
	Vo=3.3 V	27 A	32 A	35 A		
	Vo=2.5 V	35 A	40 A	45 A		
	Vo=1.2 V -1.8 V	-	36 A	-		
Short Circuit Surge Transient		-	3 A ² s	5 A ² s		
Vin=48 V ; Ripple and Noise (rms)					Test conditions: 0-20 MHz BW, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.	
	Vo=12 V	-	30 mV	50 mV		
	Vo=5.0 V	-	25 mV	40 mV		
	Vo=3.3 V -2.5 V	-	20 mV	40 mV		
	Vo=1.2 V -1.8 V	-	15 mV	30 mV		
Vin=24 V ; Ripple and Noise (rms)						
	Vo=12 V	-	25 mV	40 mV		
	Vo=5.0 V	-	20 mV	30 mV		
	Vo=3.3 V	-	15 mV	25 mV		
	Vo=1.2 V -2.5 V	-	10 mV	20 mV		
Vin=48 V ; Ripple and Noise (pk-pk)					Test conditions: 0-20 MHz BW, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.	
	Vo=12 V	-	100 mV	150 mV		
	Vo=5.0 V	-	75 mV	120 mV		
	Vo=3.3 V -2.5 V	-	50 mV	100 mV		
	Vo=1.2 V -1.8 V	-	40 mV	80 mV		
Vin=24 V ; Ripple and Noise (pk-pk)						
	Vo=12 V	-	75 mV	120 mV		
	Vo=5.0 V	-	50 mV	100 mV		
	Vo=3.3 V	-	35 mV	70 mV		
	Vo=2.5 V	-	30mV	60 mV		
	Vo=1.2 V -1.8 V	-	25 mV	50 mV		
Turn on Time		10 mS	-	100 mS		
Overshoot at Turn on		-	0%	5%		
Output Capacitance						
	Vo=12.0 V	0 uF	-	1200 uF		
	Vo=5.0 V	0 uF	-	6800 uF		
	Vo=3.3 V	0 uF	-	15000 uF		
	Vo=1.2 V-2.5 V	0 uF	-	20000 uF		
Transient Response						
50% ~ 75% Max Load	Overshoot	Vo=12.0 V	-	360 mV	480 mV	Test conditions: di/dt = 0.1 A/uS, Vin=48 V , with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.
	Settling Time		-	100 uS	250 uS	
75% ~ 50% Max Load	Overshoot		-	360 mV	480mV	
	Settling Time		-	150 uS	250 uS	
50% ~ 75% Max Load	Overshoot	Vo=5.0 V	-	200 mV	300 mV	
	Settling Time		-	100 uS	150 uS	
75% ~ 50% Max Load	Overshoot		-	200 mV	300 mV	
	Settling Time		-	100 uS	150 uS	
50% ~ 75% Max Load	Overshoot	Vo=3.3 V	-	150 mV	200 mV	
	Settling Time		-	100 uS	100 uS	
75% ~ 50% Max Load	Overshoot		-	150 mV	200 mV	
	Settling Time		-	100 uS	100 uS	

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes
Transient Response					
50% ~ 75% Max Load	Overshoot	Vo=2.5 V,	150 mV	200 mV	Test conditions: di/dt = 0.1 A/uS, Vin=48 V, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.
	Settling Time		85 uS	100 uS	
75% ~ 50% Max Load	Overshoot		150 mV	200 mV	
	Settling Time		85 uS	100 uS	
50% ~ 75% Max Load	Overshoot	Vo=1.2 V-1.8 V	50 mV	80 mV	
	Settling Time		100 uS	150 uS	
75% ~ 50% Max Load	Overshoot		50 mV	80 mV	
	Settling Time		100 uS	150 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				
Vo=12 V	88%	91%	-	Vin=48 V, full load , Ta=25 °C
Vo=5.0 V	88%	90%	-	
Vo=3.3 V	88%	90%	-	
Vo=2.5 V	88%	89.5%	-	
Vo=1.8 V	-	85%	-	
Vo=1.5 V	-	83%	-	
Vo=1.2 V	-	80%	-	
Efficiency				
Vo=12 V	-	92%	-	Vin=24 V, full load , Ta=25 °C
Vo=5.0 V	-	91%	-	
Vo=3.3 V	89%	91%	-	
Vo=2.5 V	-	87%	-	
Vo=1.8 V	-	85%	-	
Vo=1.5 V	-	83%	-	
Vo=1.2 V	-	80%	-	
Switching Frequency	240 kHz	285 kHz	320 kHz	
Isolation capacitance	-	1500 pF	-	
Input to Output Isolation Voltage	-	-	2000 V	
Remote Sense Compensation	-	-	10% Vo	The total voltage increased by trim and remote sense should not exceed 10%Vo.
Output Voltage Trim Range	80% Vo	-	110% Vo	
Over Temperature Protection	-	125 °C	-	
Over Voltage Protection	-	130% Vo	-	Vin=48V, full load, Hiccup mode
MTBF	TBD			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				
Inches	2.30 x 1.45 x 0.395			
millimeters	58.42 x 36.83 x 10.03			
Weight	-	40 g	-	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Control Specifications


Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	0RQB-C0UxxL. The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.4 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	0RQB-C0Uxx0. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.4 V	-	18 V	
Current Sink		0 mA	-	0.75 mA	

Output Trim Equations


Equations for calculating the trim resistor are shown below (Unit: kΩ). The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.

1) For Vo=1.5 V - 12 V:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

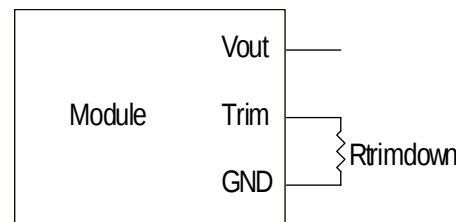

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

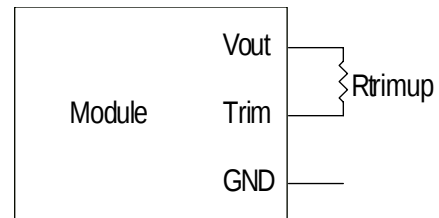

2) For Vo=1.2 V:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 313}{0.6125 \cdot \delta} - 10.22$$

Notes:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$


V_{o_req}=Desired (trimmed) output voltage [V]; V_o=output voltage

ISOLATED DC/DC CONVERTERS


48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs




Efficiency Data

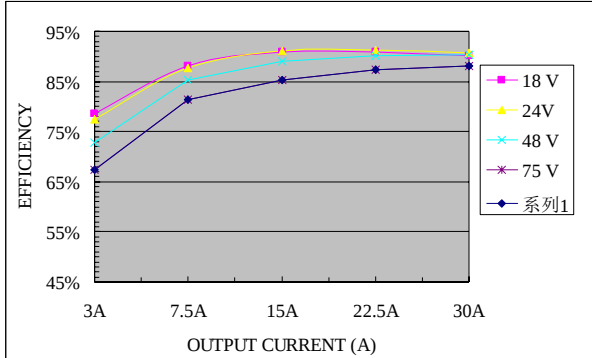


Vo=2.5 V

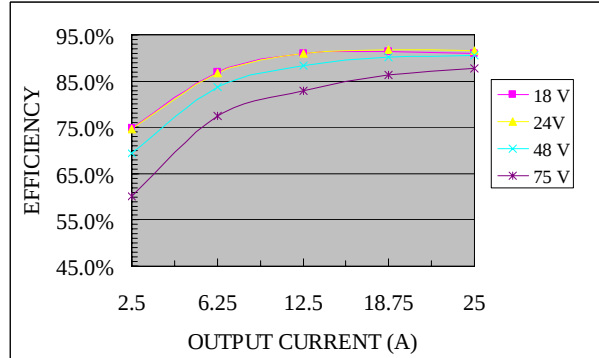

Vo=3.3 V

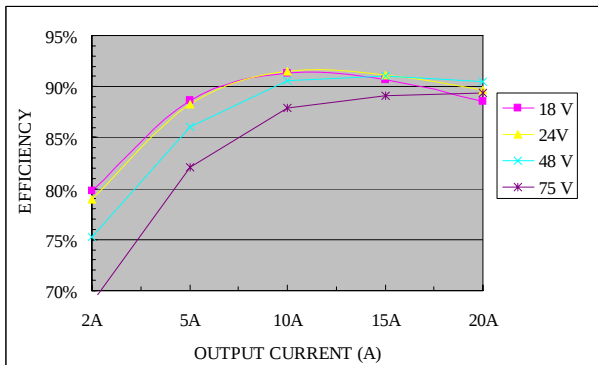


Vo=5.0 V

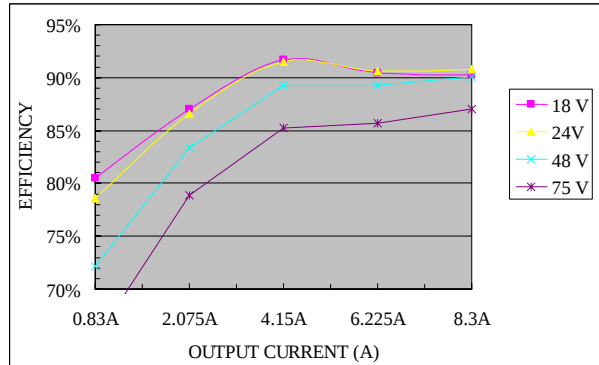


Vo=12 V

Thermal Derating Curves

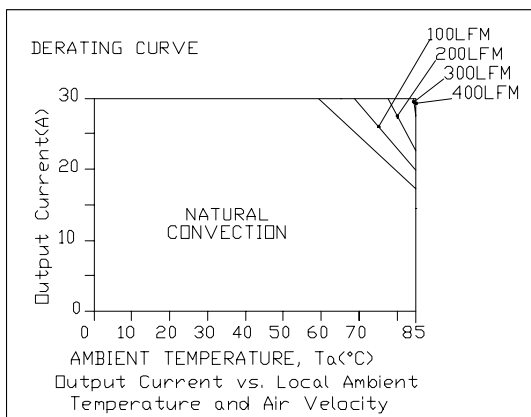

Vo=2.5 V, Vin=48 V

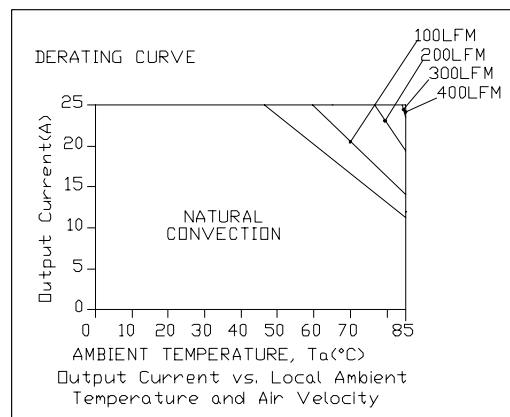


Vo=3.3 V, Vin=48 V

ISOLATED DC/DC CONVERTERS


48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Thermal Derating Curves (continued)

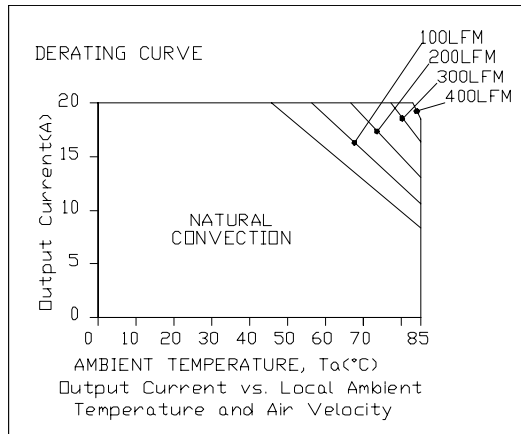


$V_o=5.0\text{ V}$, $V_{in}=48\text{ V}$

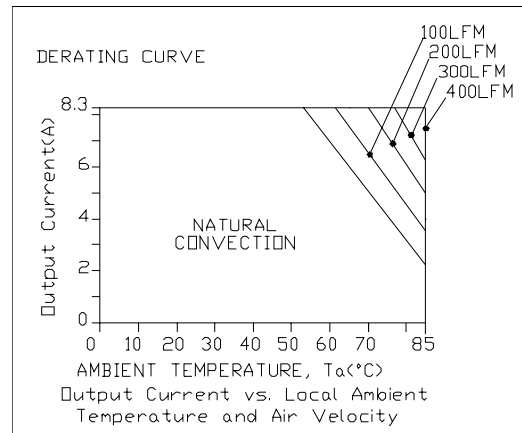


$V_o=12\text{ V}$, $V_{in}=48\text{ V}$

Ripple and Noise Waveforms

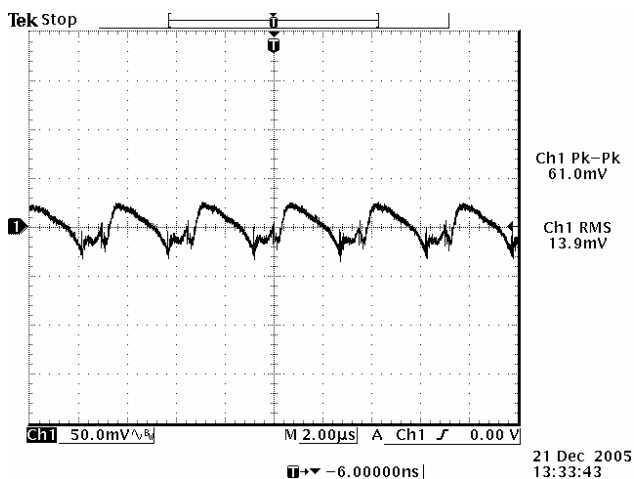

2.5 V/30 A output

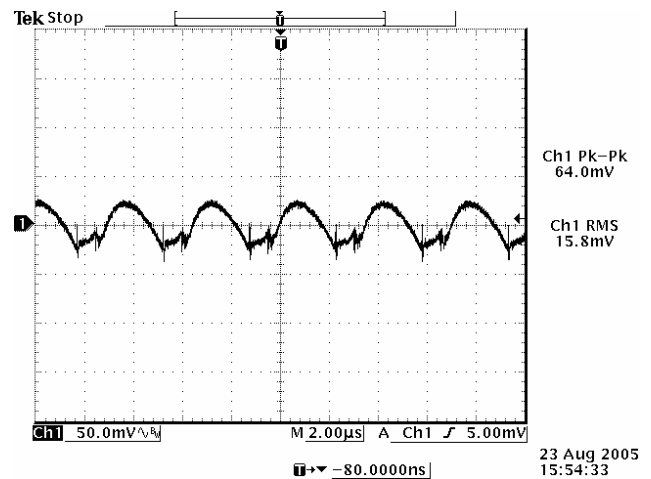


3.3 V/25 A output

ISOLATED DC/DC CONVERTERS


48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs



Ripple and Noise Waveforms (continued)

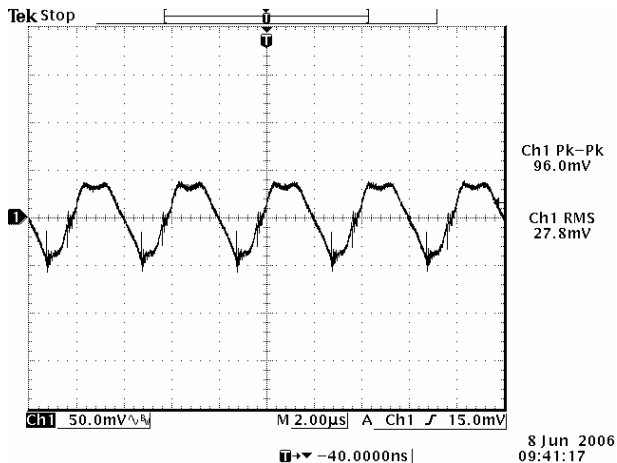


5.0 V/20 A output

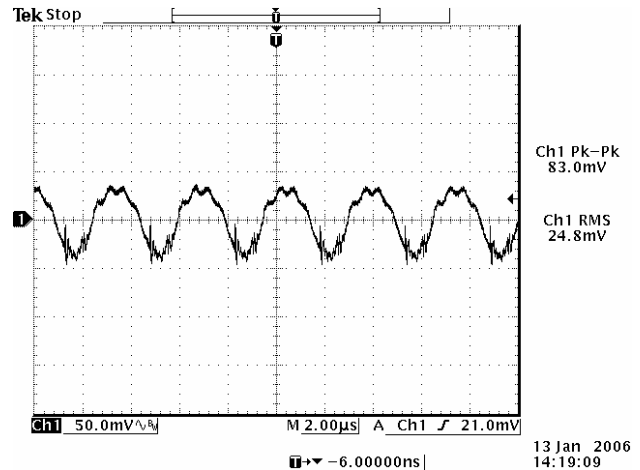


12 V/8.35 A output

Note: Ripple and noise at full load, 48 V input, with a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor at the output, and $T_a=25$ deg C.

Transient Response Waveforms

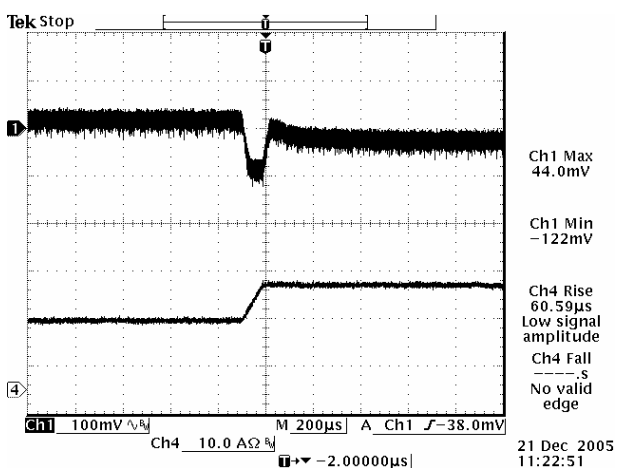

$V_{out}=2.5$ V 50%-75% Load Transients at $V_{in}=48$ V

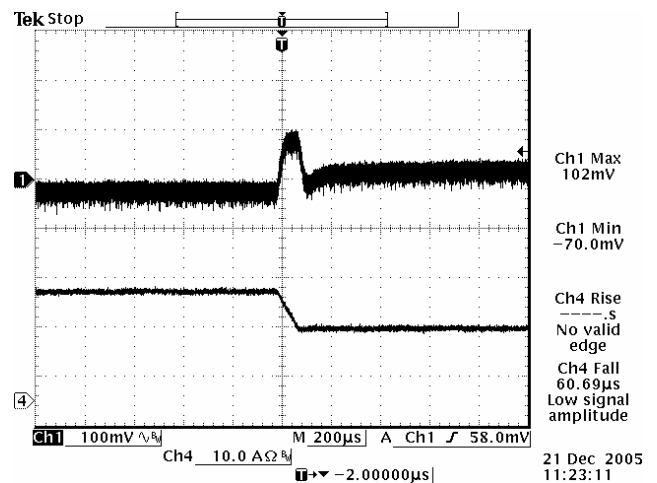



$V_{out}=2.5$ V 75%-50% Load Transients at $V_{in}=48$ V

ISOLATED DC/DC CONVERTERS

48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs





Transient Response Waveforms (continued)

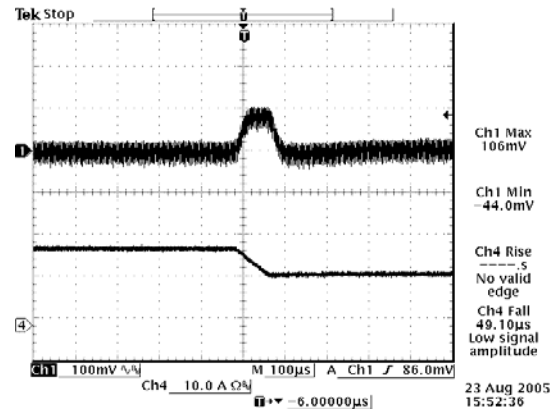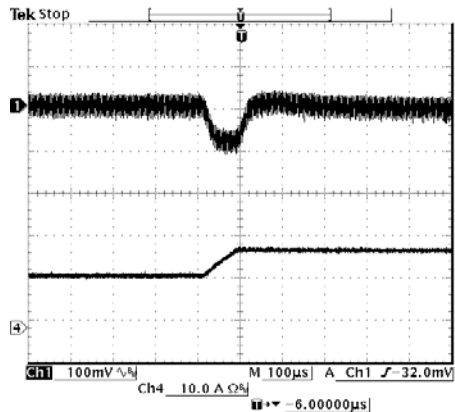



Vout= 3.3 V 50%-75% Load Transients at Vin=48 V

Vout= 3.3 V 75%-50% Load Transients at Vin=48 V

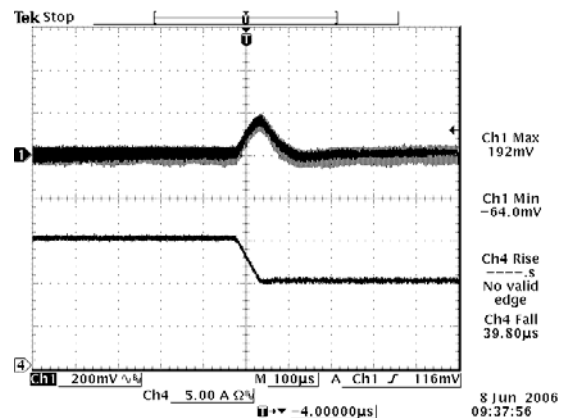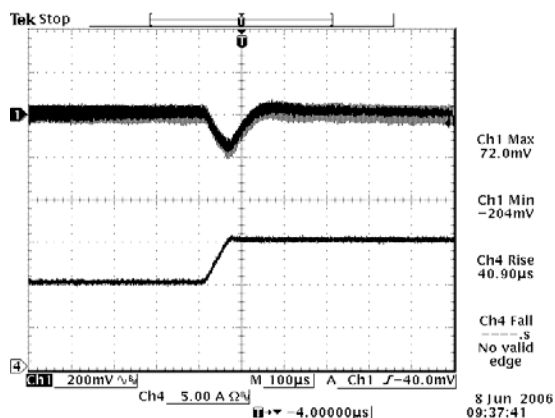

Vout= 5.0 V 50%-75% Load Transients at Vin=48 V

Vout= 5.0 V 75%-50% Load Transients at Vin=48 V

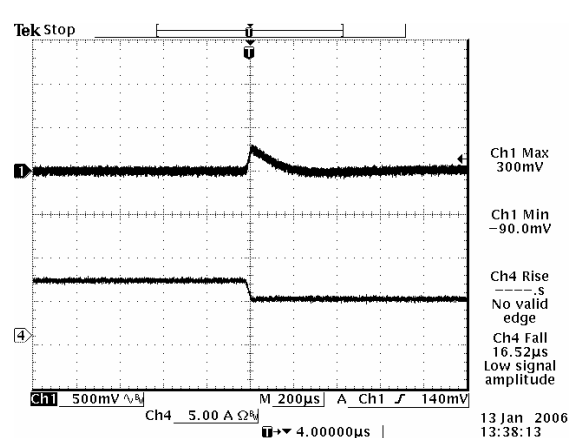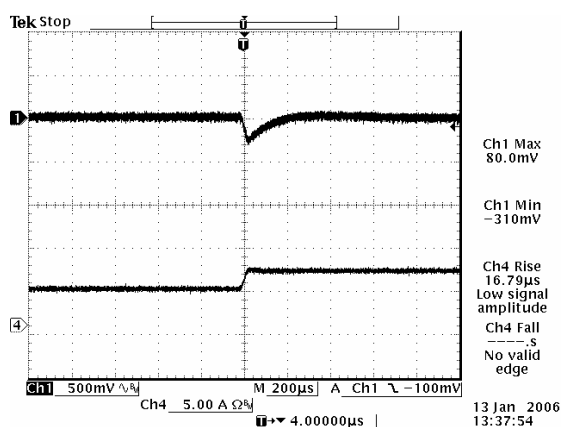

Vout= 12 V 50%-75% Load Transients at Vin=48 V


Vout= 12 V 75%-50% Load Transients at Vin=48 V

Note: Transients at $di/dt = 0.1 \text{ A}/\mu\text{S}$, $V_{in}=48 \text{ V}$, with a $1 \mu\text{F}$ ceramic capacitor and a $10 \mu\text{F}$ Tantalum capacitor at the output, $T_a=25 \text{ deg C}$.


48 Vdc Input, 12 Vdc/8.35 A, 5 Vdc/20 A, 3.3 Vdc/25 A, 1.2-2.5 Vdc/30 A Outputs




Mechanical Outline

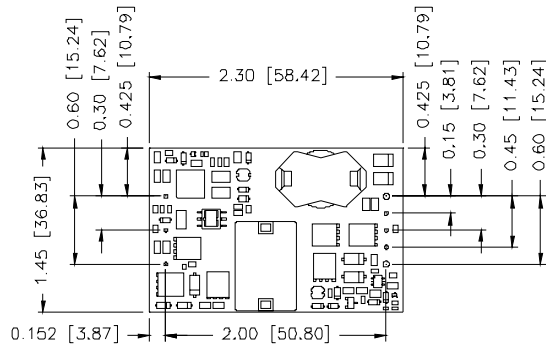


TOP VIEW




BOTTOM VIEW

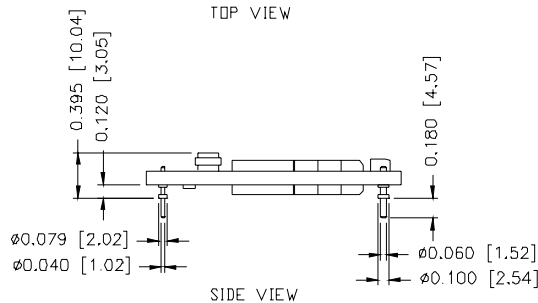

SIDE VIEW

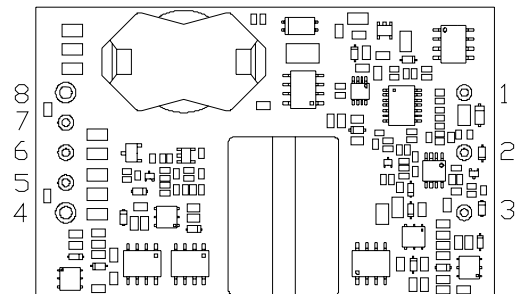

BOTTOM VIEW

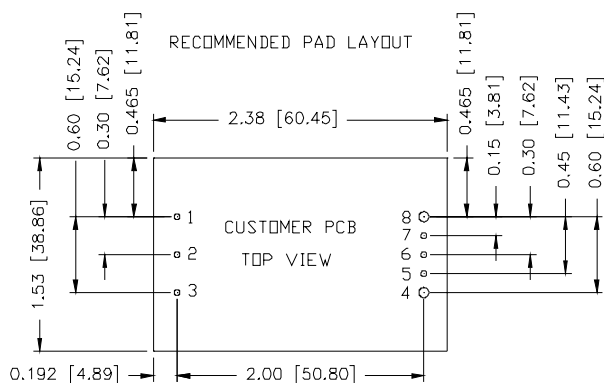

1,2,3,5,6,7 $\phi 0.047$ HOLE SIZE, $\phi 0.08$ min PAD SIZE
4,8 $\phi 0.07$ HOLE SIZE, $\phi 0.10$ min PAD SIZE

Pin Connections

Pin	Function	Pin Size
1	Vin (+)	0.04"
2	Remote On/Off	0.04"
3	Vin (-)	0.04"
4	Vout (-)	0.062"
5	Remote Sense (-)	0.04"
6	Trim	0.04"
7	Remote Sense (+)	0.04"
8	Vout (+)	0.062"

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 030307

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com