HSF

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+33%G.F UL94V-0
LCP+30%G.F UL94V-0
6P-64P With Slot "E" ⚠1

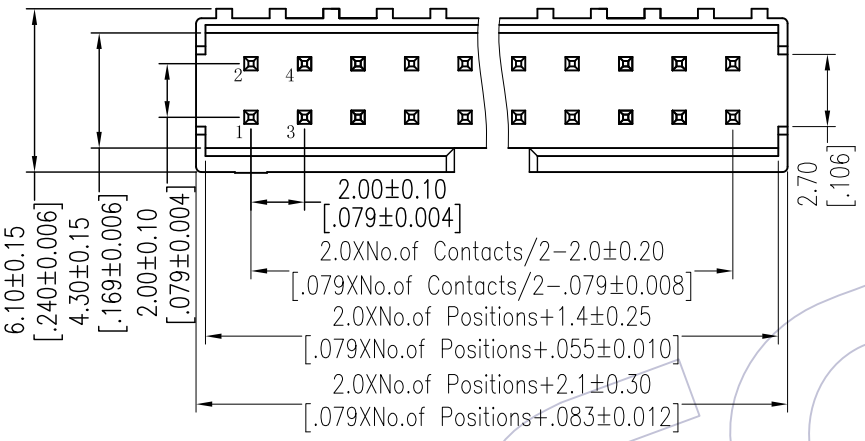

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

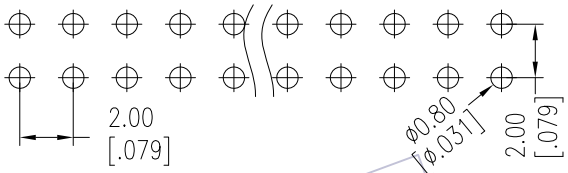

Ordering Information

3122-XX S XX B K00 X X

No.of Pins	Contact Plating	Color Insulator	Packing
⚠1 06 26	G0=Gold Flash	B=Black	T=Tube
08 28	G3=10u"Gold	W=White	
10 30	G4=15u"Gold		
12 34	G5=30u"Gold		
14 36	S0=Gold Flash/Tin		
16 40	S3=10u"Gold/Tin		
18 44	S4=15u"Gold/Tin		
20 50	S5=30u"Gold/Tin		
22 60	SN=Tin		
24 64			

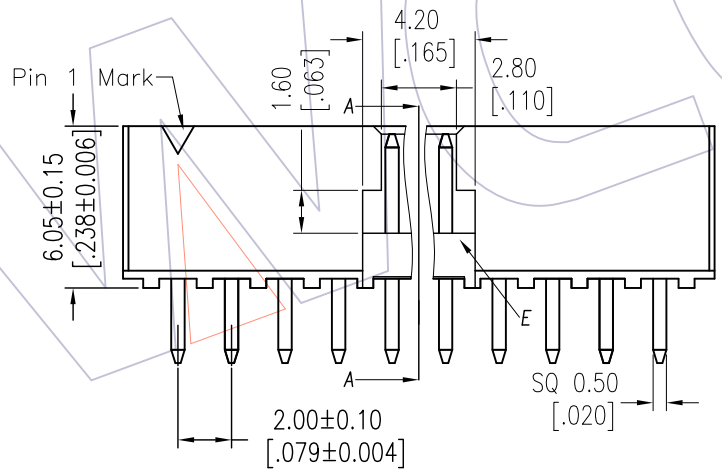

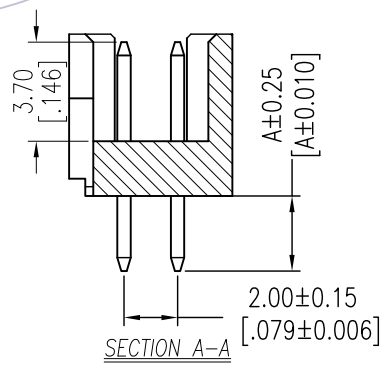

Item	Pitch	Mating	Dip(A)
Standard	2.00	5224	2.80
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2017/05/12	Modify drawing	⚠1
A0	2012/09/24	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	Ding	2017/05/12
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3122-XXSXXBK00XX

TITLE: 2.00 BOX HEADER 180°
H=6.10 "F" TYPE

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com