


PROPOSED PAD ARRANGEMENT:

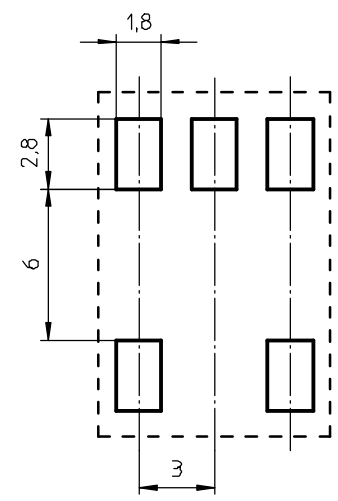

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.

Pin material: CuSn - Ni flash. Sn plated.

Max operating temp: acc. to IEC 85 class F, 155°C.

Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.

Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 4,56 mm².

Mean length of turn: 17,9 mm.



CLASSNO.		1 03-06-03	
CSHS-EP7-1S-5P-Z		4322 021 06351	
NAME: M.Veekens	SUPERS: 001	SP: 112 - 001	069
MPA	CHECK: E0-90-E003	Property of Elgeman van FERROXCUBE 2000	