

# Multilayer Ceramic Chip Capacitors

## General use

### C series

**Type:**            **C0603[EIA CC0201]**  
                      **C1005[EIA CC0402]**  
                      **C1608[EIA CC0603]**  
                      **C2012[EIA CC0805]**  
                      **C3216[EIA CC1206]**  
                      **C3225[EIA CC1210]**  
                      **C4532[EIA CC1812]**  
                      **C5750[EIA CC2220]**

**Issue date:**     April 2010

- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# REMINDERS

Please read this before using the product.

## SAFETY REMINDERS

### REMINDERS

1. If you intend to use a product listed in this catalog for a purpose that may cause loss of life or other damage, you must contact our company's sales window.
2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.
8. The descriptions in this catalog apply as of April 2010.

# General Multilayer Ceramic Chip Capacitors


## C Series C0603 (EIA CC0201) Type

Conformity to RoHS Directive

### FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

### SHAPES AND DIMENSIONS

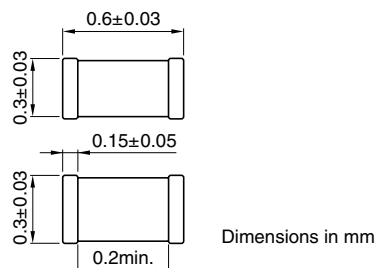

### PRODUCT IDENTIFICATION

| C   | 0603 | CH  | 1E  | 100 | D   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 0603 | 0.6×0.3mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | −25 to +85°C      |
| C0G                         | 0±30ppm/°C         | −55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | −25 to +85°C      |
| JF                          | +30, −80%          | −25 to +85°C      |
| X7R                         | ±15%               | −55 to +125°C     |
| X5R                         | ±15%               | −55 to +85°C      |
| Y5V                         | +22, −82%          | −30 to +85°C      |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

R designates a decimal point.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |
| 0R5 | 0.5pF   |

(6) Capacitance tolerance

| Symbol | Tolerance | Applicable capacitance range |
|--------|-----------|------------------------------|
| C      | ±0.25pF   | 10pF or less                 |
| D      | ±0.5pF    |                              |
| J      | ±5%       | Over 10pF                    |
| K      | ±10%      |                              |
| M      | ±20%      |                              |
| Z      | +80, −20% |                              |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 0.5                 | ±0.25pF   | 0.30±0.03           | C0603CH1E0R5C                               | C0603C0G1E0R5C                   |
| 0.75                | ±0.25pF   | 0.30±0.03           | C0603CH1ER75C                               | C0603C0G1ER75C                   |
| 1                   | ±0.25pF   | 0.30±0.03           | C0603CH1E010C                               | C0603C0G1E010C                   |
| 1.5                 | ±0.25pF   | 0.30±0.03           | C0603CH1E1R5C                               | C0603C0G1E1R5C                   |
| 2                   | ±0.25pF   | 0.30±0.03           | C0603CH1E020C                               | C0603C0G1E020C                   |
| 3                   | ±0.25pF   | 0.30±0.03           | C0603CH1E030C                               | C0603C0G1E030C                   |
| 4                   | ±0.25pF   | 0.30±0.03           | C0603CH1E040C                               | C0603C0G1E040C                   |
| 5                   | ±0.25pF   | 0.30±0.03           | C0603CH1E050C                               | C0603C0G1E050C                   |
| 6                   | ±0.5pF    | 0.30±0.03           | C0603CH1E060D                               | C0603C0G1E060D                   |
| 7                   | ±0.5pF    | 0.30±0.03           | C0603CH1E070D                               | C0603C0G1E070D                   |
| 8                   | ±0.5pF    | 0.30±0.03           | C0603CH1E080D                               | C0603C0G1E080D                   |
| 9                   | ±0.5pF    | 0.30±0.03           | C0603CH1E090D                               | C0603C0G1E090D                   |
| 10                  | ±0.5pF    | 0.30±0.03           | C0603CH1E100D                               | C0603C0G1E100D                   |
| 12                  | ±5%       | 0.30±0.03           | C0603CH1E120J                               | C0603C0G1E120J                   |
| 15                  | ±5%       | 0.30±0.03           | C0603CH1E150J                               | C0603C0G1E150J                   |
| 18                  | ±5%       | 0.30±0.03           | C0603CH1E180J                               | C0603C0G1E180J                   |
| 22                  | ±5%       | 0.30±0.03           | C0603CH1E220J                               | C0603C0G1E220J                   |
| 27                  | ±5%       | 0.30±0.03           | C0603CH1E270J                               | C0603C0G1E270J                   |
| 33                  | ±5%       | 0.30±0.03           | C0603CH1E330J                               | C0603C0G1E330J                   |
| 39                  | ±5%       | 0.30±0.03           | C0603CH1E390J                               | C0603C0G1E390J                   |
| 47                  | ±5%       | 0.30±0.03           | C0603CH1E470J                               | C0603C0G1E470J                   |
| 56                  | ±5%       | 0.30±0.03           | C0603CH1E560J                               | C0603C0G1E560J                   |
| 68                  | ±5%       | 0.30±0.03           | C0603CH1E680J                               | C0603C0G1E680J                   |
| 82                  | ±5%       | 0.30±0.03           | C0603CH1E820J                               | C0603C0G1E820J                   |
| 100                 | ±5%       | 0.30±0.03           | C0603CH1E101J                               | C0603C0G1E101J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 100                 | ±10%      | 0.30±0.03           | C0603JB1E101K                               | C0603X5R1E101K                   | C0603X7R1E101K                   |
| 150                 | ±10%      | 0.30±0.03           | C0603JB1E151K                               | C0603X5R1E151K                   | C0603X7R1E151K                   |
| 220                 | ±10%      | 0.30±0.03           | C0603JB1E221K                               | C0603X5R1E221K                   | C0603X7R1E221K                   |
| 330                 | ±10%      | 0.30±0.03           | C0603JB1E331K                               | C0603X5R1E331K                   | C0603X7R1E331K                   |
| 470                 | ±10%      | 0.30±0.03           | C0603JB1E471K                               | C0603X5R1E471K                   | C0603X7R1E471K                   |
| 680                 | ±10%      | 0.30±0.03           | C0603JB1E681K                               | C0603X5R1E681K                   | C0603X7R1E681K                   |
| 1,000               | ±10%      | 0.30±0.03           | C0603JB1E102K                               | C0603X5R1E102K                   | C0603X7R1E102K                   |
| 1,500               | ±10%      | 0.30±0.03           | C0603JB1E152K                               | C0603X5R1E152K                   | C0603X7R1E152K                   |
| 2,200               | ±10%      | 0.30±0.03           | C0603JB1E222K                               | C0603X5R1E222K                   | C0603X7R1E222K                   |
| 3,300               | ±10%      | 0.30±0.03           | C0603JB1E332K                               | C0603X5R1E332K                   | C0603X7R1E332K                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 4,700               | ±10%      | 0.30±0.03           | C0603JB1C472K                               | C0603X5R1C472K                   | C0603X7R1C472K                   |

**TEMPERATURE CHARACTERISTICS: JB(±10%), X5R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 10V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 6,800               | ±10%      | 0.30±0.03           | C0603JB1A682K                               | C0603X5R1A682K                   |
| 10,000              | ±10%      | 0.30±0.03           | C0603JB1A103K                               | C0603X5R1A103K                   |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 15,000              | ±10%      | 0.30±0.03           | C0603JB0J153K                   | C0603X5R0J153K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J153M                   | C0603X5R0J153M                   |
| 22,000              | ±10%      | 0.30±0.03           | C0603JB0J223K                   | C0603X5R0J223K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J223M                   | C0603X5R0J223M                   |
| 33,000              | ±10%      | 0.30±0.03           | C0603JB0J333K                   | C0603X5R0J333K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J333M                   | C0603X5R0J333M                   |
| 47,000              | ±10%      | 0.30±0.03           | C0603JB0J473K                   | C0603X5R0J473K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J473M                   | C0603X5R0J473M                   |
| 68,000              | ±10%      | 0.30±0.03           | C0603JB0J683K                   | C0603X5R0J683K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J683M                   | C0603X5R0J683M                   |
| 100,000             | ±10%      | 0.30±0.03           | C0603JB0J104K                   | C0603X5R0J104K                   |
|                     | ±20%      | 0.30±0.03           | C0603JB0J104M                   | C0603X5R0J104M                   |

**TEMPERATURE CHARACTERISTICS: JF(+30, –80%), Y5V(+22, –82%)**
**RATED VOLTAGE Edc: 16V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 10,000              | +80, –20% | 0.30±0.03           | C0603JF1C103Z                   | C0603Y5V1C103Z                   |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.


# C Series C1005(EIA CC0402) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS

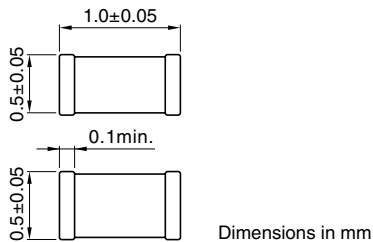

## PRODUCT IDENTIFICATION

| C   | 1005 | CH  | 1H  | 100 | D   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 1005 | 1.0×0.5mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | -25 to +85°C      |
| C0G                         | 0±30ppm/°C         | -55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | -25 to +85°C      |
| JF                          | +30, -80%          | -25 to +85°C      |
| X7R                         | ±15%               | -55 to +125°C     |
| X5R                         | ±15%               | -55 to +85°C      |
| Y5V                         | +22, -82%          | -30 to +85°C      |
| X6S                         | ±22%               | -55 to +105°C     |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0G | 4V   |
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |
| 1H | 50V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

R designates a decimal point.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |
| 0R5 | 0.5pF   |

(6) Capacitance tolerance

| Symbol | Tolerance | Applicable capacitance range |
|--------|-----------|------------------------------|
| C      | ±0.25pF   | 10pF or less                 |
| D      | ±0.5pF    |                              |
| J      | ±5%       | Over 10pF                    |
| K      | ±10%      |                              |
| M      | ±20%      |                              |
| Z      | +80, -20% |                              |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 0.5                 | ±0.25pF   | 0.5±0.05            | C1005CH1H0R5C                               | C1005C0G1H0R5C                   |
| 0.75                | ±0.25pF   | 0.5±0.05            | C1005CH1HR75C                               | C1005C0G1HR75C                   |
| 1                   | ±0.25pF   | 0.5±0.05            | C1005CH1H010C                               | C1005C0G1H010C                   |
| 1.5                 | ±0.25pF   | 0.5±0.05            | C1005CH1H1R5C                               | C1005C0G1H1R5C                   |
| 2                   | ±0.25pF   | 0.5±0.05            | C1005CH1H020C                               | C1005C0G1H020C                   |
| 3                   | ±0.25pF   | 0.5±0.05            | C1005CH1H030C                               | C1005C0G1H030C                   |
| 4                   | ±0.25pF   | 0.5±0.05            | C1005CH1H040C                               | C1005C0G1H040C                   |
| 5                   | ±0.25pF   | 0.5±0.05            | C1005CH1H050C                               | C1005C0G1H050C                   |
| 6                   | ±0.5pF    | 0.5±0.05            | C1005CH1H060D                               | C1005C0G1H060D                   |
| 7                   | ±0.5pF    | 0.5±0.05            | C1005CH1H070D                               | C1005C0G1H070D                   |
| 8                   | ±0.5pF    | 0.5±0.05            | C1005CH1H080D                               | C1005C0G1H080D                   |
| 9                   | ±0.5pF    | 0.5±0.05            | C1005CH1H090D                               | C1005C0G1H090D                   |
| 10                  | ±0.5pF    | 0.5±0.05            | C1005CH1H100D                               | C1005C0G1H100D                   |
| 12                  | ±5%       | 0.5±0.05            | C1005CH1H120J                               | C1005C0G1H120J                   |
| 15                  | ±5%       | 0.5±0.05            | C1005CH1H150J                               | C1005C0G1H150J                   |
| 18                  | ±5%       | 0.5±0.05            | C1005CH1H180J                               | C1005C0G1H180J                   |
| 22                  | ±5%       | 0.5±0.05            | C1005CH1H220J                               | C1005C0G1H220J                   |
| 27                  | ±5%       | 0.5±0.05            | C1005CH1H270J                               | C1005C0G1H270J                   |
| 33                  | ±5%       | 0.5±0.05            | C1005CH1H330J                               | C1005C0G1H330J                   |
| 39                  | ±5%       | 0.5±0.05            | C1005CH1H390J                               | C1005C0G1H390J                   |
| 47                  | ±5%       | 0.5±0.05            | C1005CH1H470J                               | C1005C0G1H470J                   |
| 56                  | ±5%       | 0.5±0.05            | C1005CH1H560J                               | C1005C0G1H560J                   |
| 68                  | ±5%       | 0.5±0.05            | C1005CH1H680J                               | C1005C0G1H680J                   |
| 82                  | ±5%       | 0.5±0.05            | C1005CH1H820J                               | C1005C0G1H820J                   |
| 100                 | ±5%       | 0.5±0.05            | C1005CH1H101J                               | C1005C0G1H101J                   |
| 120                 | ±5%       | 0.5±0.05            | C1005CH1H121J                               | C1005C0G1H121J                   |
| 150                 | ±5%       | 0.5±0.05            | C1005CH1H151J                               | C1005C0G1H151J                   |
| 180                 | ±5%       | 0.5±0.05            | C1005CH1H181J                               | C1005C0G1H181J                   |
| 220                 | ±5%       | 0.5±0.05            | C1005CH1H221J                               | C1005C0G1H221J                   |
| 270                 | ±5%       | 0.5±0.05            | C1005CH1H271J                               | C1005C0G1H271J                   |
| 330                 | ±5%       | 0.5±0.05            | C1005CH1H331J                               | C1005C0G1H331J                   |
| 390                 | ±5%       | 0.5±0.05            | C1005CH1H391J                               | C1005C0G1H391J                   |
| 470                 | ±5%       | 0.5±0.05            | C1005CH1H471J                               | C1005C0G1H471J                   |
| 560                 | ±5%       | 0.5±0.05            | C1005CH1H561J                               | C1005C0G1H561J                   |
| 680                 | ±5%       | 0.5±0.05            | C1005CH1H681J                               | C1005C0G1H681J                   |
| 820                 | ±5%       | 0.5±0.05            | C1005CH1H821J                               | C1005C0G1H821J                   |
| 1,000               | ±5%       | 0.5±0.05            | C1005CH1H102J                               | C1005C0G1H102J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 220                 | ±10%      | 0.5±0.05            | C1005JB1H221K                               | C1005X5R1H221K                   | C1005X7R1H221K                   |
| 330                 | ±10%      | 0.5±0.05            | C1005JB1H331K                               | C1005X5R1H331K                   | C1005X7R1H331K                   |
| 470                 | ±10%      | 0.5±0.05            | C1005JB1H471K                               | C1005X5R1H471K                   | C1005X7R1H471K                   |
| 680                 | ±10%      | 0.5±0.05            | C1005JB1H681K                               | C1005X5R1H681K                   | C1005X7R1H681K                   |
| 1,000               | ±10%      | 0.5±0.05            | C1005JB1H102K                               | C1005X5R1H102K                   | C1005X7R1H102K                   |
| 1,500               | ±10%      | 0.5±0.05            | C1005JB1H152K                               | C1005X5R1H152K                   | C1005X7R1H152K                   |
| 2,200               | ±10%      | 0.5±0.05            | C1005JB1H222K                               | C1005X5R1H222K                   | C1005X7R1H222K                   |
| 3,300               | ±10%      | 0.5±0.05            | C1005JB1H332K                               | C1005X5R1H332K                   | C1005X7R1H332K                   |
| 4,700               | ±10%      | 0.5±0.05            | C1005JB1H472K                               | C1005X5R1H472K                   | C1005X7R1H472K                   |
| 6,800               | ±10%      | 0.5±0.05            | C1005JB1H682K                               | C1005X5R1H682K                   | C1005X7R1H682K                   |

**RATED VOLTAGE Edc: 25V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
| 10,000              | ±10%      | 0.5±0.05            | C1005JB1E103K                   | C1005X5R1E103K                   | C1005X7R1E103K                   |
| 15,000              | ±10%      | 0.5±0.05            | C1005JB1E153K                   | C1005X5R1E153K                   | C1005X7R1E153K                   |
| 22,000              | ±10%      | 0.5±0.05            | C1005JB1E223K                   | C1005X5R1E223K                   | C1005X7R1E223K                   |
| 33,000              | ±10%      | 0.5±0.05            | C1005JB1E333K                   | C1005X5R1E333K                   | C1005X7R1E333K                   |
| 47,000              | ±10%      | 0.5±0.05            | C1005JB1E473K                   | C1005X5R1E473K                   | C1005X7R1E473K                   |

**RATED VOLTAGE Edc: 16V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
| 68,000              | ±10%      | 0.5±0.05            | C1005JB1C683K                   | C1005X5R1C683K                   | C1005X7R1C683K                   |
| 100,000             | ±10%      | 0.5±0.05            | C1005JB1C104K                   | C1005X5R1C104K                   | C1005X7R1C104K                   |

**TEMPERATURE CHARACTERISTICS: JB(±10%), X5R(±15%), X6S(±22%)****RATED VOLTAGE Edc: 16V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 150,000             | ±10%      | 0.5±0.05            | C1005JB1C154K                   | C1005X5R1C154K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB1C154M                   | C1005X5R1C154M                   |
| 220,000             | ±10%      | 0.5±0.05            | C1005JB1C224K                   | C1005X5R1C224K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB1C224M                   | C1005X5R1C224M                   |
| 470,000             | ±10%      | 0.5±0.05            | C1005JB1C474K                   | C1005X5R1C474K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB1C474M                   | C1005X5R1C474M                   |
| 1,000,000           | ±10%      | 0.5±0.05            | C1005JB1C105K                   | C1005X5R1C105K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB1C105M                   | C1005X5R1C105M                   |

**RATED VOLTAGE Edc: 10V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 330,000             | ±10%      | 0.5±0.05            | C1005JB1A334K                   | C1005X5R1A334K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB1A334M                   | C1005X5R1A334M                   | —                                |
| 470,000             | ±10%      | 0.5±0.05            | C1005JB1A474K                   | C1005X5R1A474K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB1A474M                   | C1005X5R1A474M                   | —                                |
| 680,000             | ±10%      | 0.5±0.05            | C1005JB1A684K                   | C1005X5R1A684K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB1A684M                   | C1005X5R1A684M                   | —                                |
| 1,000,000           | ±10%      | 0.5±0.05            | C1005JB1A105K                   | C1005X5R1A105K                   | C1005X6S1A105K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB1A105M                   | C1005X5R1A105M                   | C1005X6S1A105M                   |
| 2,200,000           | ±10%      | 0.5±0.05            | C1005JB1A225K                   | C1005X5R1A225K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB1A225M                   | C1005X5R1A225M                   | —                                |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 680,000             | ±10%      | 0.5±0.05            | C1005JB0J684K                   | C1005X5R0J684K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB0J684M                   | C1005X5R0J684M                   | —                                |
| 1,000,000           | ±10%      | 0.5±0.05            | C1005JB0J105K                   | C1005X5R0J105K                   | C1005X6S0J105K                   |
|                     | ±20%      | 0.5±0.05            | C1005JB0J105M                   | C1005X5R0J105M                   | C1005X6S0J105M                   |
| 1,500,000           | ±10%      | 0.5±0.05            | C1005JB0J155K                   | C1005X5R0J155K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB0J155M                   | C1005X5R0J155M                   | —                                |
| 2,200,000           | ±10%      | 0.5±0.05            | C1005JB0J225K                   | C1005X5R0J225K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1005JB0J225M                   | C1005X5R0J225M                   | —                                |
| 3,300,000           | ±20%      | 0.5±0.10            | C1005JB0J335M                   | C1005X5R0J335M                   | —                                |
| 4,700,000           | ±20%      | 0.5±0.15            | C1005JB0J475M                   | C1005X5R0J475M                   | —                                |

**RATED VOLTAGE Edc: 4V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 2,200,000           | ±10%      | 0.5±0.05            | —                               | —                                | C1005X6S0G225K                   |
|                     | ±20%      | 0.5±0.05            | —                               | —                                | C1005X6S0G225M                   |
| 3,300,000           | ±20%      | 0.5±0.10            | C1005JB0G335M                   | C1005X5R0G335M                   | —                                |
| 4,700,000           | ±20%      | 0.5±0.15            | C1005JB0G475M                   | C1005X5R0G475M                   | —                                |

**TEMPERATURE CHARACTERISTICS: JF(+30, –80%), Y5V(+22, –82%)**
**RATED VOLTAGE Edc: 25V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 100,000             | +80,–20%  | 0.5±0.05            | C1005JF1E104Z                   | C1005Y5V1E104Z                   |
| 220,000             | +80,–20%  | 0.5±0.05            | C1005JF1E224Z                   | C1005Y5V1E224Z                   |

**RATED VOLTAGE Edc: 10V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 470,000             | +80,–20%  | 0.5±0.05            | C1005JF1A474Z                   | C1005Y5V1A474Z                   |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 1,000,000           | +80,–20%  | 0.5±0.05            | C1005JF0J105Z                   | C1005Y5V0J105Z                   |

• For more information about the products or other capacitance or data, please contact us.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.


# C Series C1608 (EIA CC0603) Types

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 1608 | CH  | 1H  | 100 | D   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 1608 | 1.6×0.8mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | -25 to +85°C      |
| C0G                         | 0±30ppm/°C         | -55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | -25 to +85°C      |
| JF                          | +30, -80%          | -25 to +85°C      |
| X7R                         | ±15%               | -55 to +125°C     |
| X5R                         | ±15%               | -55 to +85°C      |
| Y5V                         | +22, -82%          | -30 to +85°C      |
| X6S                         | ±22%               | -55 to +105°C     |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0G | 4V   |
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |
| 1H | 50V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

R designates a decimal point.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |
| 0R5 | 0.5pF   |

(6) Capacitance tolerance

| Symbol | Tolerance | Applicable capacitance range |
|--------|-----------|------------------------------|
| C      | ±0.25pF   | 10pF or less                 |
| D      | ±0.5pF    |                              |
| J      | ±5%       | Over 10pF                    |
| K      | ±10%      |                              |
| M      | ±20%      |                              |
| Z      | +80, -20% |                              |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)**
**TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**
**RATED VOLTAGE E<sub>dc</sub>: 50V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 0.5                 | ±0.25pF   | 0.8±0.10            | C1608CH1H0R5C                               | C1608C0G1H0R5C                   |
| 0.75                | ±0.25pF   | 0.8±0.10            | C1608CH1HR75C                               | C1608C0G1HR75C                   |
| 1                   | ±0.25pF   | 0.8±0.10            | C1608CH1H010C                               | C1608C0G1H010C                   |
| 1.5                 | ±0.25pF   | 0.8±0.10            | C1608CH1H1R5C                               | C1608C0G1H1R5C                   |
| 2                   | ±0.25pF   | 0.8±0.10            | C1608CH1H020C                               | C1608C0G1H020C                   |
| 3                   | ±0.25pF   | 0.8±0.10            | C1608CH1H030C                               | C1608C0G1H030C                   |
| 4                   | ±0.25pF   | 0.8±0.10            | C1608CH1H040C                               | C1608C0G1H040C                   |
| 5                   | ±0.25pF   | 0.8±0.10            | C1608CH1H050C                               | C1608C0G1H050C                   |
| 6                   | ±0.5pF    | 0.8±0.10            | C1608CH1H060D                               | C1608C0G1H060D                   |
| 7                   | ±0.5pF    | 0.8±0.10            | C1608CH1H070D                               | C1608C0G1H070D                   |
| 8                   | ±0.5pF    | 0.8±0.10            | C1608CH1H080D                               | C1608C0G1H080D                   |
| 9                   | ±0.5pF    | 0.8±0.10            | C1608CH1H090D                               | C1608C0G1H090D                   |
| 10                  | ±0.5pF    | 0.8±0.10            | C1608CH1H100D                               | C1608C0G1H100D                   |
| 12                  | ±5%       | 0.8±0.10            | C1608CH1H120J                               | C1608C0G1H120J                   |
| 15                  | ±5%       | 0.8±0.10            | C1608CH1H150J                               | C1608C0G1H150J                   |
| 18                  | ±5%       | 0.8±0.10            | C1608CH1H180J                               | C1608C0G1H180J                   |
| 22                  | ±5%       | 0.8±0.10            | C1608CH1H220J                               | C1608C0G1H220J                   |
| 27                  | ±5%       | 0.8±0.10            | C1608CH1H270J                               | C1608C0G1H270J                   |
| 33                  | ±5%       | 0.8±0.10            | C1608CH1H330J                               | C1608C0G1H330J                   |
| 39                  | ±5%       | 0.8±0.10            | C1608CH1H390J                               | C1608C0G1H390J                   |
| 47                  | ±5%       | 0.8±0.10            | C1608CH1H470J                               | C1608C0G1H470J                   |
| 56                  | ±5%       | 0.8±0.10            | C1608CH1H560J                               | C1608C0G1H560J                   |
| 68                  | ±5%       | 0.8±0.10            | C1608CH1H680J                               | C1608C0G1H680J                   |
| 82                  | ±5%       | 0.8±0.10            | C1608CH1H820J                               | C1608C0G1H820J                   |
| 100                 | ±5%       | 0.8±0.10            | C1608CH1H101J                               | C1608C0G1H101J                   |
| 120                 | ±5%       | 0.8±0.10            | C1608CH1H121J                               | C1608C0G1H121J                   |
| 150                 | ±5%       | 0.8±0.10            | C1608CH1H151J                               | C1608C0G1H151J                   |
| 180                 | ±5%       | 0.8±0.10            | C1608CH1H181J                               | C1608C0G1H181J                   |
| 220                 | ±5%       | 0.8±0.10            | C1608CH1H221J                               | C1608C0G1H221J                   |
| 270                 | ±5%       | 0.8±0.10            | C1608CH1H271J                               | C1608C0G1H271J                   |
| 330                 | ±5%       | 0.8±0.10            | C1608CH1H331J                               | C1608C0G1H331J                   |
| 390                 | ±5%       | 0.8±0.10            | C1608CH1H391J                               | C1608C0G1H391J                   |
| 470                 | ±5%       | 0.8±0.10            | C1608CH1H471J                               | C1608C0G1H471J                   |
| 560                 | ±5%       | 0.8±0.10            | C1608CH1H561J                               | C1608C0G1H561J                   |
| 680                 | ±5%       | 0.8±0.10            | C1608CH1H681J                               | C1608C0G1H681J                   |
| 820                 | ±5%       | 0.8±0.10            | C1608CH1H821J                               | C1608C0G1H821J                   |
| 1,000               | ±5%       | 0.8±0.10            | C1608CH1H102J                               | C1608C0G1H102J                   |
| 1,500               | ±5%       | 0.8±0.10            | C1608CH1H152J                               | C1608C0G1H152J                   |
| 2,200               | ±5%       | 0.8±0.10            | C1608CH1H222J                               | C1608C0G1H222J                   |
| 3,300               | ±5%       | 0.8±0.10            | C1608CH1H332J                               | C1608C0G1H332J                   |
| 4,700               | ±5%       | 0.8±0.10            | C1608CH1H472J                               | C1608C0G1H472J                   |
| 6,800               | ±5%       | 0.8±0.10            | C1608CH1H682J                               | C1608C0G1H682J                   |
| 10,000              | ±5%       | 0.8±0.10            | C1608CH1H103J                               | C1608C0G1H103J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 10,000              | ±10%      | 0.8±0.10            | C1608JB1H103K                               | C1608X5R1H103K                   | C1608X7R1H103K                   |
| 15,000              | ±10%      | 0.8±0.10            | C1608JB1H153K                               | C1608X5R1H153K                   | C1608X7R1H153K                   |
| 22,000              | ±10%      | 0.8±0.10            | C1608JB1H223K                               | C1608X5R1H223K                   | C1608X7R1H223K                   |
| 33,000              | ±10%      | 0.8±0.10            | C1608JB1H333K                               | C1608X5R1H333K                   | C1608X7R1H333K                   |
| 47,000              | ±10%      | 0.8±0.10            | C1608JB1H473K                               | C1608X5R1H473K                   | C1608X7R1H473K                   |
| 68,000              | ±10%      | 0.8±0.10            | C1608JB1H683K                               | C1608X5R1H683K                   | C1608X7R1H683K                   |
| 100,000             | ±10%      | 0.8±0.10            | C1608JB1H104K                               | C1608X5R1H104K                   | C1608X7R1H104K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1H104M                               | C1608X5R1H104M                   | C1608X7R1H104M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 150,000             | ±10%      | 0.8±0.10            | C1608JB1E154K                               | C1608X5R1E154K                   | C1608X7R1E154K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1E154M                               | C1608X5R1E154M                   | C1608X7R1E154M                   |
| 220,000             | ±10%      | 0.8±0.10            | C1608JB1E224K                               | C1608X5R1E224K                   | C1608X7R1E224K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1E224M                               | C1608X5R1E224M                   | C1608X7R1E224M                   |
| 330,000             | ±10%      | 0.8±0.10            | C1608JB1E334K                               | C1608X5R1E334K                   | C1608X7R1E334K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1E334M                               | C1608X5R1E334M                   | C1608X7R1E334M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 470,000             | ±10%      | 0.8+0.15, -0.1      | C1608JB1C474K                               | C1608X5R1C474K                   | C1608X7R1C474K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1C474M                               | C1608X5R1C474M                   | C1608X7R1C474M                   |
| 680,000             | ±10%      | 0.8+0.15, -0.1      | C1608JB1C684K                               | C1608X5R1C684K                   | C1608X7R1C684K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1C684M                               | C1608X5R1C684M                   | C1608X7R1C684M                   |
| 1,000,000           | ±10%      | 0.8+0.15, -0.1      | C1608JB1C105K                               | C1608X5R1C105K                   | C1608X7R1C105K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1C105M                               | C1608X5R1C105M                   | C1608X7R1C105M                   |

**TEMPERATURE CHARACTERISTICS: JB(±10%), X5R(±15%), X6S(±22%)**RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 470,000             | ±10%      | 0.8+0.15, -0.1      | C1608JB1E474K                               | C1608X5R1E474K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1E474M                               | C1608X5R1E474M                   |
| 680,000             | ±10%      | 0.8+0.15, -0.1      | C1608JB1E684K                               | C1608X5R1E684K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1E684M                               | C1608X5R1E684M                   |
| 1,000,000           | ±10%      | 0.8+0.15, -0.1      | C1608JB1E105K                               | C1608X5R1E105K                   |
|                     | ±20%      | 0.8+0.15, -0.1      | C1608JB1E105M                               | C1608X5R1E105M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 2,200,000           | ±10%      | 0.5±0.05            | C1608JB1C225K                               | C1608X5R1C225K                   |
|                     | ±20%      | 0.5±0.05            | C1608JB1C225M                               | C1608X5R1C225M                   |
| 4,700,000           | ±10%      | 0.8±0.10            | C1608JB1C475K                               | C1608X5R1C475K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1C475M                               | C1608X5R1C475M                   |

RATED VOLTAGE E<sub>dc</sub>: 10V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | 品名<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
|---------------------|-----------|---------------------|---------------------------------------|----------------------------------|----------------------------------|
| 2,200,000           | ±10%      | 0.5±0.05            | C1608JB1A225K                         | C1608X5R1A225K                   | C1608X6S1A225K                   |
|                     | ±20%      | 0.5±0.05            | C1608JB1A225M                         | C1608X5R1A225M                   | C1608X6S1A225M                   |
| 4,700,000           | ±10%      | 0.5±0.05            | C1608JB1A475K                         | C1608X5R1A475K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1608JB1A475M                         | C1608X5R1A475M                   | —                                |
|                     | ±10%      | 0.8±0.10            | C1608JB1A475K                         | C1608X5R1A475K                   | C1608X6S1A475K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB1A475M                         | C1608X5R1A475M                   | C1608X6S1A475M                   |
| 10,000,000          | ±10%      | 0.8±0.10            | C1608JB1A106K                         | C1608X5R1A106K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB1A106M                         | C1608X5R1A106M                   | —                                |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 1,500,000           | ±10%      | 0.8±0.10            | C1608JB0J155K                   | C1608X5R0J155K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB0J155M                   | C1608X5R0J155M                   | —                                |
| 2,200,000           | ±10%      | 0.5±0.05            | —                               | —                                | C1608X6S0J225K                   |
|                     | ±20%      | 0.5±0.05            | —                               | —                                | C1608X6S0J225M                   |
|                     | ±10%      | 0.8±0.10            | C1608JB0J225K                   | C1608X5R0J225K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB0J225M                   | C1608X5R0J225M                   | —                                |
| 3,300,000           | ±10%      | 0.8±0.10            | C1608JB0J335K                   | C1608X5R0J335K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB0J335M                   | C1608X5R0J335M                   | —                                |
| 4,700,000           | ±10%      | 0.5±0.05            | C1608JB0J475K                   | C1608X5R0J475K                   | —                                |
|                     | ±20%      | 0.5±0.05            | C1608JB0J475M                   | C1608X5R0J475M                   | —                                |
|                     | ±10%      | 0.8±0.10            | C1608JB0J475K                   | C1608X5R0J475K                   | C1608X6S0J475K                   |
|                     | ±20%      | 0.8±0.10            | C1608JB0J475M                   | C1608X5R0J475M                   | C1608X6S0J475M                   |
| 6,800,000           | ±10%      | 0.8±0.10            | C1608JB0J685K                   | C1608X5R0J685K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB0J685M                   | C1608X5R0J685M                   | —                                |
| 10,000,000          | ±10%      | 0.8±0.10            | C1608JB0J106K                   | C1608X5R0J106K                   | —                                |
|                     | ±20%      | 0.8±0.10            | C1608JB0J106M                   | C1608X5R0J106M                   | —                                |

**RATED VOLTAGE Edc: 4V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | 品名                              |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 4,700,000           | ±10%      | 0.5±0.05            | —                               | —                                | C1608X6S0G475K                   |
|                     | ±20%      | 0.5±0.05            | —                               | —                                | C1608X6S0G475M                   |
| 10,000,000          | ±10%      | 0.8±0.10            | —                               | —                                | C1608X6S0G106K                   |
|                     | ±20%      | 0.8±0.10            | —                               | —                                | C1608X6S0G106M                   |

**TEMPERATURE CHARACTERISTICS: JF(+30, -80%), Y5V(+22, -82%)**
**RATED VOLTAGE Edc: 50V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 100,000             | +80,-20%  | 0.8±0.10            | C1608JF1H104Z                   | C1608Y5V1H104Z                   |
| 220,000             | +80,-20%  | 0.8±0.10            | C1608JF1H224Z                   | C1608Y5V1H224Z                   |
| 470,000             | +80,-20%  | 0.8±0.10            | C1608JF1H474Z                   | C1608Y5V1H474Z                   |

**RATED VOLTAGE Edc: 25V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 1,000,000           | +80,-20%  | 0.8±0.10            | C1608JF1E105Z                   | C1608Y5V1E105Z                   |

**RATED VOLTAGE Edc: 16V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 2,200,000           | +80,-20%  | 0.8±0.10            | C1608JF1C225Z                   | C1608Y5V1C225Z                   |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JF | Temperature characteristics: Y5V |
| 4,700,000           | +80,-20%  | 0.8±0.10            | C1608JF0J475Z                   | C1608Y5V0J475Z                   |
| 10,000,000          | +80,-20%  | 0.8±0.15,-0.10      | C1608JF0J106Z                   | C1608Y5V0J106Z                   |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.


# C Series C2012 (EIA CC0805) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 2012 | CH  | 1H  | 103 | J   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |            |
|------|------------|
| 2012 | 2.0×1.25mm |
|------|------------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | -25 to +85°C      |
| C0G                         | 0±30ppm/°C         | -55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | -25 to +85°C      |
| JF                          | +30, -80%          | -25 to +85°C      |
| X7R                         | ±15%               | -55 to +125°C     |
| X5R                         | ±15%               | -55 to +85°C      |
| Y5V                         | +22, -82%          | -30 to +85°C      |
| X6S                         | ±22%               | -55 to +105°C     |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0G | 4V   |
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |
| 1H | 50V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |

(6) Capacitance tolerance

|   |           |
|---|-----------|
| J | ±5%       |
| K | ±10%      |
| M | ±20%      |
| Z | +80, -20% |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 680                 | ±5%       | 0.60±0.10           | C2012CH1H681J                               | C2012C0G1H681J                   |
| 820                 | ±5%       | 0.60±0.10           | C2012CH1H821J                               | C2012C0G1H821J                   |
| 1,000               | ±5%       | 0.60±0.10           | C2012CH1H102J                               | C2012C0G1H102J                   |
| 1,500               | ±5%       | 0.60±0.10           | C2012CH1H152J                               | C2012C0G1H152J                   |
| 2,200               | ±5%       | 0.60±0.10           | C2012CH1H222J                               | C2012C0G1H222J                   |
| 3,300               | ±5%       | 0.60±0.10           | C2012CH1H332J                               | C2012C0G1H332J                   |
| 4,700               | ±5%       | 0.60±0.10           | C2012CH1H472J                               | C2012C0G1H472J                   |
| 6,800               | ±5%       | 0.60±0.10           | C2012CH1H682J                               | C2012C0G1H682J                   |
| 10,000              | ±5%       | 0.60±0.10           | C2012CH1H103J                               | C2012C0G1H103J                   |
| 15,000              | ±5%       | 0.85±0.10           | C2012CH1H153J                               | C2012C0G1H153J                   |
| 22,000              | ±5%       | 1.25±0.10           | C2012CH1H223J                               | C2012C0G1H223J                   |
| 33,000              | ±5%       | 1.25±0.10           | C2012CH1H333J                               | C2012C0G1H333J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 150,000             | ±10%      | 1.25±0.10           | C2012JB1H154K                               | C2012X5R1H154K                   | C2012X7R1H154K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1H154M                               | C2012X5R1H154M                   | C2012X7R1H154M                   |
| 220,000             | ±10%      | 1.25±0.10           | C2012JB1H224K                               | C2012X5R1H224K                   | C2012X7R1H224K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1H224M                               | C2012X5R1H224M                   | C2012X7R1H224M                   |
| 330,000             | ±10%      | 1.25±0.10           | C2012JB1H334K                               | C2012X5R1H334K                   | C2012X7R1H334K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1H334M                               | C2012X5R1H334M                   | C2012X7R1H334M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 470,000             | ±10%      | 1.25±0.10           | C2012JB1E474K                               | C2012X5R1E474K                   | C2012X7R1E474K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1E474M                               | C2012X5R1E474M                   | C2012X7R1E474M                   |
| 680,000             | ±10%      | 1.25±0.10           | C2012JB1E684K                               | C2012X5R1E684K                   | C2012X7R1E684K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1E684M                               | C2012X5R1E684M                   | C2012X7R1E684M                   |
| 1,000,000           | ±10%      | 1.25±0.10           | C2012JB1E105K                               | C2012X5R1E105K                   | C2012X7R1E105K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1E105M                               | C2012X5R1E105M                   | C2012X7R1E105M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 330,000             | ±10%      | 0.85±0.10           | C2012JB1C334K                               | C2012X5R1C334K                   | C2012X7R1C334K                   |
|                     | ±20%      | 0.85±0.10           | C2012JB1C334M                               | C2012X5R1C334M                   | C2012X7R1C334M                   |
| 1,500,000           | ±10%      | 1.25±0.10           | C2012JB1C155K                               | C2012X5R1C155K                   | C2012X7R1C155K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1C155M                               | C2012X5R1C155M                   | C2012X7R1C155M                   |
| 2,200,000           | ±10%      | 1.25±0.10           | C2012JB1C225K                               | C2012X5R1C225K                   | C2012X7R1C225K                   |
|                     | ±20%      | 1.25±0.10           | C2012JB1C225M                               | C2012X5R1C225M                   | C2012X7R1C225M                   |

**TEMPERATURE CHARACTERISTICS: JB( $\pm 10\%$ ), X5R( $\pm 15\%$ ), X6S( $\pm 22\%$ )**
**RATED VOLTAGE E<sub>dc</sub>: 50V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|------------|---------------------|---------------------------------------------|----------------------------------|
| 150,000             | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C2012JB1H154K                               | C2012X5R1H154K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C2012JB1H154M                               | C2012X5R1H154M                   |
| 220,000             | $\pm 10\%$ | 0.85+0.15, -0.10    | C2012JB1H224K                               | C2012X5R1H224K                   |
|                     | $\pm 20\%$ | 0.85+0.15, -0.10    | C2012JB1H224M                               | C2012X5R1H224M                   |

**RATED VOLTAGE E<sub>dc</sub>: 25V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|------------|---------------------|---------------------------------------------|----------------------------------|
| 150,000             | $\pm 10\%$ | 0.6 $\pm$ 0.10      | C2012JB1E154K                               | C2012X5R1E154K                   |
|                     | $\pm 20\%$ | 0.6 $\pm$ 0.10      | C2012JB1E154M                               | C2012X5R1E154M                   |
| 220,000             | $\pm 10\%$ | 0.6 $\pm$ 0.10      | C2012JB1E224K                               | C2012X5R1E224K                   |
|                     | $\pm 20\%$ | 0.6 $\pm$ 0.10      | C2012JB1E224M                               | C2012X5R1E224M                   |
| 330,000             | $\pm 10\%$ | 0.8+0.15, -0.10     | C2012JB1E334K                               | C2012X5R1E334K                   |
|                     | $\pm 20\%$ | 0.8+0.15, -0.10     | C2012JB1E334M                               | C2012X5R1E334M                   |
| 470,000             | $\pm 10\%$ | 0.8+0.15, -0.10     | C2012JB1E474K                               | C2012X5R1E474K                   |
|                     | $\pm 20\%$ | 0.8+0.15, -0.10     | C2012JB1E474M                               | C2012X5R1E474M                   |
| 1,000,000           | $\pm 10\%$ | 1.25 $\pm$ 0.10     | C2012JB1E105K                               | C2012X5R1E105K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.10     | C2012JB1E105M                               | C2012X5R1E105M                   |
| 1,500,000           | $\pm 10\%$ | 1.25 $\pm$ 0.10     | C2012JB1E155K                               | C2012X5R1E155K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.10     | C2012JB1E155M                               | C2012X5R1E155M                   |
| 2,200,000           | $\pm 10\%$ | 1.25 $\pm$ 0.10     | C2012JB1E225K                               | C2012X5R1E225K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.10     | C2012JB1E225M                               | C2012X5R1E225M                   |

**RATED VOLTAGE E<sub>dc</sub>: 16V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|------------|---------------------|---------------------------------------------|----------------------------------|
| 330,000             | $\pm 10\%$ | 0.6 $\pm$ 0.10      | C2012JB1C334K                               | C2012X5R1C334K                   |
|                     | $\pm 20\%$ | 0.6 $\pm$ 0.10      | C2012JB1C334M                               | C2012X5R1C334M                   |
| 470,000             | $\pm 10\%$ | 0.6 $\pm$ 0.10      | C2012JB1C474K                               | C2012X5R1C474K                   |
|                     | $\pm 20\%$ | 0.6 $\pm$ 0.10      | C2012JB1C474M                               | C2012X5R1C474M                   |
| 680,000             | $\pm 10\%$ | 0.8+0.15, -0.10     | C2012JB1C684K                               | C2012X5R1C684K                   |
|                     | $\pm 20\%$ | 0.8+0.15, -0.10     | C2012JB1C684M                               | C2012X5R1C684M                   |
| 1,000,000           | $\pm 10\%$ | 0.8+0.15, -0.10     | C2012JB1C105K                               | C2012X5R1C105K                   |
|                     | $\pm 20\%$ | 0.8+0.15, -0.10     | C2012JB1C105M                               | C2012X5R1C105M                   |
| 3,300,000           | $\pm 10\%$ | 1.25 $\pm$ 0.20     | C2012JB1C335K                               | C2012X5R1C335K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.20     | C2012JB1C335M                               | C2012X5R1C335M                   |
| 4,700,000           | $\pm 10\%$ | 1.25 $\pm$ 0.20     | C2012JB1C475K                               | C2012X5R1C475K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.20     | C2012JB1C475M                               | C2012X5R1C475M                   |
| 6,800,000           | $\pm 10\%$ | 1.25 $\pm$ 0.10     | C2012JB1C685K                               | C2012X5R1C685K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.10     | C2012JB1C685M                               | C2012X5R1C685M                   |
| 10,000,000          | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C2012JB1C106K                               | C2012X5R1C106K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C2012JB1C106M                               | C2012X5R1C106M                   |
|                     | $\pm 10\%$ | 1.25 $\pm$ 0.10     | C2012JB1C106K                               | C2012X5R1C106K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.10     | C2012JB1C106M                               | C2012X5R1C106M                   |
| 22,000,000          | $\pm 10\%$ | 1.25 $\pm$ 0.20     | C2012JB1C226K                               | C2012X5R1C226K                   |
|                     | $\pm 20\%$ | 1.25 $\pm$ 0.20     | C2012JB1C226M                               | C2012X5R1C226M                   |

**RATED VOLTAGE Edc: 10V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 680,000             | ±10%      | 0.6±0.10            | C2012JB1A684K                   | C2012X5R1A684K                   | —                                |
|                     | ±20%      | 0.6±0.10            | C2012JB1A684M                   | C2012X5R1A684M                   | —                                |
| 1,000,000           | ±10%      | 0.85±0.10           | C2012JB1A105K                   | C2012X5R1A105K                   | —                                |
|                     | ±20%      | 0.85±0.10           | C2012JB1A105M                   | C2012X5R1A105M                   | —                                |
| 1,500,000           | ±10%      | 0.85±0.10           | C2012JB1A155K                   | C2012X5R1A155K                   | —                                |
|                     | ±20%      | 0.85±0.10           | C2012JB1A155M                   | C2012X5R1A155M                   | —                                |
| 2,200,000           | ±10%      | 0.8+0.15, -0.10     | C2012JB1A225K                   | C2012X5R1A225K                   | —                                |
|                     | ±20%      | 0.8+0.15, -0.10     | C2012JB1A225M                   | C2012X5R1A225M                   | —                                |
| 3,300,000           | ±10%      | 1.25±0.10           | C2012JB1A335K                   | C2012X5R1A335K                   | —                                |
|                     | ±20%      | 1.25±0.10           | C2012JB1A335M                   | C2012X5R1A335M                   | —                                |
| 4,700,000           | ±10%      | 1.25±0.10           | C2012JB1A475K                   | C2012X5R1A475K                   | —                                |
|                     | ±20%      | 1.25±0.10           | C2012JB1A475M                   | C2012X5R1A475M                   | —                                |
| 6,800,000           | ±10%      | 1.25±0.10           | C2012JB1A685K                   | C2012X5R1A685K                   | —                                |
|                     | ±20%      | 1.25±0.10           | C2012JB1A685M                   | C2012X5R1A685M                   | —                                |
| 10,000,000          | ±10%      | 0.85±0.10           | C2012JB1A106K                   | C2012X5R1A106K                   | C2012X6S1A106K                   |
|                     | ±20%      | 0.85±0.10           | C2012JB1A106M                   | C2012X5R1A106M                   | C2012X6S1A106M                   |
|                     | ±10%      | 1.25±0.10           | C2012JB1A106K                   | C2012X5R1A106K                   | —                                |
|                     | ±20%      | 1.25±0.10           | C2012JB1A106M                   | C2012X5R1A106M                   | —                                |
| 15,000,000          | ±10%      | 1.25±0.10           | C2012JB1A156K                   | C2012X5R1A156K                   | —                                |
|                     | ±20%      | 1.25±0.10           | C2012JB1A156M                   | C2012X5R1A156M                   | —                                |
| 22,000,000          | ±20%      | 0.85±0.10           | C2012JB1A226M                   | C2012X5R1A226M                   | —                                |
|                     | ±10%      | 1.25±0.20           | C2012JB1A226K                   | C2012X5R1A226K                   | C2012X6S1A226K                   |
|                     | ±20%      | 1.25±0.20           | C2012JB1A226M                   | C2012X5R1A226M                   | C2012X6S1A226M                   |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 1,000,000           | ±10%      | 0.6±0.10            | C2012JB0J105K                   | C2012X5R0J105K                   | —                                |
|                     | ±20%      | 0.6±0.10            | C2012JB0J105M                   | C2012X5R0J105M                   | —                                |
| 3,300,000           | ±10%      | 0.85+0.15, -0.10    | C2012JB0J335K                   | C2012X5R0J335K                   | —                                |
|                     | ±20%      | 0.85+0.15, -0.10    | C2012JB0J335M                   | C2012X5R0J335M                   | —                                |
| 4,700,000           | ±10%      | 0.85+0.15, -0.10    | C2012JB0J475K                   | C2012X5R0J475K                   | —                                |
|                     | ±20%      | 0.85+0.15, -0.10    | C2012JB0J475M                   | C2012X5R0J475M                   | —                                |
| 6,800,000           | ±10%      | 1.25±0.20           | C2012JB0J685K                   | C2012X5R0J685K                   | —                                |
|                     | ±20%      | 1.25±0.20           | C2012JB0J685M                   | C2012X5R0J685M                   | —                                |
| 10,000,000          | ±10%      | 0.85±0.10           | —                               | —                                | C2012X6S0J106K                   |
|                     | ±20%      | 0.85±0.10           | —                               | —                                | C2012X6S0J106M                   |
|                     | ±10%      | 1.25±0.20           | C2012JB0J106K                   | C2012X5R0J106K                   | —                                |
|                     | ±20%      | 1.25±0.20           | C2012JB0J106M                   | C2012X5R0J106M                   | —                                |
| 15,000,000          | ±20%      | 1.25±0.20           | C2012JB0J156M                   | C2012X5R0J156M                   | —                                |
|                     | ±20%      | 0.85±0.10           | C2012JB0J226M                   | C2012X5R0J226M                   | —                                |
| 22,000,000          | ±10%      | 1.25±0.20           | C2012JB0J226K                   | C2012X5R0J226K                   | C2012X6S0J226K                   |
|                     | ±20%      | 1.25±0.20           | C2012JB0J226M                   | C2012X5R0J226M                   | C2012X6S0J226M                   |

**RATED VOLTAGE Edc: 4V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.                        |                                  |                                  |
|---------------------|-----------|---------------------|---------------------------------|----------------------------------|----------------------------------|
|                     |           |                     | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X6S |
| 22,000,000          | ±20%      | 0.85±0.10           | —                               | —                                | C2012X6S0G226M                   |

**TEMPERATURE CHARACTERISTICS: X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 680,000             | ±10%      | 1.25±0.10           | C2012X5R1E684K                               | C2012X7R1E684K                   |
|                     | ±20%      | 1.25±0.10           | C2012X5R1E684M                               | C2012X7R1E684M                   |
| 1,000,000           | ±10%      | 1.25±0.10           | C2012X5R1E105K                               | C2012X7R1E105K                   |
|                     | ±20%      | 1.25±0.10           | C2012X5R1E105M                               | C2012X7R1E105M                   |
| 1,500,000           | ±10%      | 1.25±0.20           | C2012X5R1E155K                               | C2012X7R1E155K                   |
|                     | ±20%      | 1.25±0.20           | C2012X5R1E155M                               | C2012X7R1E155M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 1,000,000           | ±10%      | 0.85±0.10           | C2012X5R1C105K                               | C2012X7R1C105K                   |
|                     | ±20%      | 0.85±0.10           | C2012X5R1C105M                               | C2012X7R1C105M                   |
| 1,500,000           | ±10%      | 1.25±0.10           | C2012X5R1C155K                               | C2012X7R1C155K                   |
|                     | ±20%      | 1.25±0.10           | C2012X5R1C155M                               | C2012X7R1C155M                   |
| 2,200,000           | ±10%      | 1.25±0.20           | C2012X5R1C225K                               | C2012X7R1C225K                   |
|                     | ±20%      | 1.25±0.20           | C2012X5R1C225M                               | C2012X7R1C225M                   |

**TEMPERATURE CHARACTERISTICS: X5R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R |
|---------------------|-----------|---------------------|----------------------------------------------|
| 4,700,000           | ±10%      | 0.85±0.10           | C2012X5R0J475K                               |
|                     | ±20%      | 0.85±0.10           | C2012X5R0J475M                               |
| 15,000,000          | ±20%      | 0.85+0.15,-0.10     | C2012X5R0J156M                               |

**TEMPERATURE CHARACTERISTICS: JF(+30, -80%), Y5V(+22, -82%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 1,000,000           | +80,-20%  | 0.85±0.10           | C2012JF1H105Z                               | C2012Y5V1H105Z                   |
| 2,200,000           | +80,-20%  | 1.25±0.20           | C2012JF1H225Z                               | C2012Y5V1H225Z                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 4,700,000           | +80,-20%  | 1.25±0.20           | C2012JF1E475Z                               | C2012Y5V1E475Z                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 10,000,000          | +80,-20%  | 1.25±0.20           | C2012JF1C106Z                               | C2012Y5V1C106Z                   |

RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 22,000,000          | +80,-20%  | 1.25±0.20           | C2012JF0J226Z                               | C2012Y5V0J226Z                   |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.


# C Series C3216 (EIA CC1206) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 3216 | CH  | 1H  | 103 | J   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 3216 | 3.2×1.6mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | –25 to +85°C      |
| C0G                         | 0±30ppm/°C         | –55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | –25 to +85°C      |
| JF                          | +30, –80%          | –25 to +85°C      |
| X7R                         | ±15%               | –55 to +125°C     |
| X5R                         | ±15%               | –55 to +85°C      |
| Y5V                         | +22, –82%          | –30 to +85°C      |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |
| 1H | 50V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |

(6) Capacitance tolerance

|   |           |
|---|-----------|
| J | ±5%       |
| K | ±10%      |
| M | ±20%      |
| Z | +80, –20% |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance (pF) | Tolerance | Thickness T (mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|
| 4,700            | ±5%       | 0.60±0.10        | C3216CH1H472J                               | C3216C0G1H472J                   |
| 6,800            | ±5%       | 0.60±0.10        | C3216CH1H682J                               | C3216C0G1H682J                   |
| 10,000           | ±5%       | 0.60±0.10        | C3216CH1H103J                               | C3216C0G1H103J                   |
| 15,000           | ±5%       | 0.60±0.10        | C3216CH1H153J                               | C3216C0G1H153J                   |
| 22,000           | ±5%       | 0.60±0.10        | C3216CH1H223J                               | C3216C0G1H223J                   |
| 33,000           | ±5%       | 0.85±0.10        | C3216CH1H333J                               | C3216C0G1H333J                   |
| 47,000           | ±5%       | 1.15±0.10        | C3216CH1H473J                               | C3216C0G1H473J                   |
| 56,000           | ±5%       | 1.15±0.10        | C3216CH1H563J                               | C3216C0G1H563J                   |
| 68,000           | ±5%       | 1.60±0.20        | C3216CH1H683J                               | C3216C0G1H683J                   |
| 100,000          | ±5%       | 1.60±0.20        | C3216CH1H104J                               | C3216C0G1H104J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance (pF) | Tolerance | Thickness T (mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 470,000          | ±10%      | 1.6±0.15         | C3216JB1H474K                               | C3216X5R1H474K                   | C3216X7R1H474K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1H474M                               | C3216X5R1H474M                   | C3216X7R1H474M                   |
| 680,000          | ±10%      | 1.6±0.15         | C3216JB1H684K                               | C3216X5R1H684K                   | C3216X7R1H684K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1H684M                               | C3216X5R1H684M                   | C3216X7R1H684M                   |
| 1,000,000        | ±10%      | 1.6±0.15         | C3216JB1H105K                               | C3216X5R1H105K                   | C3216X7R1H105K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1H105M                               | C3216X5R1H105M                   | C3216X7R1H105M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance (pF) | Tolerance | Thickness T (mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 1,500,000        | ±10%      | 1.6±0.15         | C3216JB1E155K                               | C3216X5R1E155K                   | C3216X7R1E155K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1E155M                               | C3216X5R1E155M                   | C3216X7R1E155M                   |
| 2,200,000        | ±10%      | 1.6±0.15         | C3216JB1E225K                               | C3216X5R1E225K                   | C3216X7R1E225K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1E225M                               | C3216X5R1E225M                   | C3216X7R1E225M                   |
| 3,300,000        | ±10%      | 1.6±0.15         | C3216JB1E335K                               | C3216X5R1E335K                   | C3216X7R1E335K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1E335M                               | C3216X5R1E335M                   | C3216X7R1E335M                   |
| 4,700,000        | ±10%      | 1.6±0.15         | C3216JB1E475K                               | C3216X5R1E475K                   | C3216X7R1E475K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1E475M                               | C3216X5R1E475M                   | C3216X7R1E475M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance (pF) | Tolerance | Thickness T (mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|------------------|-----------|------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 2,200,000        | ±10%      | 1.15±0.15        | C3216JB1C225K                               | C3216X5R1C225K                   | C3216X7R1C225K                   |
|                  | ±20%      | 1.15±0.15        | C3216JB1C225M                               | C3216X5R1C225M                   | C3216X7R1C225M                   |
| 3,300,000        | ±10%      | 0.85±0.15        | C3216JB1C335K                               | C3216X5R1C335K                   | C3216X7R1C335K                   |
|                  | ±20%      | 0.85±0.15        | C3216JB1C335M                               | C3216X5R1C335M                   | C3216X7R1C335M                   |
| 4,700,000        | ±10%      | 1.15±0.15        | C3216JB1C475K                               | C3216X5R1C475K                   | C3216X7R1C475K                   |
|                  | ±20%      | 1.15±0.15        | C3216JB1C475M                               | C3216X5R1C475M                   | C3216X7R1C475M                   |
| 6,800,000        | ±10%      | 1.6±0.15         | C3216JB1C685K                               | C3216X5R1C685K                   | C3216X7R1C685K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1C685M                               | C3216X5R1C685M                   | C3216X7R1C685M                   |
| 10,000,000       | ±10%      | 1.6±0.15         | C3216JB1C106K                               | C3216X5R1C106K                   | C3216X7R1C106K                   |
|                  | ±20%      | 1.6±0.15         | C3216JB1C106M                               | C3216X5R1C106M                   | C3216X7R1C106M                   |

**TEMPERATURE CHARACTERISTICS: JB( $\pm 10\%$ ), X5R( $\pm 15\%$ )****RATED VOLTAGE E<sub>dc</sub>: 50V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|------------|---------------------|---------------------------------|----------------------------------|
|                     |            |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 470,000             | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C3216JB1H474K                   | C3216X5R1H474K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C3216JB1H474M                   | C3216X5R1H474M                   |

**RATED VOLTAGE E<sub>dc</sub>: 25V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|------------|---------------------|---------------------------------|----------------------------------|
|                     |            |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 1,000,000           | $\pm 10\%$ | 0.85+0.15, -0.10    | C3216JB1E105K                   | C3216X5R1E105K                   |
|                     | $\pm 20\%$ | 0.85+0.15, -0.10    | C3216JB1E105M                   | C3216X5R1E105M                   |
| 1,500,000           | $\pm 10\%$ | 0.85+0.15, -0.10    | C3216JB1E155K                   | C3216X5R1E155K                   |
|                     | $\pm 20\%$ | 0.85+0.15, -0.10    | C3216JB1E155M                   | C3216X5R1E155M                   |
| 3,300,000           | $\pm 10\%$ | 0.85+0.15, -0.10    | C3216JB1E335K                   | C3216X5R1E335K                   |
|                     | $\pm 20\%$ | 0.85+0.15, -0.10    | C3216JB1E335M                   | C3216X5R1E335M                   |

**RATED VOLTAGE E<sub>dc</sub>: 16V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|------------|---------------------|---------------------------------|----------------------------------|
|                     |            |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 1,000,000           | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C3216JB1C105K                   | C3216X5R1C105K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C3216JB1C105M                   | C3216X5R1C105M                   |
| 1,500,000           | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C3216JB1C155K                   | C3216X5R1C155K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C3216JB1C155M                   | C3216X5R1C155M                   |

**RATED VOLTAGE E<sub>dc</sub>: 10V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|------------|---------------------|---------------------------------|----------------------------------|
|                     |            |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 2,200,000           | $\pm 10\%$ | 0.85 $\pm$ 0.10     | C3216JB1A225K                   | C3216X5R1A225K                   |
|                     | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C3216JB1A225M                   | C3216X5R1A225M                   |
| 3,300,000           | $\pm 10\%$ | 0.85+0.15, -0.10    | C3216JB1A335K                   | C3216X5R1A335K                   |
|                     | $\pm 20\%$ | 0.85+0.15, -0.10    | C3216JB1A335M                   | C3216X5R1A335M                   |

**RATED VOLTAGE E<sub>dc</sub>: 6.3V**

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                        |                                  |
|---------------------|------------|---------------------|---------------------------------|----------------------------------|
|                     |            |                     | Temperature characteristics: JB | Temperature characteristics: X5R |
| 10,000,000          | $\pm 10\%$ | 1.6 $\pm$ 0.15      | C3216JB0J106K                   | C3216X5R0J106K                   |
|                     | $\pm 20\%$ | 1.6 $\pm$ 0.15      | C3216JB0J106M                   | C3216X5R0J106M                   |
| 15,000,000          | $\pm 20\%$ | 1.6 $\pm$ 0.15      | C3216JB0J156M                   | C3216X5R0J156M                   |
| 22,000,000          | $\pm 20\%$ | 0.85 $\pm$ 0.10     | C3216JB0J226M                   | C3216X5R0J226M                   |
| 33,000,000          | $\pm 20\%$ | 1.3 $\pm$ 0.15      | C3216JB0J336M                   | C3216X5R0J336M                   |
| 47,000,000          | $\pm 20\%$ | 1.6 $\pm$ 0.15      | C3216JB0J476M                   | C3216X5R0J476M                   |

**TEMPERATURE CHARACTERISTICS: X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 3,300,000           | ±10%      | 1.15±0.15           | C3216X5R1C335K                               | C3216X7R1C335K                   |
|                     | ±20%      | 1.15±0.15           | C3216X5R1C335M                               | C3216X7R1C335M                   |
| 4,700,000           | ±10%      | 1.6±0.15            | C3216X5R1C475K                               | C3216X7R1C475K                   |
|                     | ±20%      | 1.6±0.15            | C3216X5R1C475M                               | C3216X7R1C475M                   |

**TEMPERATURE CHARACTERISTICS: X5R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R |
|---------------------|-----------|---------------------|----------------------------------------------|
| 15,000,000          | ±20%      | 1.6±0.15            | C3216X5R0J156M                               |

**TEMPERATURE CHARACTERISTICS: JF(+30, -80%), Y5V(+22, -82%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 4,700,000           | +80, -20% | 1.6±0.15            | C3216JF1H475Z                               | C3216Y5V1H475Z                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 10,000,000          | +80, -20% | 1.6±0.15            | C3216JF1E106Z                               | C3216Y5V1E106Z                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 22,000,000          | +80, -20% | 1.6±0.20            | C3216JF1C226Z                               | C3216Y5V1C226Z                   |

RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 47,000,000          | +80, -20% | 1.6±0.15            | C3216JF0J476Z                               | C3216Y5V0J476Z                   |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.


# C Series C3225(EIA CC1210) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 3225 | CH  | 1H  | 104 | J   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 3225 | 3.2×2.5mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | –25 to +85°C      |
| C0G                         | 0±30ppm/°C         | –55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | –25 to +85°C      |
| JF                          | +30, –80%          | –25 to +85°C      |
| X7R                         | ±15%               | –55 to +125°C     |
| X5R                         | ±15%               | –55 to +85°C      |
| Y5V                         | +22, –82%          | –30 to +85°C      |

(4) Rated voltage E<sub>dc</sub>

|    |      |
|----|------|
| 0J | 6.3V |
| 1A | 10V  |
| 1C | 16V  |
| 1E | 25V  |
| 1H | 50V  |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |

(6) Capacitance tolerance

|   |           |
|---|-----------|
| J | ±5%       |
| K | ±10%      |
| M | ±20%      |
| Z | +80, –20% |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 22,000              | ±5%       | 1.25±0.20           | C3225CH1H223J                               | C3225C0G1H223J                   |
| 33,000              | ±5%       | 1.6±0.20            | C3225CH1H333J                               | C3225C0G1H333J                   |
| 47,000              | ±5%       | 2.0±0.20            | C3225CH1H473J                               | C3225C0G1H473J                   |
| 68,000              | ±5%       | 2.0±0.20            | C3225CH1H683J                               | C3225C0G1H683J                   |
| 100,000             | ±5%       | 2.5±0.30            | C3225CH1H104J                               | C3225C0G1H104J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 470,000             | ±10%      | 1.15±0.10           | C3225JB1H474K                               | C3225X5R1H474K                   | C3225X7R1H474K                   |
|                     | ±20%      | 1.15±0.10           | C3225JB1H474M                               | C3225X5R1H474M                   | C3225X7R1H474M                   |
| 1,000,000           | ±10%      | 1.6±0.15            | C3225JB1H105K                               | C3225X5R1H105K                   | C3225X7R1H105K                   |
|                     | ±20%      | 1.6±0.15            | C3225JB1H105M                               | C3225X5R1H105M                   | C3225X7R1H105M                   |
| 1,500,000           | ±10%      | 2.0±0.20            | C3225JB1H155K                               | C3225X5R1H155K                   | C3225X7R1H155K                   |
|                     | ±20%      | 2.0±0.20            | C3225JB1H155M                               | C3225X5R1H155M                   | C3225X7R1H155M                   |
| 2,200,000           | ±10%      | 2.0±0.20            | C3225JB1H225K                               | C3225X5R1H225K                   | C3225X7R1H225K                   |
|                     | ±20%      | 2.0±0.20            | C3225JB1H225M                               | C3225X5R1H225M                   | C3225X7R1H225M                   |
| 3,300,000           | ±10%      | 2.5±0.20            | C3225JB1H335K                               | C3225X5R1H335K                   | C3225X7R1H335K                   |
|                     | ±20%      | 2.5±0.20            | C3225JB1H335M                               | C3225X5R1H335M                   | C3225X7R1H335M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 1,500,000           | ±10%      | 1.15±0.10           | C3225JB1E155K                               | C3225X5R1E155K                   | C3225X7R1E155K                   |
|                     | ±20%      | 1.15±0.10           | C3225JB1E155M                               | C3225X5R1E155M                   | C3225X7R1E155M                   |
| 2,200,000           | ±10%      | 1.15±0.10           | C3225JB1E225K                               | C3225X5R1E225K                   | C3225X7R1E225K                   |
|                     | ±20%      | 1.15±0.10           | C3225JB1E225M                               | C3225X5R1E225M                   | C3225X7R1E225M                   |
| 3,300,000           | ±10%      | 1.6±0.15            | C3225JB1E335K                               | C3225X5R1E335K                   | C3225X7R1E335K                   |
|                     | ±20%      | 1.6±0.15            | C3225JB1E335M                               | C3225X5R1E335M                   | C3225X7R1E335M                   |
| 4,700,000           | ±10%      | 2.0±0.20            | C3225JB1E475K                               | C3225X5R1E475K                   | C3225X7R1E475K                   |
|                     | ±20%      | 2.0±0.20            | C3225JB1E475M                               | C3225X5R1E475M                   | C3225X7R1E475M                   |
| 6,800,000           | ±10%      | 2.0±0.20            | C3225JB1E685K                               | C3225X5R1E685K                   | C3225X7R1E685K                   |
|                     | ±20%      | 2.0±0.20            | C3225JB1E685M                               | C3225X5R1E685M                   | C3225X7R1E685M                   |
| 10,000,000          | ±10%      | 2.5±0.20            | C3225JB1E106K                               | C3225X5R1E106K                   | C3225X7R1E106K                   |
|                     | ±20%      | 2.5±0.20            | C3225JB1E106M                               | C3225X5R1E106M                   | C3225X7R1E106M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 15,000,000          | ±20%      | 2.5±0.20            | C3225JB1C156M                               | C3225X5R1C156M                   | C3225X7R1C156M                   |
| 22,000,000          | ±20%      | 2.5±0.20            | C3225JB1C226M                               | C3225X5R1C226M                   | C3225X7R1C226M                   |

**TEMPERATURE CHARACTERISTICS: JB( $\pm 10\%$ ), X5R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 10V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|------------|---------------------|---------------------------------------------|----------------------------------|
| 15,000,000          | $\pm 20\%$ | 2.3 $\pm 0.20$      | C3225JB1A156M                               | C3225X5R1A156M                   |
| 22,000,000          | $\pm 20\%$ | 2.3 $\pm 0.20$      | C3225JB1A226M                               | C3225X5R1A226M                   |
| 33,000,000          | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225JB1A336M                               | C3225X5R1A336M                   |
| 47,000,000          | $\pm 20\%$ | 2.5 $\pm 0.20$      | C3225JB1A476M                               | C3225X5R1A476M                   |

RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R |
|---------------------|------------|---------------------|---------------------------------------------|----------------------------------|
| 68,000,000          | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225JB0J686M                               | C3225X5R0J686M                   |
| 100,000,000         | $\pm 20\%$ | 2.5 $\pm 0.40$      | C3225JB0J107M                               | C3225X5R0J107M                   |

**TEMPERATURE CHARACTERISTICS: X5R/X7R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|----------------------------------------------|----------------------------------|
| 2,200,000           | $\pm 10\%$ | 2.0 $\pm 0.20$      | C3225X5R1H225K                               | C3225X7R1H225K                   |
|                     | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225X5R1H225M                               | C3225X7R1H225M                   |
| 3,300,000           | $\pm 10\%$ | 2.5 $\pm 0.30$      | C3225X5R1H335K                               | C3225X7R1H335K                   |
|                     | $\pm 20\%$ | 2.5 $\pm 0.30$      | C3225X5R1H335M                               | C3225X7R1H335M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|----------------------------------------------|----------------------------------|
| 6,800,000           | $\pm 10\%$ | 2.5 $\pm 0.20$      | C3225X5R1E685K                               | C3225X7R1E685K                   |
|                     | $\pm 20\%$ | 2.5 $\pm 0.20$      | C3225X5R1E685M                               | C3225X7R1E685M                   |
| 10,000,000          | $\pm 10\%$ | 2.5 $\pm 0.30$      | C3225X5R1E106K                               | C3225X7R1E106K                   |
|                     | $\pm 20\%$ | 2.5 $\pm 0.30$      | C3225X5R1E106M                               | C3225X7R1E106M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|----------------------------------------------|----------------------------------|
| 10,000,000          | $\pm 10\%$ | 2.0 $\pm 0.20$      | C3225X5R1C106K                               | C3225X7R1C106K                   |
|                     | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225X5R1C106M                               | C3225X7R1C106M                   |
| 15,000,000          | $\pm 20\%$ | 2.5 $\pm 0.30$      | C3225X5R1C156M                               | C3225X7R1C156M                   |
| 22,000,000          | $\pm 20\%$ | 2.5 $\pm 0.30$      | C3225X5R1C226M                               | C3225X7R1C226M                   |

**TEMPERATURE CHARACTERISTICS: X5R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 10V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R |
|---------------------|------------|---------------------|----------------------------------------------|
| 15,000,000          | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225X5R1A156M                               |
| 22,000,000          | $\pm 20\%$ | 2.3 $\pm 0.30$      | C3225X5R1A226M                               |

RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R |
|---------------------|------------|---------------------|----------------------------------------------|
| 22,000,000          | $\pm 20\%$ | 1.6 $\pm 0.15$      | C3225X5R0J226M                               |
| 33,000,000          | $\pm 20\%$ | 2.0 $\pm 0.20$      | C3225X5R0J336M                               |
| 47,000,000          | $\pm 20\%$ | 2.5 $\pm 0.40$      | C3225X5R0J476M                               |

**TEMPERATURE CHARACTERISTICS: JF(+30, -80%), Y5V(+22, -82%)**
**RATED VOLTAGE Edc: 50V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 4,700,000           | +80,-20%  | 1.15±0.10           | C3225JF1H475Z                               | C3225Y5V1H475Z                   |
| 10,000,000          | +80,-20%  | 1.6±0.15            | C3225JF1H106Z                               | C3225Y5V1H106Z                   |

**RATED VOLTAGE Edc: 25V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 10,000,000          | +80,-20%  | 1.3±0.20            | C3225JF1E106Z                               | C3225Y5V1E106Z                   |
| 22,000,000          | +80,-20%  | 2.0±0.20            | C3225JF1E226Z                               | C3225Y5V1E226Z                   |

**RATED VOLTAGE Edc: 16V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 22,000,000          | +80,-20%  | 1.3±0.20            | C3225JF1C226Z                               | C3225Y5V1C226Z                   |
| 47,000,000          | +80,-20%  | 2.3±0.20            | C3225JF1C476Z                               | C3225Y5V1C476Z                   |

**RATED VOLTAGE Edc: 10V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 22,000,000          | +80,-20%  | 1.15±0.10           | C3225JF1A226Z                               | C3225Y5V1A226Z                   |
| 47,000,000          | +80,-20%  | 2.0±0.20            | C3225JF1A476Z                               | C3225Y5V1A476Z                   |

**RATED VOLTAGE Edc: 6.3V**

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 100,000,000         | +80,-20%  | 2.5±0.40            | C3225JF0J107Z                               | C3225Y5V0J107Z                   |

• For more information about the products or other capacitance or data, please contact us.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.


# C Series C4532(EIA CC1812) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 4532 | CH  | 1H  | 104 | J   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 4532 | 4.5×3.2mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 1 (Temperature compensation)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| CH                          | 0±60ppm/°C         | -25 to +85°C      |
| C0G                         | 0±30ppm/°C         | -55 to +125°C     |

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | -25 to +85°C      |
| JF                          | +30, -80%          | -25 to +85°C      |
| X7R                         | ±15%               | -55 to +125°C     |
| X5R                         | ±15%               | -55 to +85°C      |
| Y5V                         | +22, -82%          | -30 to +85°C      |

(4) Rated voltage E<sub>dc</sub>

|    |     |
|----|-----|
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1H | 50V |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |

(6) Capacitance tolerance

|   |           |
|---|-----------|
| J | ±5%       |
| K | ±10%      |
| M | ±20%      |
| Z | +80, -20% |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 1 (TEMPERATURE COMPENSATION)****TEMPERATURE CHARACTERISTICS: CH(0±60ppm/°C), C0G(0±30ppm/°C)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: CH | Temperature characteristics: C0G |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|
| 47,000              | ±5%       | 1.6±0.15            | C4532CH1H473J                               | C4532C0G1H473J                   |
| 68,000              | ±5%       | 1.6±0.15            | C4532CH1H683J                               | C4532C0G1H683J                   |
| 100,000             | ±5%       | 2.0±0.2             | C4532CH1H104J                               | C4532C0G1H104J                   |
| 150,000             | ±5%       | 2.5±0.3             | C4532CH1H154J                               | C4532C0G1H154J                   |
| 220,000             | ±5%       | 3.2±0.3             | C4532CH1H224J                               | C4532C0G1H224J                   |

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB(±10%), X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 1,500,000           | ±10%      | 1.6±0.15            | C4532JB1H155K                               | C4532X5R1H155K                   | C4532X7R1H155K                   |
|                     | ±20%      | 1.6±0.15            | C4532JB1H155M                               | C4532X5R1H155M                   | C4532X7R1H155M                   |
| 2,200,000           | ±10%      | 1.6±0.15            | C4532JB1H225K                               | C4532X5R1H225K                   | C4532X7R1H225K                   |
|                     | ±20%      | 1.6±0.15            | C4532JB1H225M                               | C4532X5R1H225M                   | C4532X7R1H225M                   |
| 3,300,000           | ±10%      | 2.0±0.20            | C4532JB1H335K                               | C4532X5R1H335K                   | C4532X7R1H335K                   |
|                     | ±20%      | 2.0±0.20            | C4532JB1H335M                               | C4532X5R1H335M                   | C4532X7R1H335M                   |
| 4,700,000           | ±10%      | 2.3±0.20            | C4532JB1H475K                               | C4532X5R1H475K                   | C4532X7R1H475K                   |
|                     | ±20%      | 2.3±0.20            | C4532JB1H475M                               | C4532X5R1H475M                   | C4532X7R1H475M                   |
| 6,800,000           | ±10%      | 2.5±0.30            | C4532JB1H685K                               | C4532X5R1H685K                   | C4532X7R1H685K                   |
|                     | ±20%      | 2.5±0.30            | C4532JB1H685M                               | C4532X5R1H685M                   | C4532X7R1H685M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 10,000,000          | ±10%      | 2.5±0.30            | C4532JB1E106K                               | C4532X5R1E106K                   | C4532X7R1E106K                   |
|                     | ±20%      | 2.5±0.30            | C4532JB1E106M                               | C4532X5R1E106M                   | C4532X7R1E106M                   |
| 15,000,000          | ±20%      | 2.5±0.30            | C4532JB1E156M                               | C4532X5R1E156M                   | C4532X7R1E156M                   |
| 22,000,000          | ±20%      | 2.5±0.30            | C4532JB1E226M                               | C4532X5R1E226M                   | C4532X7R1E226M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|---------------------------------------------|----------------------------------|----------------------------------|
| 22,000,000          | ±20%      | 2.0±0.20            | C4532JB1C226M                               | C4532X5R1C226M                   | C4532X7R1C226M                   |
| 33,000,000          | ±20%      | 2.5±0.30            | C4532JB1C336M                               | C4532X5R1C336M                   | C4532X7R1C336M                   |

**TEMPERATURE CHARACTERISTICS: X5R/X7R(±15%)**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 4,700,000           | ±10%      | 2.0±0.20            | C4532X5R1H475K                               | C4532X7R1H475K                   |
|                     | ±20%      | 2.0±0.20            | C4532X5R1H475M                               | C4532X7R1H475M                   |
| 6,800,000           | ±10%      | 2.5±0.30            | C4532X5R1H685K                               | C4532X7R1H685K                   |
|                     | ±20%      | 2.5±0.30            | C4532X5R1H685M                               | C4532X7R1H685M                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 15,000,000          | ±20%      | 2.8±0.30            | C4532X5R1E156M                               | C4532X7R1E156M                   |
| 22,000,000          | ±20%      | 2.5±0.30            | C4532X5R1E226M                               | C4532X7R1E226M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance | Thickness T<br>(mm) | Part No.<br>Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|-----------|---------------------|----------------------------------------------|----------------------------------|
| 15,000,000          | ±20%      | 2.0±0.20            | C4532X5R1C156M                               | C4532X7R1C156M                   |

**TEMPERATURE CHARACTERISTICS: X5R( $\pm 15\%$ )**

RATED VOLTAGE Edc: 10V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                                           |
|---------------------|------------|---------------------|----------------------------------------------------|
| 100,000,000         | $\pm 20\%$ | 2.8 $\pm$ 0.30      | Temperature characteristics: X5R<br>C4532X5R1A107M |

RATED VOLTAGE Edc: 6.3V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.                                           |
|---------------------|------------|---------------------|----------------------------------------------------|
| 100,000,000         | $\pm 20\%$ | 2.8 $\pm$ 0.30      | Temperature characteristics: X5R<br>C4532X5R0J107M |

**TEMPERATURE CHARACTERISTICS: JF(+30,  $-80\%$ ), Y5V(+22,  $-82\%$ )**

RATED VOLTAGE Edc: 50V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.                                           |
|---------------------|--------------|---------------------|----------------------------------------------------|
| 10,000,000          | +80, $-20\%$ | 2.0 $\pm$ 0.20      | Temperature characteristics: JF<br>C4532JF1H106Z   |
|                     |              |                     | Temperature characteristics: Y5V<br>C4532Y5V1H106Z |

RATED VOLTAGE Edc: 25V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.                                           |
|---------------------|--------------|---------------------|----------------------------------------------------|
| 22,000,000          | +80, $-20\%$ | 2.0 $\pm$ 0.20      | Temperature characteristics: JF<br>C4532JF1E226Z   |
|                     |              |                     | Temperature characteristics: Y5V<br>C4532Y5V1E226Z |

RATED VOLTAGE Edc: 16V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.                                           |
|---------------------|--------------|---------------------|----------------------------------------------------|
| 47,000,000          | +80, $-20\%$ | 2.5 $\pm$ 0.30      | Temperature characteristics: JF<br>C4532JF1C476Z   |
|                     |              |                     | Temperature characteristics: Y5V<br>C4532Y5V1C476Z |

RATED VOLTAGE Edc: 10V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.                                           |
|---------------------|--------------|---------------------|----------------------------------------------------|
| 100,000,000         | +80, $-20\%$ | 2.5 $\pm$ 0.30      | Temperature characteristics: JF<br>C4532JF1A107Z   |
|                     |              |                     | Temperature characteristics: Y5V<br>C4532Y5V1A107Z |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.


# C Series C5750(EIA CC2220) Type

Conformity to RoHS Directive

## FEATURES

- High capacitance has been achieved through precision technologies that enable the use of multiple thinner ceramic dielectric layers.
- A monolithic structure ensures superior mechanical strength and reliability.
- High-accuracy automatic mounting is facilitated through the maintenance of very precise dimensional tolerances.
- Composed of only ceramics and metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes.
- Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process.
- Low residual inductance assures superior frequency characteristics.
- Because electrostatic capacity has been obtained up to the electrolytic capacitor range, these capacitors offer long service life and are optimally suited for power supply designs that require high levels of reliability.
- Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for high frequency and high-density type power supplies.

## SHAPES AND DIMENSIONS



Dimensions in mm



## PRODUCT IDENTIFICATION

| C   | 5750 | JB  | 1E  | 106 | K   | □   |
|-----|------|-----|-----|-----|-----|-----|
| (1) | (2)  | (3) | (4) | (5) | (6) | (7) |

(1) Series name

(2) Dimensions L×W

|      |           |
|------|-----------|
| 5750 | 5.7×5.0mm |
|------|-----------|

(3) Capacitance temperature characteristics

Class 2 (Temperature stable and general purpose)

| Temperature characteristics | Capacitance change | Temperature range |
|-----------------------------|--------------------|-------------------|
| JB                          | ±10%               | -25 to +85°C      |
| JF                          | +30, -80%          | -25 to +85°C      |
| X7R                         | ±15%               | -55 to +125°C     |
| X5R                         | ±15%               | -55 to +85°C      |
| Y5V                         | +22, -82%          | -30 to +85°C      |

(4) Rated voltage E<sub>dc</sub>

|    |     |
|----|-----|
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1H | 50V |

(5) Nominal capacitance

The capacitance is expressed in three digit codes and in units of pico farads (pF).

The first and second digits identify the first and second significant figures of the capacitance.

The third digit identifies the multiplier.

|     |         |
|-----|---------|
| 010 | 1pF     |
| 100 | 10pF    |
| 102 | 1,000pF |

(6) Capacitance tolerance

|   |           |
|---|-----------|
| K | ±10%      |
| M | ±20%      |
| Z | +80, -20% |

(7) Packaging style

|   |               |
|---|---------------|
| T | Taping (reel) |
| B | Bulk          |

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.  
Please read the precautions before using this catalog.

**CAPACITANCE RANGES: CLASS 2****TEMPERATURE CHARACTERISTICS: JB( $\pm 10\%$ ), X5R/X7R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.      | Temperature characteristics: JB | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|---------------|---------------------------------|----------------------------------|----------------------------------|
| 10,000,000          | $\pm 10\%$ | 2.0 $\pm$ 0.20      | C5750JB1E106K |                                 | C5750X5R1E106K                   | C5750X7R1E106K                   |
|                     | $\pm 20\%$ | 2.0 $\pm$ 0.20      | C5750JB1E106M |                                 | C5750X5R1E106M                   | C5750X7R1E106M                   |

**TEMPERATURE CHARACTERISTICS: X5R/X7R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.       | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|----------------|----------------------------------|----------------------------------|
| 10,000,000          | $\pm 10\%$ | 2.3 $\pm$ 0.20      | C5750X5R1H106K |                                  | C5750X7R1H106K                   |
|                     | $\pm 20\%$ | 2.3 $\pm$ 0.20      | C5750X5R1H106M |                                  | C5750X7R1H106M                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.       | Temperature characteristics: X5R | Temperature characteristics: X7R |
|---------------------|------------|---------------------|----------------|----------------------------------|----------------------------------|
| 33,000,000          | $\pm 20\%$ | 2.0 $\pm$ 0.20      | C5750X5R1C336M |                                  | C5750X7R1C336M                   |
| 47,000,000          | $\pm 20\%$ | 2.3 $\pm$ 0.20      | C5750X5R1C476M |                                  | C5750X7R1C476M                   |

**TEMPERATURE CHARACTERISTICS: X5R( $\pm 15\%$ )**RATED VOLTAGE E<sub>dc</sub>: 10V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.       | Temperature characteristics: X5R |
|---------------------|------------|---------------------|----------------|----------------------------------|
| 68,000,000          | $\pm 20\%$ | 2.3 $\pm$ 0.20      | C5750X5R1A686M |                                  |
| 100,000,000         | $\pm 20\%$ | 2.8 $\pm$ 0.30      | C5750X5R1A107M |                                  |

RATED VOLTAGE E<sub>dc</sub>: 6.3V

| Capacitance<br>(pF) | Tolerance  | Thickness T<br>(mm) | Part No.       | Temperature characteristics: X5R |
|---------------------|------------|---------------------|----------------|----------------------------------|
| 100,000,000         | $\pm 20\%$ | 2.8 $\pm$ 0.30      | C5750X5R0J107M |                                  |

**TEMPERATURE CHARACTERISTICS: JF(+30,  $-80\%$ ), Y5V(+22,  $-82\%$ )**RATED VOLTAGE E<sub>dc</sub>: 50V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.      | Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|--------------|---------------------|---------------|---------------------------------|----------------------------------|
| 22,000,000          | +80, $-20\%$ | 2.0 $\pm$ 0.20      | C5750JF1H226Z |                                 | C5750Y5V1H226Z                   |

RATED VOLTAGE E<sub>dc</sub>: 25V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.      | Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|--------------|---------------------|---------------|---------------------------------|----------------------------------|
| 47,000,000          | +80, $-20\%$ | 2.0 $\pm$ 0.20      | C5750JF1E476Z |                                 | C5750Y5V1E476Z                   |

RATED VOLTAGE E<sub>dc</sub>: 16V

| Capacitance<br>(pF) | Tolerance    | Thickness T<br>(mm) | Part No.      | Temperature characteristics: JF | Temperature characteristics: Y5V |
|---------------------|--------------|---------------------|---------------|---------------------------------|----------------------------------|
| 100,000,000         | +80, $-20\%$ | 2.5 $\pm$ 0.30      | C5750JF1C107Z |                                 | C5750Y5V1C107Z                   |

• For more information about the products of other capacitance or data, please contact us.

• All specifications are subject to change without notice.

Please read the precautions before using this catalog.