


# PCI-1245L

## 4-Axis Stepping and Servo Motor Control Universal PCI Card

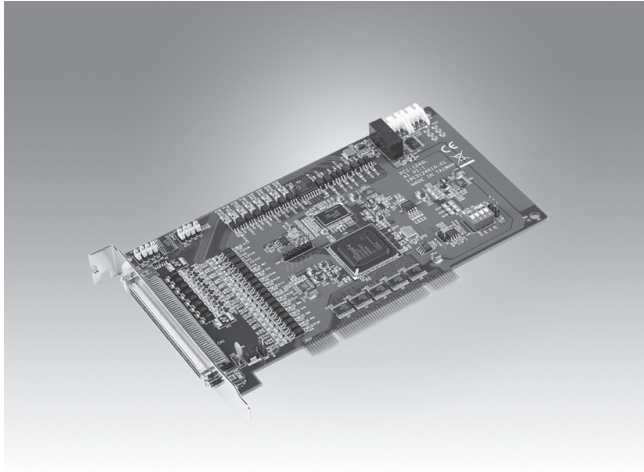

### Features

- Encoder input is 10 MHz for 4xAB mode, 2.5 MHz for CW/CCW mode
- Pulse output up to 1 Mpps and the output type can be switched to differential or single-end by jumper setting
- Supports 2 axis linear interpolation
- Supports 3 axis linear interpolation (PCI-1245LIO only)
- Supports 2 axis arc interpolation (PCI-1245LIO only)
- Supports T/S-curve
- Supports speed override
- Hardware emergency input
- Watchdog timer
- Supports programmable acceleration/deceleration rate
- Programmable interrupt
- RDY dedicated input channels & SVON/ERC dedicated output channels are switchable for general input and output purposes
- Supports extra 16 isolated DI / 16 isolated DO via wiring board (PCI-1245LIO only)

### Introduction

The PCI-1245L are 4-axis universal PCI card supporting (both 3.3 V and 5 V signal slots) stepping/pulse-type servo motor control cards designed for entry-level applications which need to control JOG, point to point, continuous move, and interpolation motion such as 2-axis linear. In addition, all Advantech motion controllers use the "Common Motion API" architecture which is a unified user programming interface and graphical utility. This architecture saves application maintenance and upgrades. Programmers can benefit from integrating any Advantech SoftMotion controller without changing large amounts of the application code. User-friendly examples decrease programming workload, helping users complete configuration and diagnosis easily.

### Specifications

#### Pulse Type Motion Control

- **Motor Driver Support** Pulse-type servo/stepping
- **Number of Axes** 4
- **Interpolation** 2-axis linear interpolation
- **Max. Output Speed** 1 Mbps
- **Step Count Range**  $\pm 2, 147, 483, 646$
- **Pulse Output Type** Pulse/direction (1-pulse, 1-direction type), CW/CCW (2-pulse type) or single-ended +5V output
- **Position Counters** Range of command and actual position
- **Velocity Profiles** T-Curve, S-Curve
- **Local I/O**
  - Machine Interfaces: LMT+, LMT-, ORG
  - Servo Driver Interfaces: ALM, INP

#### Encoder Interface

- **Input Type** Quadrature (A/B phase) or up/down
- **Counts per Enc. Cycle** x1, x2, x4 (A/B phase only)
- **Input Range** 3~10 V
- **Isolation Protection** 2,500 V<sub>dc</sub>
- **Max. Input Frequency** 10 MHz under 4xAB mode

#### General

- **Bus Type** Universal PCI V2.2
- **Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 0.6 A  
Max.: 5 V @ 1 A
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1245L-AE** 4-axis Stepping/Pulse-type Servo Motor Control Universal PCI Card

#### Accessories

- **MTB-3956LIO-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board w/ I/O-extension (Only for PCI-1245LIO)
- **ADAM-3956-AE** 100-pin DIN-rail SCSI 4-axis Motion Wiring Board
- **ADAM-3955-AE** 50-pin DIN-rail SCSI 2-axis Motion Wiring Board
- **ADAM-3952-AE** 50-pin DIN-rail SCSI and Box Header Board
- **PCL-101100M-1E/2E/3E** 100-pin SCSI Cable, 1m/2m/3m
- **PCL-10251-1E/2E/3E** 100-pin SCSI to Two 50-pin SCSI Cable, 1m/2m/3m
- **PCL-20153PA5-S2E** 50-pin Cable to Panasonic A4/A5 Servo, 2 m
- **PCL-20153YS5-S2E** 50-pin Cable to Yaskawa Sigma V/7 Servo, 2 m
- **PCL-20153MJ3-S2E** 50-pin Cable to Mitsubishi J3/J4 Servo, 2 m
- **PCL-20153DA2-S2E** 50-pin Cable to Delta A2 Servo, 2 m