

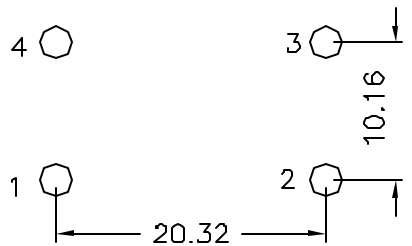


### 1. Mechanical Dimensions:

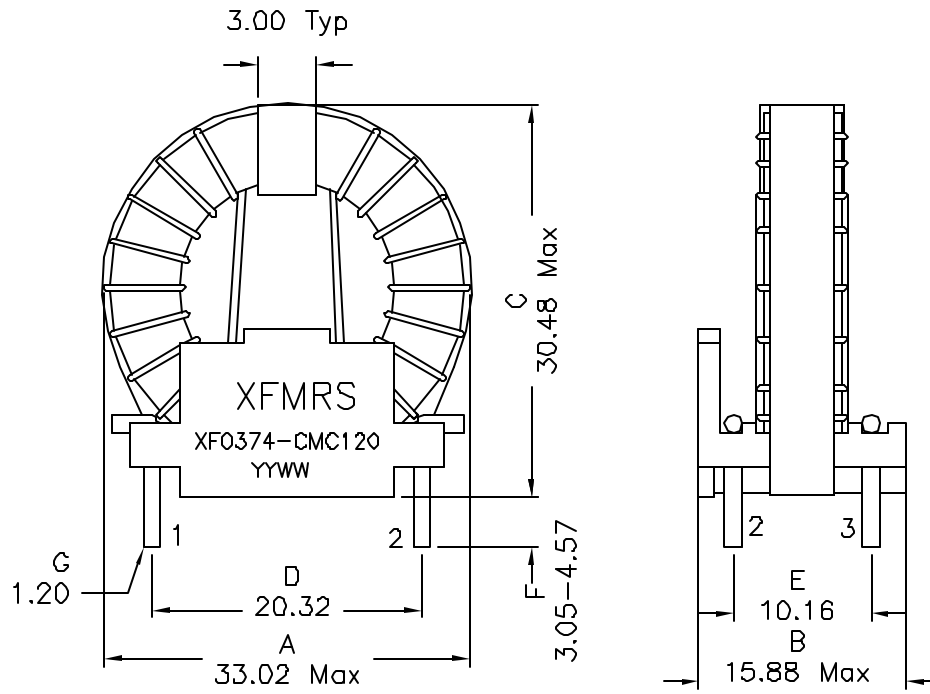

SUGGESTED FOOTPRINT

### 2. Schematic:

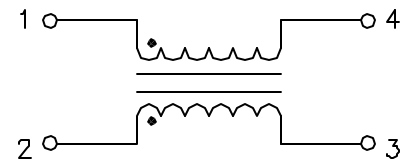

### 3. Electrical Specifications:

- OCL: 3.7mH Min @15.75KHz 0.1V, Each Wdg
- LL: Pins 1-4 40.0uH Max @100KHz 0.1V, Short all else
- Rated Current: 4.0Arms
- DCR: 0.040 Ohms Max, Each Wdg
- HIPOT: 1250Vrms, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

<b>XFMRS Inc</b>	Title: <b>Common Mode Choke</b>		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.20 Dimensions in mm	P/N: XF0374-CMC120	REV. A	
	DWN.	Juan Mao	Apr-10-07
SHEET 1 OF 1	CHK.	YK Liao	Apr-10-07
	APP.	Joe Huff	Apr-10-07

DOC REV: A/6