

PIN HEADERS

SINGLE ROW RIGHT ANGLE 1.27MM

- Industry compatible
- Competitively priced
- Gold plated contacts
- No. of contacts 02 to 50
- 1.27mm pitch




SECTION 8

SPECIFICATION



Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

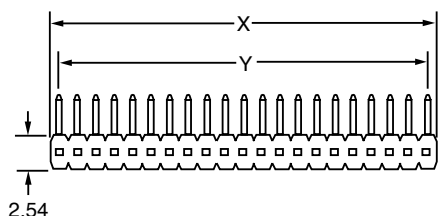

x	1.27 * Position No.
y	1.27 * (Position No.1)

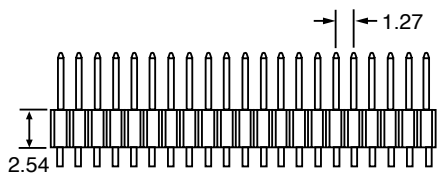

ORDERING INFORMATION

DBC	PH	C10	10	A	G	1
Dubilier Connectors	Pin HHeader Connector	Series	No. of Contacts	Contact Material	Contact Plating	Colour
			02 = 2way thro to 50 = 50way	A = Brass	G = Gold Plating	1 = Black