

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0459850453

Status:

Active

Overview:

extreme_lphpower

Description:

1.27mm (.050") Pitch, EXTreme LPHPower™ Plug with Guides and Pegs, Right Angle, 28 Signal Contacts, Select Gold (Au) Plating, for 1.57mm (.061") Thick PC Board

Documents:	
3D Model	Product Specification PS-45984-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
TUV	30683046
UL	E29179

General

Product Family	PCB Headers
Series	45985
Application	Board-to-Board
Overview	extreme_lphpower
Product Name	EXTreme PowerPlus™

Physical

Breakaway	No
Circuits (Loaded)	28
Circuits (maximum)	28
Circuits Detail	28 Signal
Color - Resin	Black
Durability (mating cycles max)	250
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.114 In
PC Tail Length (mm)	2.90 mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness Recommended (in)	0.061 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	150, 50
Plating min: Termination (µm)	1.25, 3.75
Polarized to Mating Part	Yes
Polarized to PCB	Yes

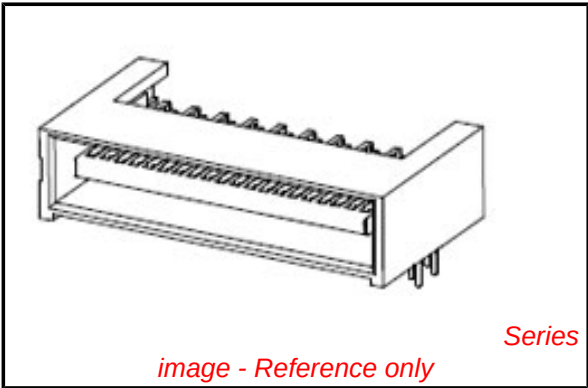

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Halogen-Free Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

45985Series

Mates With

45984 EXTreme LPHPower™ PCB Receptacles

Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	1A
Voltage - Maximum	250V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	20
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info





Reference - Drawing Numbers

Packaging Specification	PK-45984-001
Product Specification	PS-45984-001
Sales Drawing	SD-45985-483

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

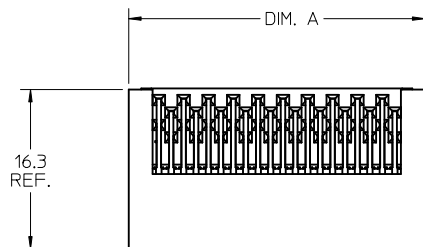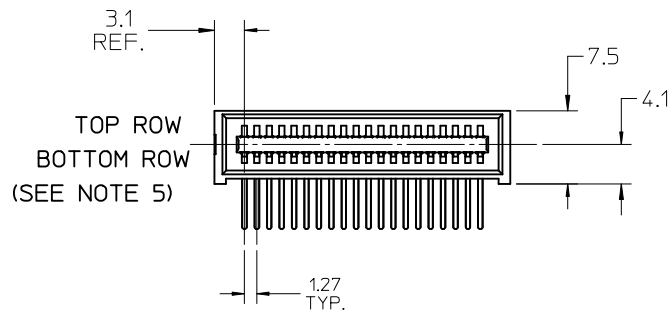


NO OF SIGNAL	MATERIAL NUMBER	DIM A	DIM P	PCB THK
12	45985-0111	12.5	4.50	3.18
16	45985-0121	15.0		
20	45985-0131	17.6		
24	45985-0141	20.1		
28	45985-0151	22.6		
32	45985-0161	25.2	3.60	2.36
36	45985-0171	27.7		
40	45985-0181	30.3		
12	45985-0112	12.5		
16	45985-0122	15.0		
20	45985-0132	17.6		
24	45985-0142	20.1		
28	45985-0152	22.6		
32	45985-0162	25.2		
36	45985-0172	27.7		
40	45985-0182	30.3	2.90	1.57
12	45985-0113	12.5		
16	45985-0123	15.0		
20	45985-0133	17.6		
24	45985-0143	20.1		
28	45985-0153	22.6		
32	45985-0163	25.2		
36	45985-0173	27.7		
40	45985-0183	30.3		

NOTES:

1. MATERIAL: HOUSING - 30 % GLASS FILLED LCP
UL94V-0, COLOR: BLACK
TERMINALS: COPPER ALLOY
2. PLATING: 0.76 MICROMETER /(30 M.I.) MIN. SELECT GOLD
3.81 MICROMETER/(150 M.I.) MIN SELECT TIN, BOTH OVER
1.27 MICROMETER/(50 M.I.) MIN NICKEL OVERALL.
3. PRODUCT SPECIFICATION: PS-45984-001.
4. PACKAGING SPECIFICATION: PK-45984-001.
5. SEE SHEET 5 FOR CIRCUIT IDENTIFICATION.
6. PARTS ARE RoHS COMPLIANT.
7. MATES WITH 45984, 46113 SERIES RECEPTACLE.


REVISED EC NO: UCP2010-1874 DRAWN BY: MBANDURA CHKD: MBANDURA APPR: APATEL REV B	DESCRIPTION REV B	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY BANDURA	DATE 5/1/2006	TITLE LPH PLUG ASSEMBLY SIGNAL CONNECTOR		
						CHECKED BY	DATE			
						BANDURA	5/1/2006	MOLEX INCORPORATED	DOCUMENT NO. SD-45985-483	SHEET NO. 1 OF 5
						APPROVED BY	DATE			
						PATEL	5/5/2006			
ANGULAR ±1/2°		MATERIAL NO.								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

9 8 7 6 5 4 3 2 1

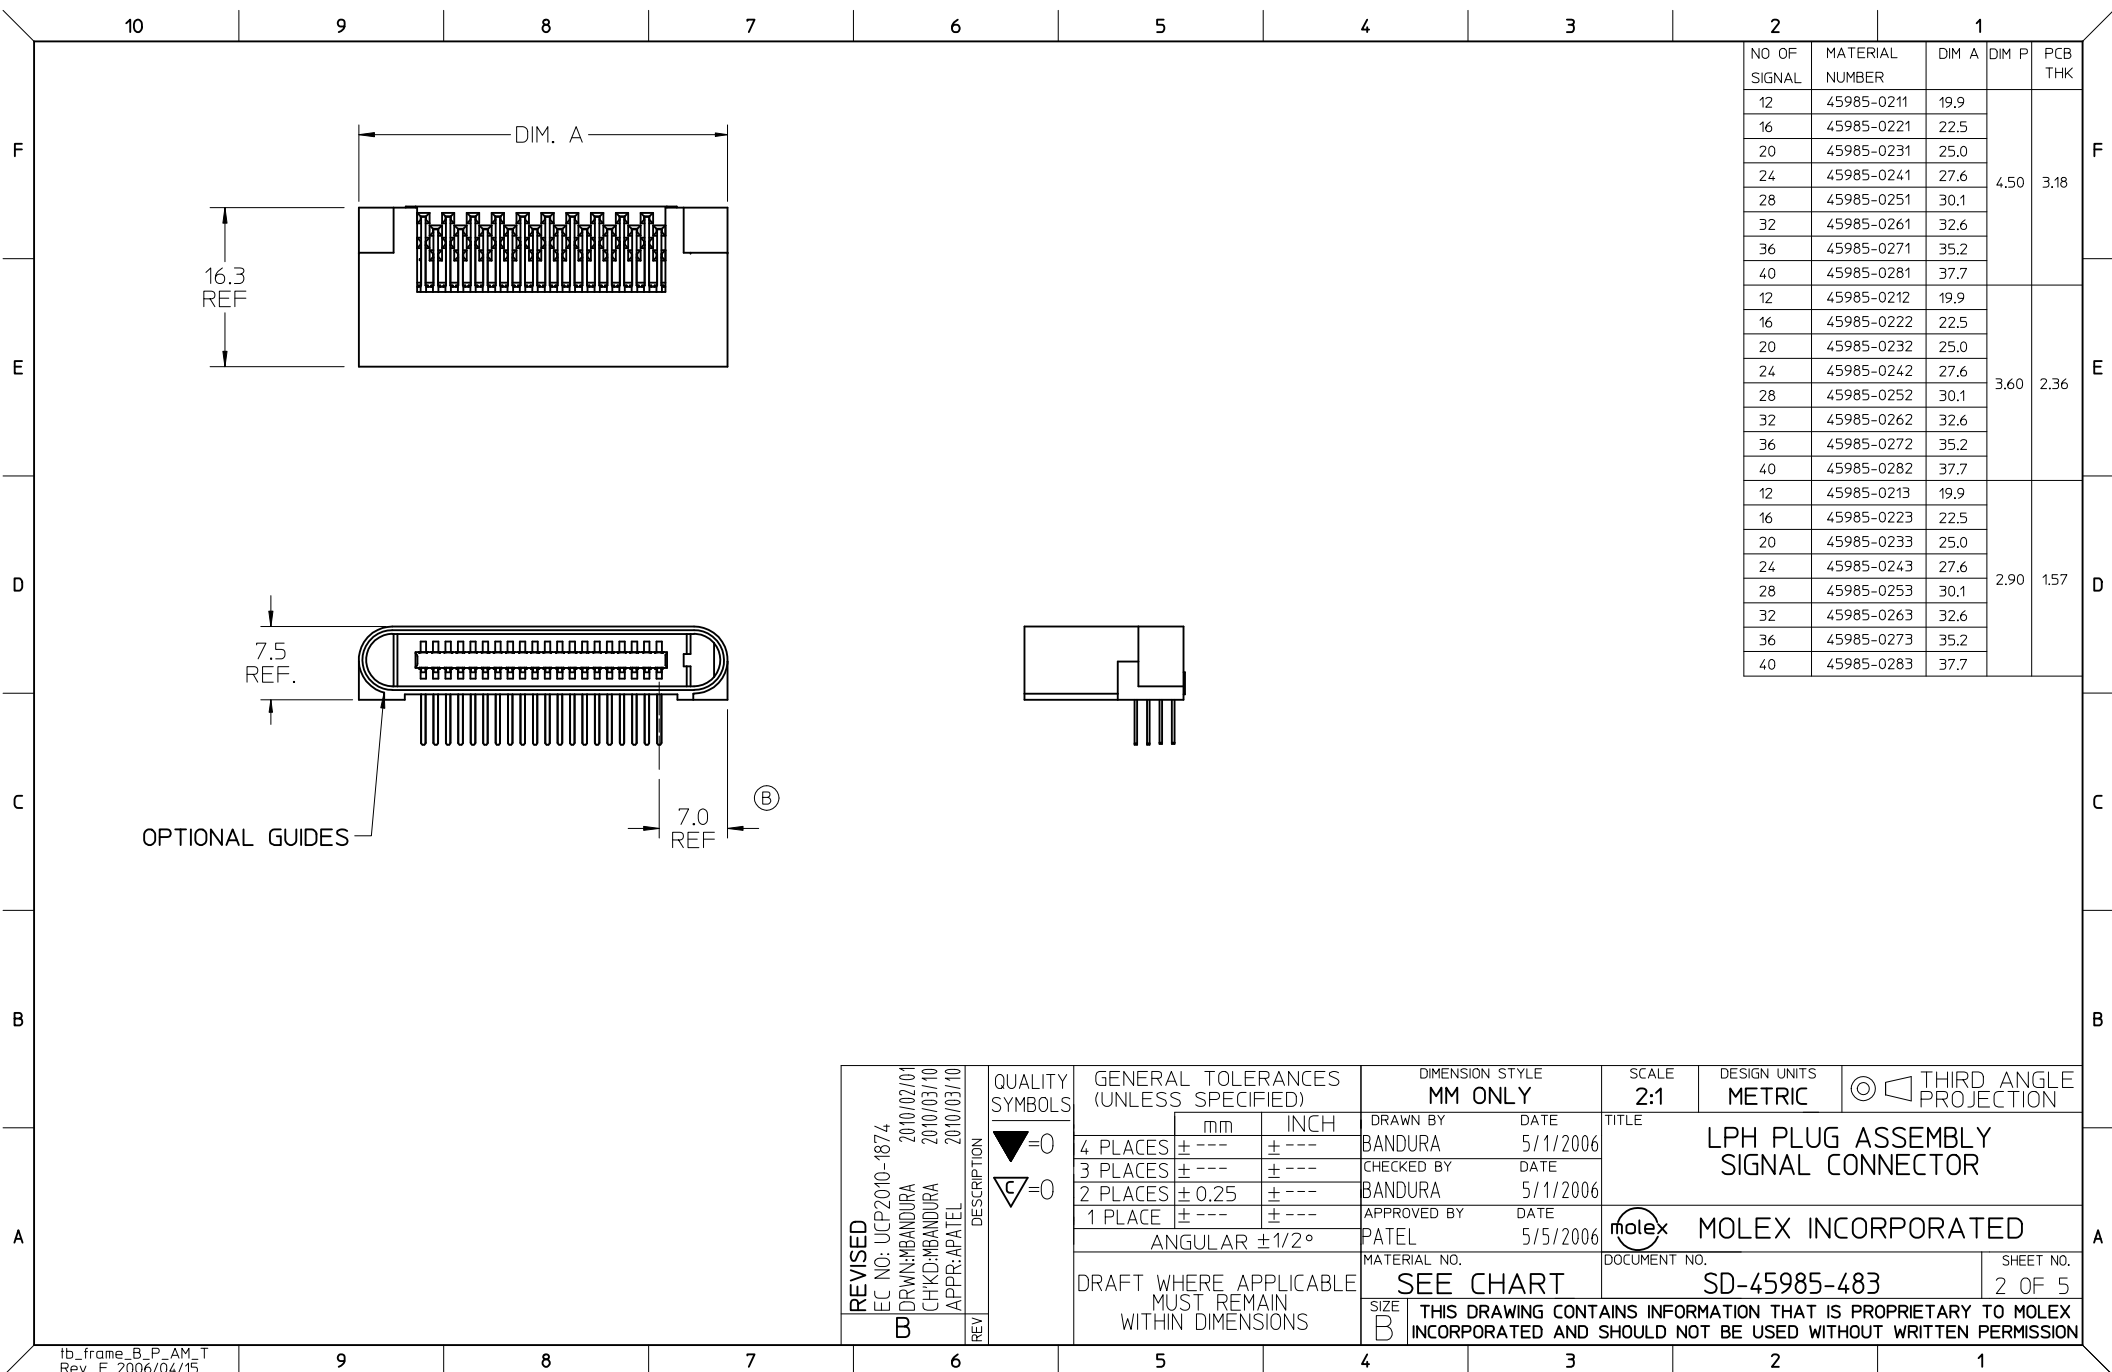


NO OF SIGNAL	MATERIAL NUMBER	DIM A	DIM P	PCB THK
12	45985-0211	19.9	4.50	3.18
16	45985-0221	22.5		
20	45985-0231	25.0		
24	45985-0241	27.6		
28	45985-0251	30.1		
32	45985-0261	32.6		
36	45985-0271	35.2	3.60	2.36
40	45985-0281	37.7		
12	45985-0212	19.9		
16	45985-0222	22.5		
20	45985-0232	25.0		
24	45985-0242	27.6		
28	45985-0252	30.1		
32	45985-0262	32.6		
36	45985-0272	35.2	2.90	1.57
40	45985-0282	37.7		
12	45985-0213	19.9		
16	45985-0223	22.5		
20	45985-0233	25.0		
24	45985-0243	27.6		
28	45985-0253	30.1		
32	45985-0263	32.6		
36	45985-0273	35.2		
40	45985-0283	37.7		

REVISED EC NO: UCP2010-1874 DRAWN:MBANDURA 2010/02/01 CHKD:MBANDURA 2010/03/10 APPR:APATEL 2010/03/10 B	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY BANDURA	DATE 5/1/2006	TITLE LPH PLUG ASSEMBLY SIGNAL CONNECTOR			
			4 PLACES	± ---	± ---	CHECKED BY	DATE				
			3 PLACES	± ---	± ---	BANDURA	5/1/2006				
			2 PLACES	± 0.25	± ---	APPROVED BY	DATE				
			1 PLACE	± ---	± ---	PATEL	5/5/2006	 MOLEX INCORPORATED			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
					SEE CHART		SD-45985-483		2 OF 5		
			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



tb_frame_B_P_AM_T
Rev. E 2006/04/15


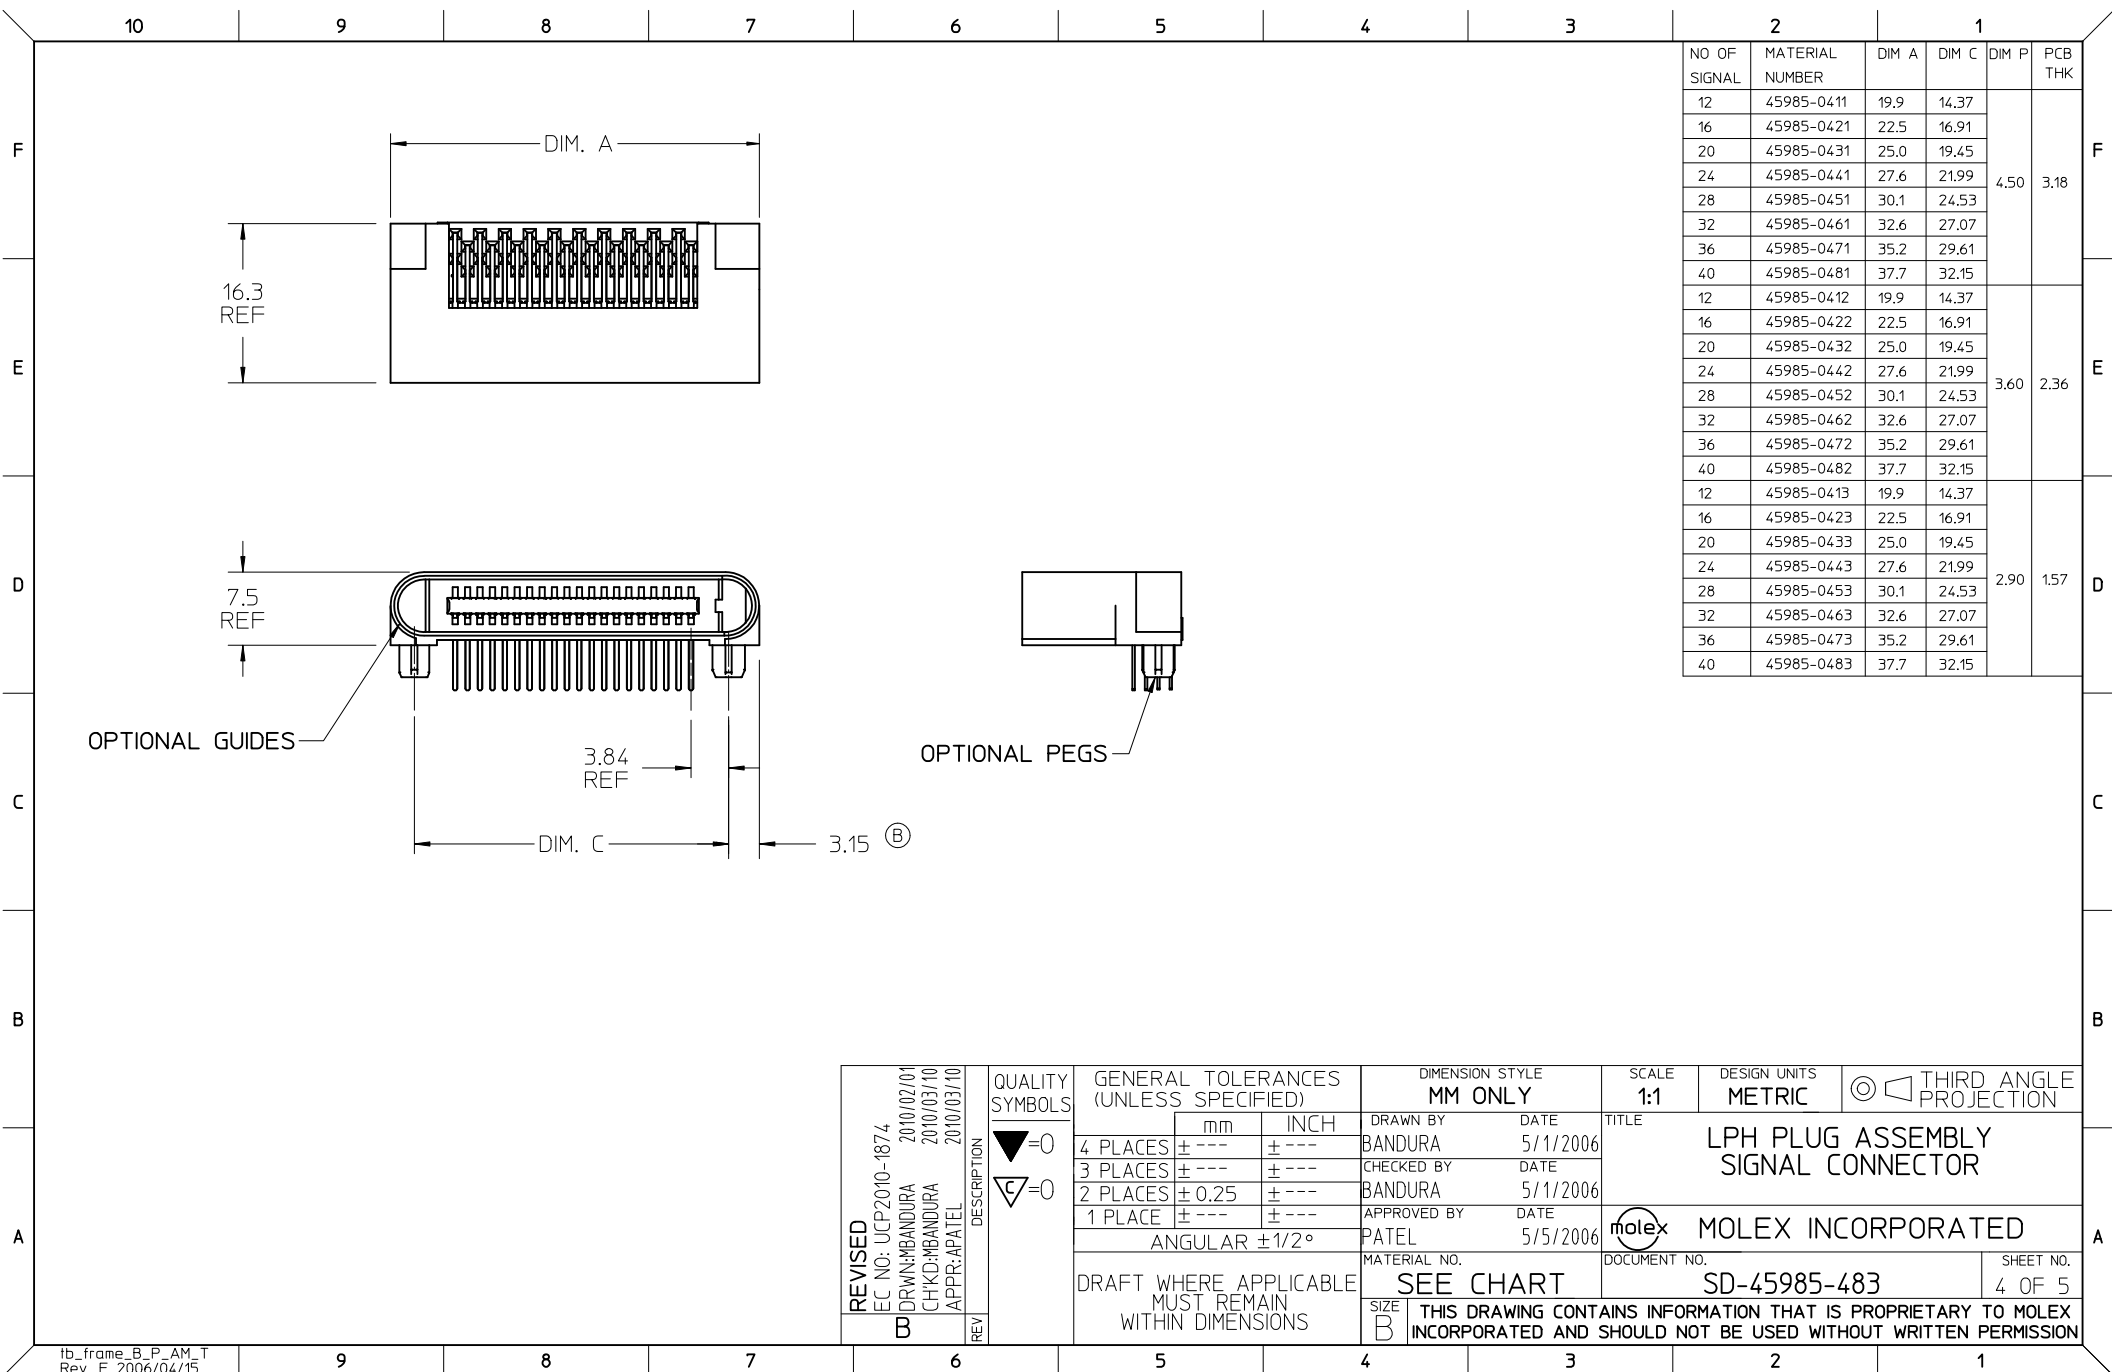


NO OF SIGNAL	MATERIAL NUMBER	DIM A	DIM C	DIM P	PCB THK
12	45985-0411	19.9	14.37	4.50	3.18
16	45985-0421	22.5	16.91		
20	45985-0431	25.0	19.45		
24	45985-0441	27.6	21.99		
28	45985-0451	30.1	24.53		
32	45985-0461	32.6	27.07		
36	45985-0471	35.2	29.61	3.60	2.36
40	45985-0481	37.7	32.15		
12	45985-0412	19.9	14.37		
16	45985-0422	22.5	16.91		
20	45985-0432	25.0	19.45		
24	45985-0442	27.6	21.99		
28	45985-0452	30.1	24.53	2.90	1.57
32	45985-0462	32.6	27.07		
36	45985-0472	35.2	29.61		
40	45985-0482	37.7	32.15		
12	45985-0413	19.9	14.37		
16	45985-0423	22.5	16.91		
20	45985-0433	25.0	19.45	2.90	1.57
24	45985-0443	27.6	21.99		
28	45985-0453	30.1	24.53		
32	45985-0463	32.6	27.07		
36	45985-0473	35.2	29.61	37.7	32.15
40	45985-0483	37.7	32.15		


REVISED EC NO: UCP2010-1874 DRWN:MBANDURA 2010/02/01 CHKD:MBANDURA 2010/03/10 APPR:APATEL 2010/03/10 B	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		▼=0			DRAWN BY	DATE	TITLE LPH PLUG ASSEMBLY SIGNAL CONNECTOR				
		▽=0			CHECKED BY	DATE					
			4 PLACES ± --- ± ---	BANDURA	5/1/2006	MOLEX INCORPORATED					
			3 PLACES ± --- ± ---								
			2 PLACES ± 0.25 ± ---	BANDURA	5/1/2006	MATERIAL NO. DOCUMENT NO. SD-45985-483					
			1 PLACE ± --- ± ---	APPROVED BY	DATE						SHEET NO. 4 OF 5
			ANGULAR ±1/2°		PATEL	5/5/2006					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10 9 8 7 6 5 4 3 2 1

NO OF SIGNAL	DIM C
12	14.37
16	16.91
20	19.45
24	21.99
28	24.53
32	27.07
36	29.61
40	32.15

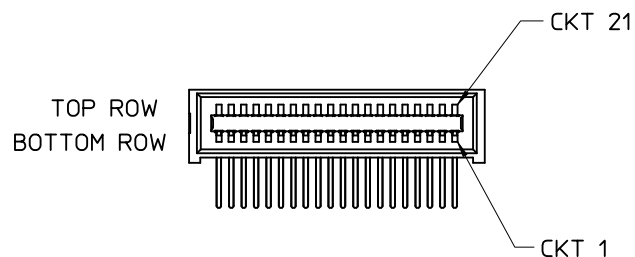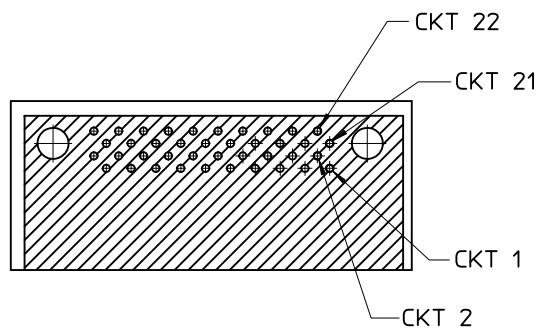

CIRCUIT IDENTIFICATION
(40 CIRCUIT SHOWN)

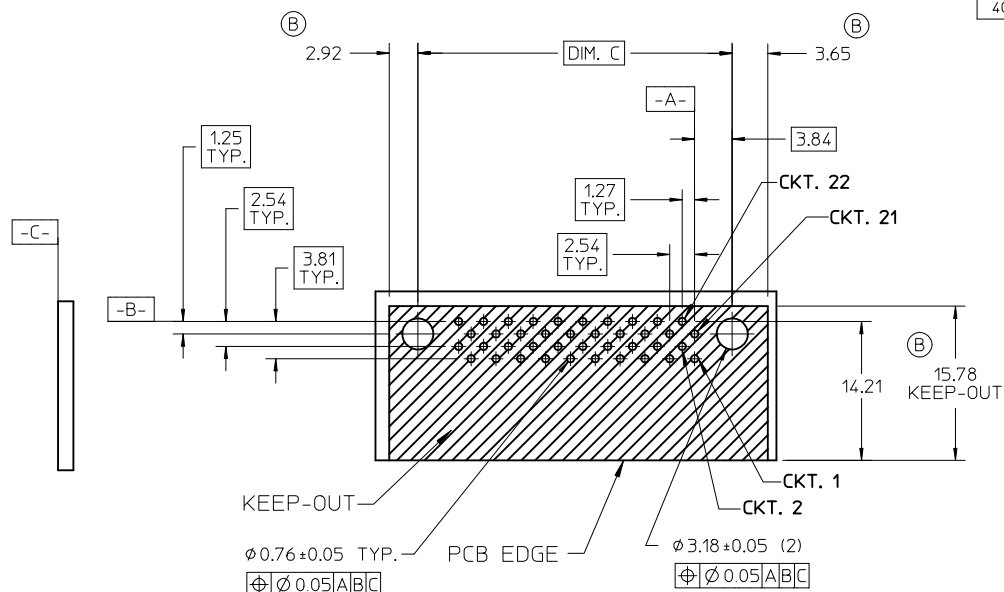

RECOMMENDED PCB LAYOUT
SHOWN FROM COMPONENT SIDE

REVISED EC NO: UCP2010-1874 DRAWN: BANDURA 2010/02/01 CHKD: MBANDURA 2010/03/10 APPR: APATEL 2010/03/10 B	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.25 ± --- 1 PLACE ± --- ± --- ANGULAR ± 1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY DATE BANDURA 5/1/2006 CHECKED BY DATE BANDURA 5/1/2006 APPROVED BY DATE PATEL 5/5/2006 MATERIAL NO. SEE CHART SIZE B	SCALE 1:1 TITLE LPH PLUG ASSEMBLY SIGNAL CONNECTOR MOLEX INCORPORATED SD-45985-483 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DESIGN UNITS METRIC THIRD ANGLE PROJECTION	SHEET NO. 5 OF 5

9 8 7 6 5 4 3 2 1