


# ISDN S-INTERFACE TRANSFORMERS


TM0048

## MECHANICAL

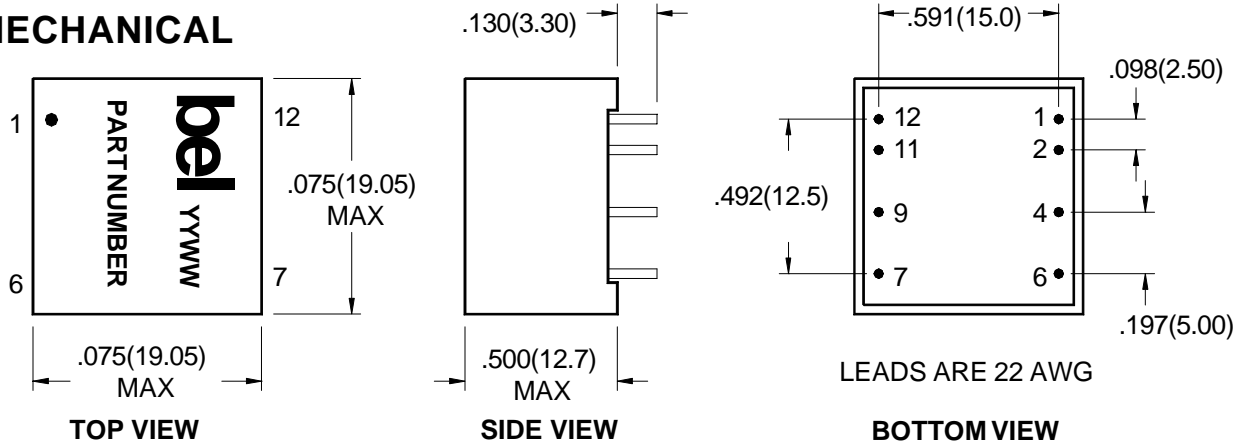

Dimensions are in inches (mm) +/- .010(.254) unless noted otherwise.

## SCHEMATIC

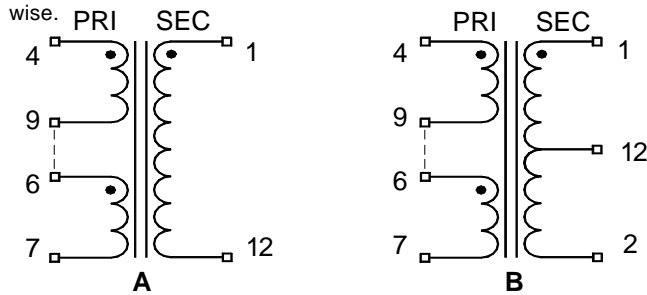

## ELECTRICALS @ 25° C

Part Number	Turns Ratio (Pri:Sec) +/-2%	Unbalanced I <sub>DC</sub> (mA MAX)	OCL Primary (mH MIN)	L <sub>L</sub> Sec (uH)	C <sub>WW</sub> (pF MAX)	C <sub>D</sub> (pF MAX)	DCR (ohms +/-25%)		Schematic
							Pri	Sec	
0559-6200-06	1:2CT	5	22	15max	60	80	3.0	5.5	B
0559-6200-07	1:1	5	22	5max	40	40	2.8	2.7	A
0559-6200-08	1:2	5	22	15max	60	80	3.0	5.5	A
0559-6200-09	1:2.5	5	22	8 - 40	40	110	3.0	7.0	A
0559-6200-10	1:2	5	22	11max	50	110	2.8	5.5	A

3000 Vrms Isolation Voltage

### Corporate Office

**Bel Fuse Inc.**  
 198 Van Vorst Street, Jersey City, NJ 07302-4496  
 Tel: 201-432-0463  
 Fax: 201-432-9542  
 E-Mail: BelFuse@belfuse.com  
 Internet: http://www.belfuse.com

### Far East Office

**Bel Fuse Ltd.**  
 8F/8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel: 852-2328-5515  
 Fax: 852-2352-3706

### European Office

**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Preston PR1 8UD  
 Lancashire, U.K.  
 Tel: 44-1772-556601  
 Fax: 44-1772-888366