


Surface Mount Transformers/Inductors, Gapped and Ungapped Custom Configurations Available


ELECTRICAL SPECIFICATIONS

(Multiple winds are connected in parallel)





Inductance Range: 10 μ H to 68 000 μ H, measured at 0.10 V RMS at 10 kHz without DC current, using an HP 4263A or HP 4284A impedance analyzer

DC Resistance Range: 0.03 Ω to 24.1 Ω , measured at + 25 °C \pm 5 °C

Rated Current Range: 2.29 amps to 0.07 amps

Dielectric Withstanding Voltage: 500 V RMS, 60 Hz, 5 seconds

**RoHS
COMPLIANT**
DIMENSIONS in inches [millimeters]

Pad Layout

Dimensional Outline

Foot print Diagram
NOTE: Pad layout guidelines per MIL-STD-275E (printed wiring for electronic equipment).

 Tolerances: xx \pm 0.01" [\pm 0.25 mm]; xxx \pm 0.005" [\pm 0.12 mm]

The underside of these components contains metal and thus should not come in contact with active circuit traces.

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (μ H)	IND. TOL.	SCHEMATIC LETTER	DCR MAX. (Ohms)	MAX. RATED* DC CURRENT (Amps)	SATURATING CURRENT** (Amps)
Ungapped Models (A)						
LPE5047ER151NU	150	\pm 30 %	A	0.20	0.79	N/A
LPE5047ER221NU	220	\pm 30 %	A	0.24	0.72	N/A
LPE5047ER331NU	330	\pm 30 %	A	0.29	0.65	N/A
LPE5047ER471NU	470	\pm 30 %	A	0.35	0.59	N/A
LPE5047ER681NU	680	\pm 30 %	A	0.42	0.54	N/A
LPE5047ER102NU	1000	\pm 30 %	A	0.51	0.49	N/A
LPE5047ER152NU	1500	\pm 30 %	A	0.63	0.44	N/A
LPE5047ER222NU	2200	\pm 30 %	A	0.76	0.40	N/A
LPE5047ER332NU	3300	\pm 30 %	A	1.00	0.35	N/A
LPE5047ER472NU	4700	\pm 30 %	A	2.24	0.24	N/A
LPE5047ER682NU	6800	\pm 30 %	A	2.70	0.21	N/A
LPE5047ER103NU	10 000	\pm 30 %	A	3.27	0.19	N/A
LPE5047ER153NU	15 000	\pm 30 %	A	6.26	0.14	N/A
LPE5047ER223NU	22 000	\pm 30 %	A	7.58	0.13	N/A
LPE5047ER333NU	33 000	\pm 30 %	A	9.50	0.11	N/A
LPE5047ER473NU	47 000	\pm 30 %	A	18.5	0.08	N/A
LPE5047ER683NU	68 000	\pm 30 %	A	24.1	0.07	N/A
Gapped Models (B)						
LPE5047ER100MG	10	\pm 20 %	B	0.03	2.29	2.690
LPE5047ER150MG	15	\pm 20 %	B	0.04	2.07	2.230
LPE5047ER220MG	22	\pm 20 %	B	0.05	1.68	1.860
LPE5047ER330MG	33	\pm 20 %	C	0.09	1.35	1.540
LPE5047ER470MG	47	\pm 20 %	D	0.13	1.11	1.300
LPE5047ER680MG	68	\pm 20 %	D	0.15	1.01	1.085
LPE5047ER101MG	100	\pm 20 %	D	0.24	0.81	0.900
LPE5047ER151MG	150	\pm 20 %	D	0.37	0.65	0.740
LPE5047ER221MG	220	\pm 20 %	E	0.55	0.53	0.610
LPE5047ER331MG	330	\pm 20 %	E	0.85	0.43	0.500
LPE5047ER471MG	470	\pm 20 %	E	1.29	0.35	0.420
LPE5047ER681MG	680	\pm 20 %	E	1.96	0.28	0.350
LPE5047ER102MG	1000	\pm 20 %	E	2.38	0.26	0.290
LPE5047ER152MG	1500	\pm 20 %	E	3.66	0.21	0.240
LPE5047ER222MG	2200	\pm 20 %	E	5.47	0.17	0.195
LPE5047ER332MG	3300	\pm 20 %	E	8.48	0.14	0.160
LPE5047ER472MG	4700	\pm 20 %	E	13.2	0.11	0.135

* DC current that will create a maximum temperature rise of 30 °C when applied at + 25 °C ambient. ** DC current that will typically reduce the initial inductance by 20 %

UNGAPPED MODELS: Highest possible inductance with the lowest DCR and highest Q capability. Beneficial in filter, impedance matching and line coupling devices.

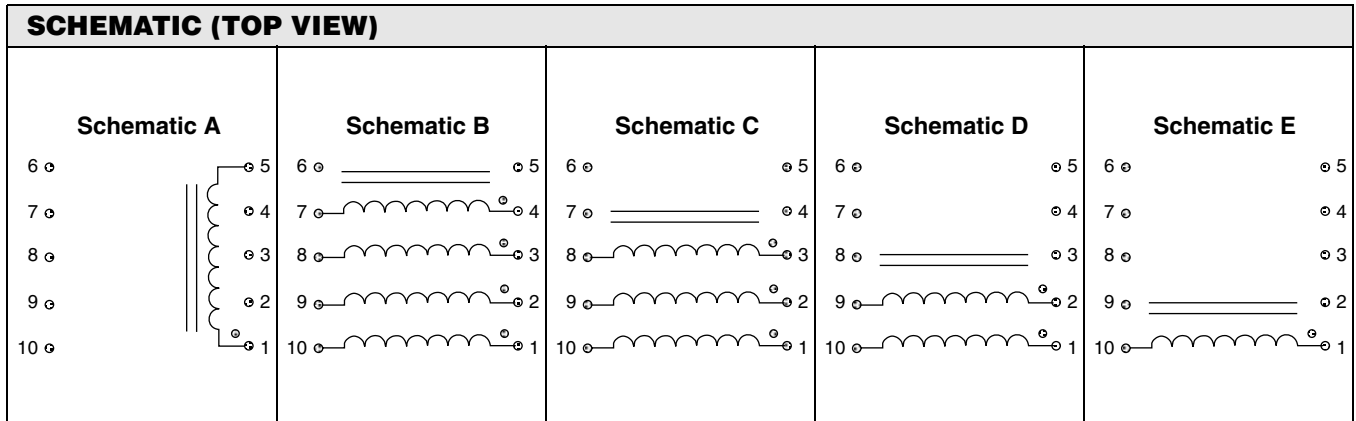
GAPPED MODELS: Capable of handling large amounts of DC current, tighter inductance tolerance with better temperature stability than ungapped models. Beneficial in DC to DC converters or other circuits carrying DC currents or requiring inductance stability over a temperature range.

DESCRIPTION

LPE	5047	1000 μ H	\pm 30 %	A	ER	e2
MODEL	SIZE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	CORE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER


NOTE Series is also available with SnPb terminations by using package code RY for tape and reel (in place of ER) or SM for bulk (in place of EB).



NOTE: Schematic A is for Ungapped LPE Series

ENVIRONMENTAL PERFORMANCE	
TEST	CONDITIONS
Thermal Cycling	Withstands - 55 °C to + 125 °C
Operating Temperature	- 55 °C to + 125 °C*
High Humidity	85 %
Soldering Heat	Tested to + 230 °C
Mechanical Shock	Per MIL-STD-202, Method 213 (100G)
Vibration	Per MIL-STD-202, Method 204 (20G)
Solderability	Per industry standards

* Must be checked in end use application

PART MARKING
<ul style="list-style-type: none"> - Vishay Dale - Date code - Marking code (Suffix of model #) - Pin 1 indicator

PACKAGING									
<p>TAPE SPECIFICATIONS: Carrier Tape Type: Conductive Cover Tape Type: Anti-static Cover Tape Adhesion to Carrier: 40 ± 30 grams</p> <p>REEL SPECIFICATIONS: Diameter (flange): 13" [330.2 mm] Maximum Width (over flanges): 1.197" [30.4 mm]</p> <p>Tape and Reel Orientation</p>	<p>STANDARDS: All embossed carrier tape packaging will be accomplished in compliance with latest revision of EIA-481 "Taping of Surface Mount Components for Automatic Placement".</p> <table border="1"> <thead> <tr> <th>MODEL</th> <th>TAPE WIDTH</th> <th>COMPONENT PITCH</th> <th>UNITS PER 13 INCH REEL</th> </tr> </thead> <tbody> <tr> <td>LPE-5047</td> <td>24 mm</td> <td>16 mm</td> <td>600</td> </tr> </tbody> </table>	MODEL	TAPE WIDTH	COMPONENT PITCH	UNITS PER 13 INCH REEL	LPE-5047	24 mm	16 mm	600
MODEL	TAPE WIDTH	COMPONENT PITCH	UNITS PER 13 INCH REEL						
LPE-5047	24 mm	16 mm	600						

NOTE: Top view shown with cover tape removed



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.