
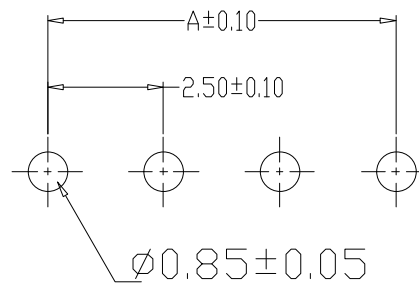


**SPECIFICATIONS**

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0  
PIN Brass Tin-plated

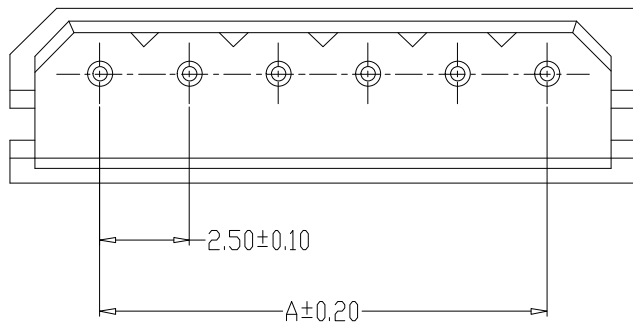

**PCB LAYOUT**

编 号	尺寸 (mm)	
	A	B
HC-5264-2A	2.50	7.50
HC-5264-3A	5.00	10.00
HC-5264-4A	7.50	12.50
HC-5264-5A	10.00	15.00
HC-5264-6A	12.50	17.50
HC-5264-7A	15.00	20.00
HC-5264-8A	17.50	22.50
HC-5264-9A	20.00	25.00
HC-5264-10A	22.50	27.50
HC-5264-11A	25.00	30.00
HC-5264-12A	27.50	32.50
	47.50	52.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	钱岳生		料号 PART NO.	HC-5264-NA		版本 REV.	A		
			X.±0.25	X.*±2°		审核 CHECK	2013、07、01		品名 TITLE	5264直针		页次 SHEET	1/1	
			.X±0.20	.X*±1°			2013、07、03			客户料号 CUTML NO.			WAFER DIP TYPE	
			.XX±0.15	.XX*±0.5°			张名							
			.XXX±0.10	.XXX*±0.5°	核准 APPROVAL	2013、07、05	张名							
					单位 UNITS	MM	比例 SCALE	1:1	深圳市华灿天禄电子有限公司					