


EPB5212S

- Designed for Home Phone Line Networks
- Withstands IR reflow Profile Processes
- Complies with UL1950 & UL60950
Supplementary Insulation
- Hipot : 1500 Vrms Min. (1 minute)


Electrical Parameters @ 25° C

OCL (μ H Min.)			Leakage Inductance (μ H Max.)			Interwinding Capacitance (pF Typ.)			DCR (Ω Max.)		
@ 10 KHz , 0.1 Vrms			@ 100 KHz, 0.1 Vrms			@ 100 KHz, 0.1 Vrms					
30	270	67.5	1	6	3	10	25	15	0.23	0.80	0.46
Pins 1-2	Pins 3-4	Pins 8-5	Pins 1-2 short others	Pins 3-4 short others	Pins 8-5 short others	Pins 1-2 to 8-5	Pins 3-4 to 8-5	Pins 1-2 to 3-4	Pins 1-2	Pins 3-4	Pins 3-4

Schematic

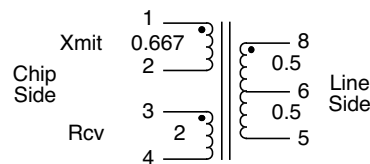

Package

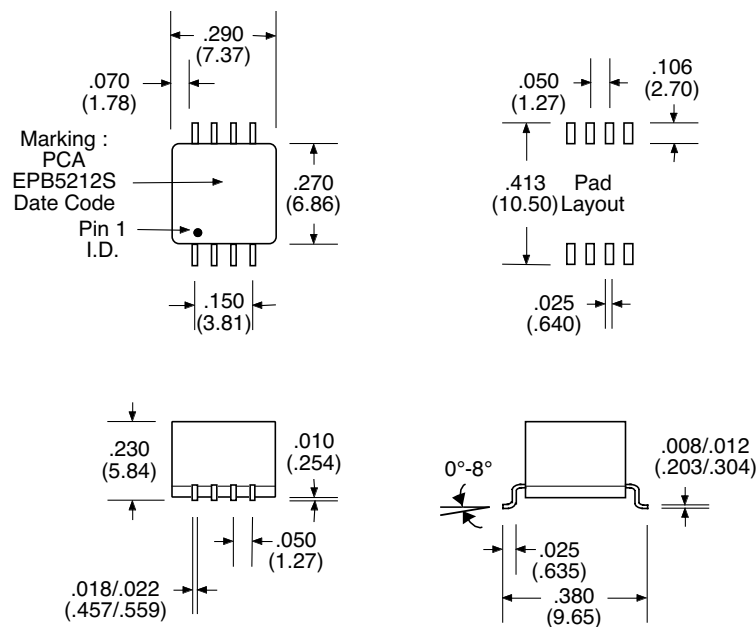

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$