


## TERMINAL BLOCKS



## 3.5mm + 3.81mm PITCH - SCREWLESS

- 3.5mm and 3.81mm pitch
- Interlocking
- 45 degree cable entry
- 1.5mm<sup>2</sup> wire acceptance

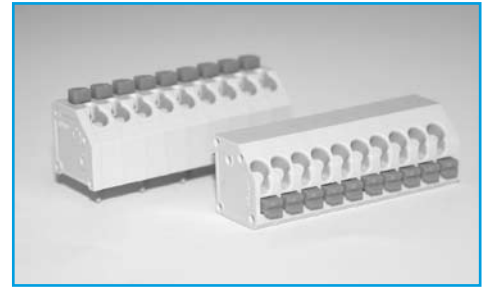


### SPECIFICATION

**Rating:** 4A/450V (300V UL) 7  
**Dielectric Strength:** ≥2.5KV/60sec  
**Insulation Resistance:** ≥5MΩ  
**Working temperature:** -20°C to +110°C  
**Moulding:** Grey UL94V-0 flame retardant PA68  
**Pin/terminal:** 5μ tinned, nickel plated brass

**Recommended PCB hole size:** ø1mm

### OUTLINE DRAWING

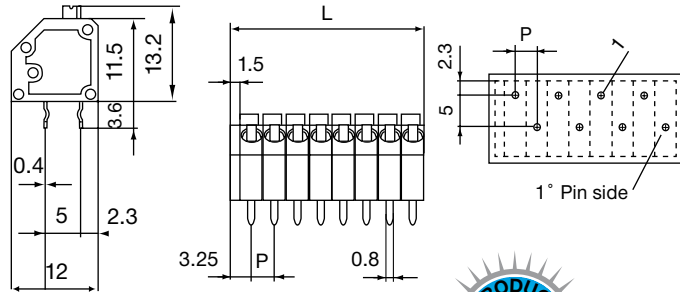

### ORDERING INFORMATION

DBC	TB	70	/2
Dubilier Connectors	Series Terminal Block	Style 70 = 3.5mm 77 = 3.81mm	N° of Ways 2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			

## TERMINAL BLOCKS



## 5.08mm PITCH - SCREWLESS

- 5.08mm pitch
- UL approved
- 2-7 pole solid block
- Flame retardant material
- 0.3 to 1.5mm<sup>2</sup> wire acceptance




### SPECIFICATION

**Rating:** 12A/250V  
**Dielectric Strength:** ≥4KV/60sec  
**Insulation Resistance:** ≥5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°C  
**Moulding:** UL94V-0 flame retardant PA66  
**Pin/terminal:** 5μ tinned, phosphor bronze

**Spring:** Zinc plated steel  
**Recommended PCB hole size:** ø1.1mm

### OUTLINE DRAWING

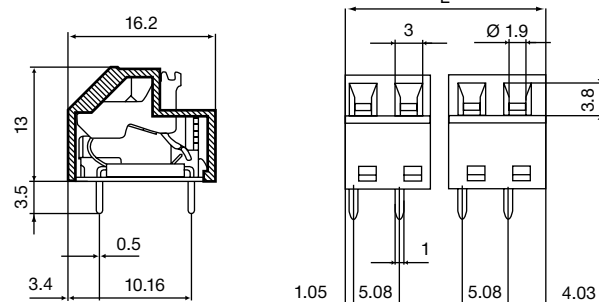

### ORDERING INFORMATION

DBC	TB	41	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways