


FA24C0G2W222JNU00



Applications	Automotive Grade
Feature	Mid Mid Voltage (100 to 630V) Halogen-free Halogen-free AEC-Q200 AEC-Q200
Series	FA
Status	Production



Dimensions in mm

Size	
Length(L)	4.50mm Max.
Width(W)	5.50mm Max.
Thickness(T)	3.00mm Max.
Lead Gap(F)	5.00mm ±1.00mm
Lead Diameter(d)	0.50mm +0.10,-0.03mm

Electrical Characteristics	
Capacitance	2.2nF ±5%
Rated Voltage	450VDC
Withstanding Voltage	675VDC
Temperature Characteristic	C0G(0±30ppm/°C)
Q (Min.)	1000
Insulation Resistance (Min.)	10000MΩ





Other	
Soldering Method	Wave (Flow)
	Iron Soldering
Lead Length / Package Type	7mm for Bulk
AEC-Q200	Yes
Package Quantity	500pcs

! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.

FA24C0G2W222JNU00



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

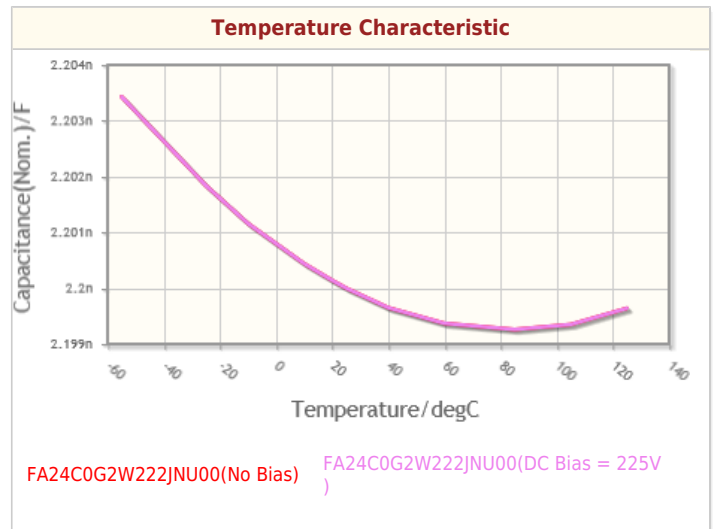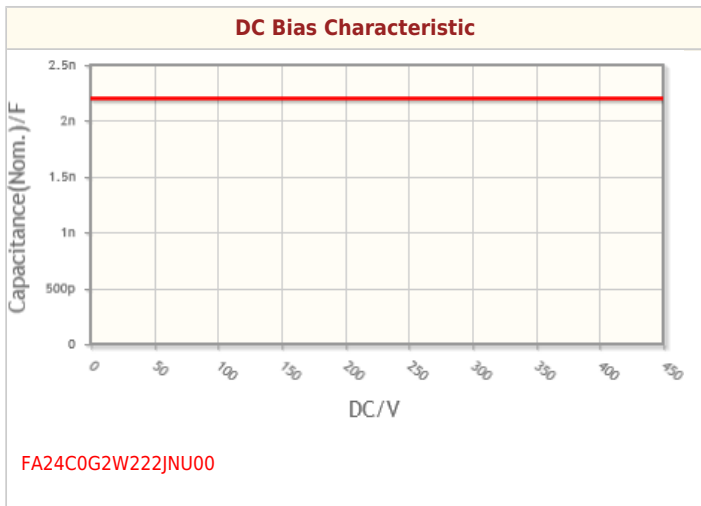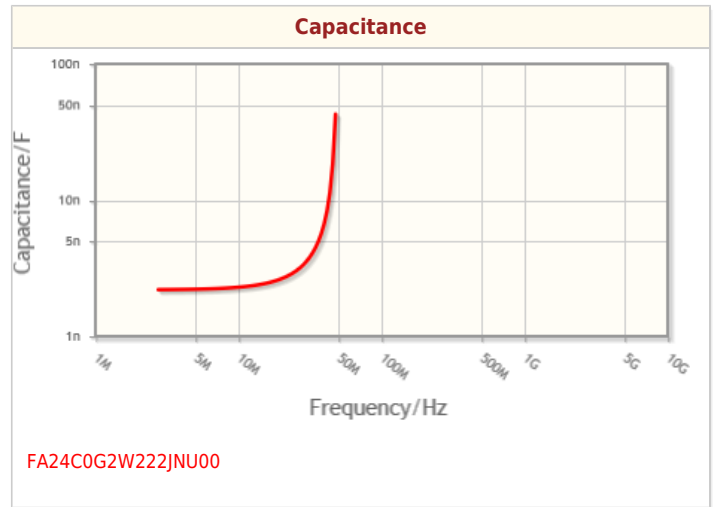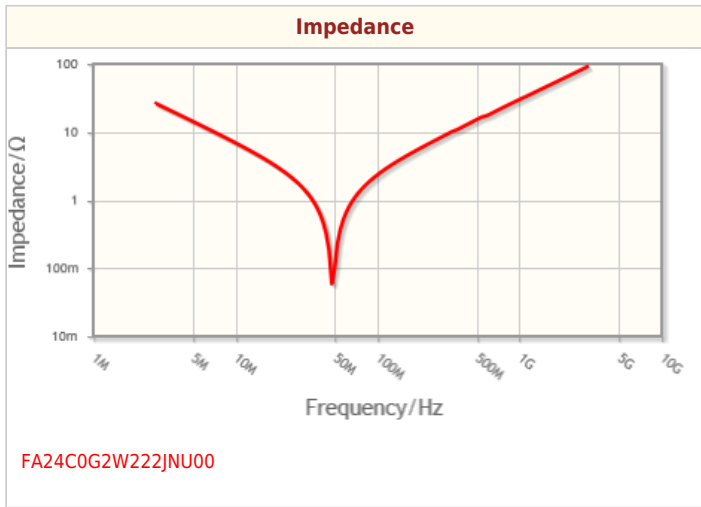

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.