
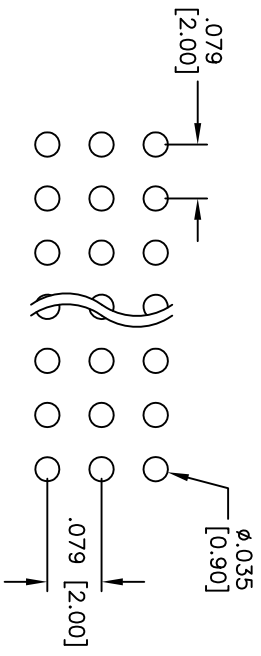




Rev	AWO #	Description	Date	Appr
-	10407	RELEASED	8/24/10	

APPROVED: _____

DATE: _____ TITLE: _____

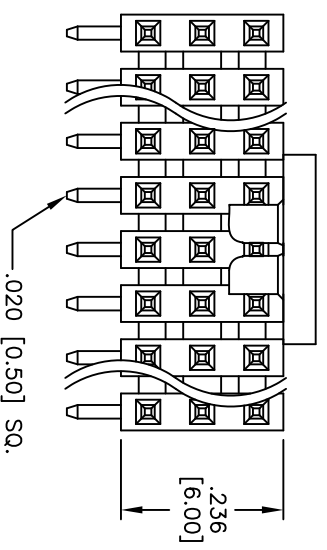

RECOMMENDED PCB LAYOUT

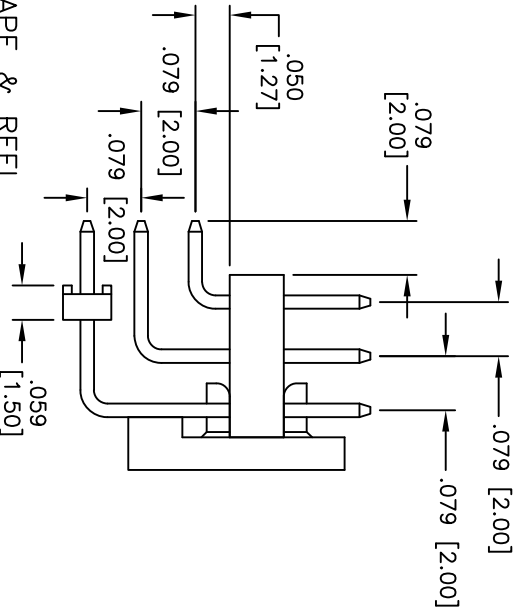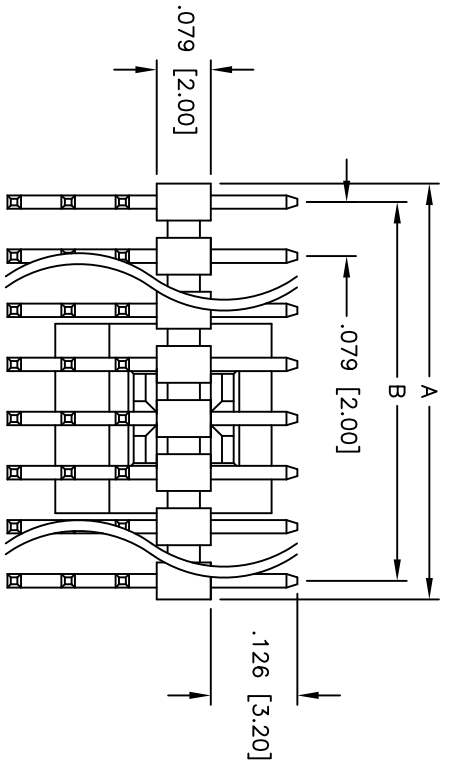

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating: Matt Tin over Nickel underplate overall

Electrical:
 Current rating: 2 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC

Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 9 thru 120
 A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	8/24/10
CHECKED AH	8/24/10
APPROVED	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .079 [2.00] TRIPLE ROW PIN HEADER
 RIGHT ANGLE, SURFACE MOUNT

SIZE	PART NO.	REV.
X	2PH3RA-XX-MT-A10407-1-PP-T/R	-
REF: S00032T	SCALE: NTS	SHEET 1 OF 1