


## SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)

Nominal Capacity (At 5mA/20°C/68°F/2.0V Cut-Off)	19 Ah
Open Circuit Voltage (At 20°C/68°F)	3.67 V
Nominal Voltage (At 5mA/20°C/68°F)	3.6 V
Maximum Continuous Current	230 mA
Maximum Pulse Current Capability	500 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	97 g (3.42 oz)
Anode Surface Area	40 cm <sup>2</sup>
Volume	51 cm <sup>3</sup>
Diameter (Max)	33.6 mm
Height (Max)	60 mm




DIMENSIONS IN MM

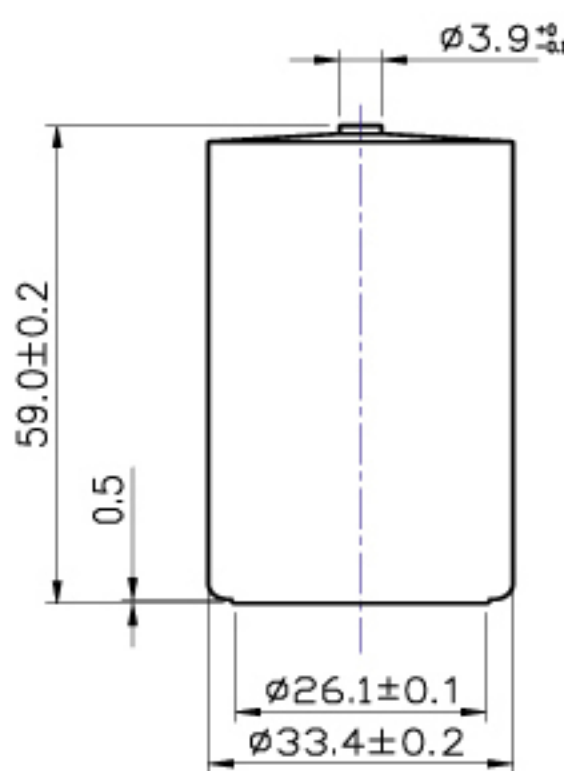


**WARNING**  
 Fire, Explosion And Severe Burn Hazard.  
 Do Not Recharge, Crush, Disassemble,  
 Heat Above 212°F(100°C), Incinerate  
 Or Expose Contents To Water


DISCHARGE CHARACTERISTICS AT +20°C

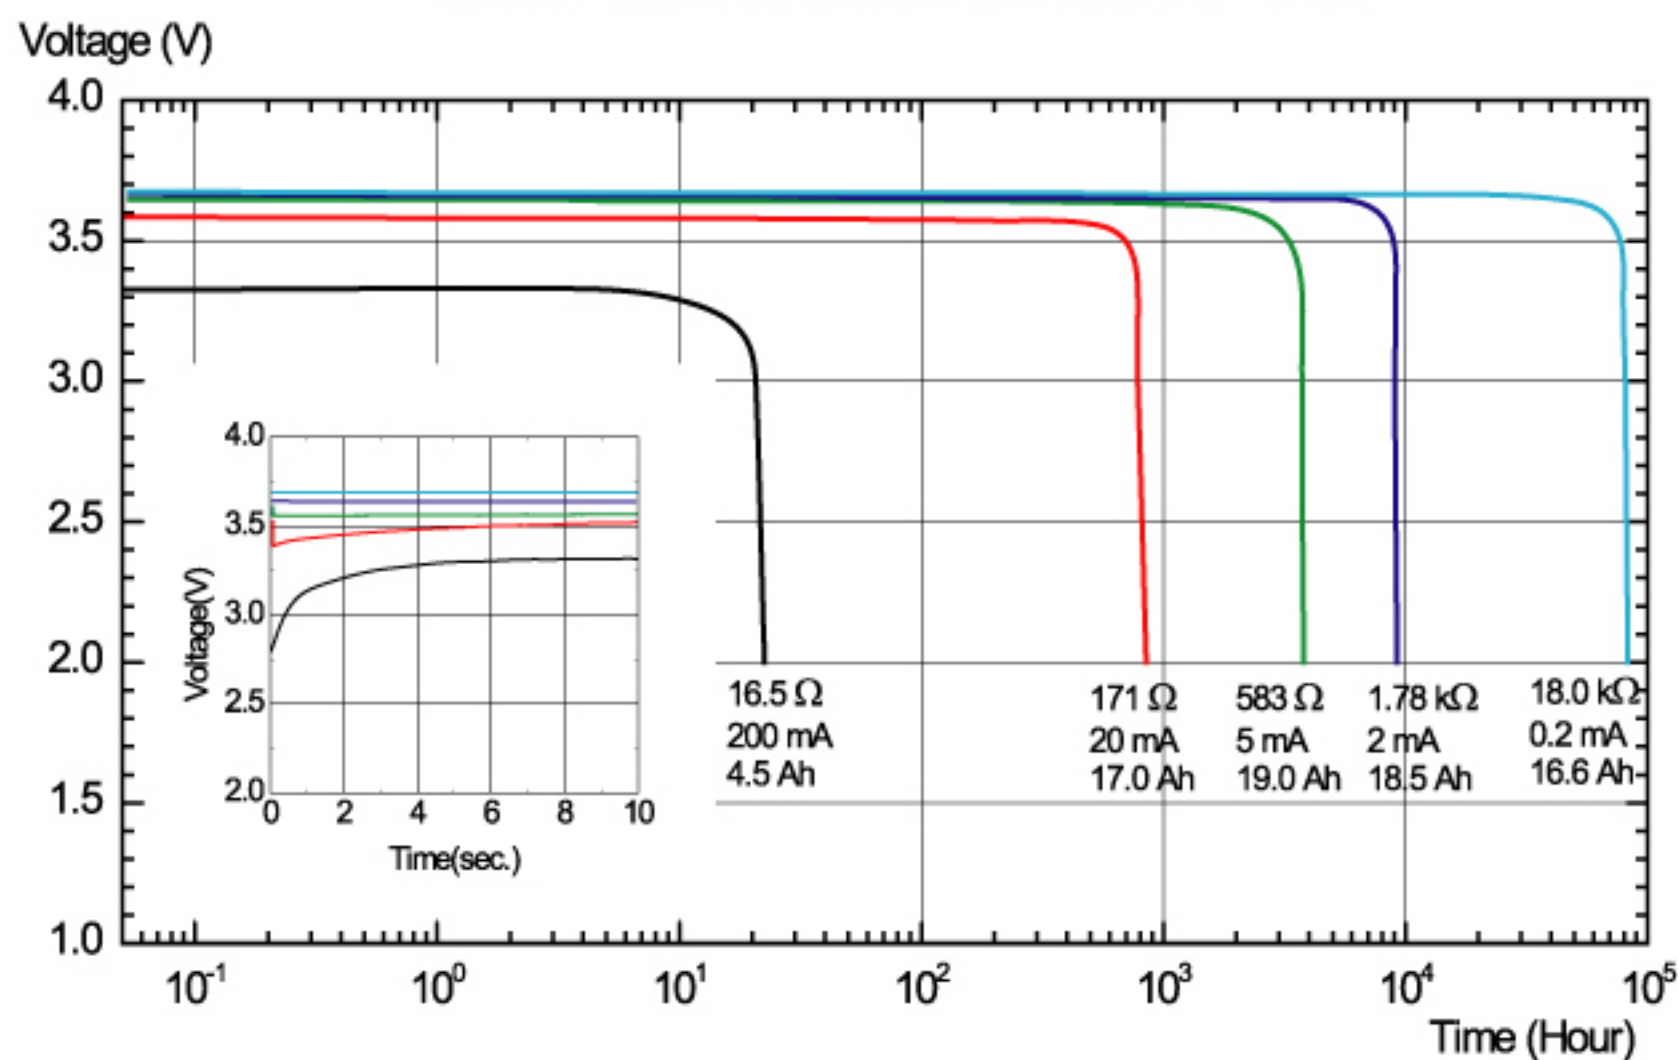

CAPACITY vs. CURRENT

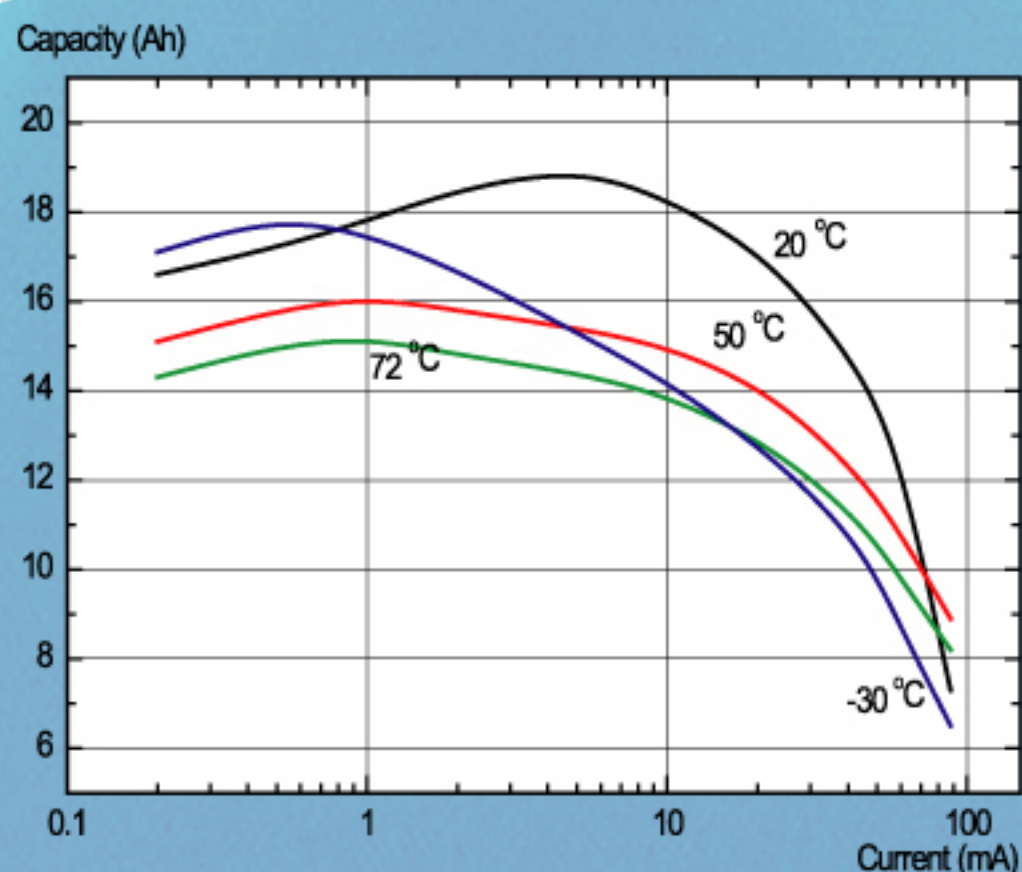

OPERATING VOLTAGE

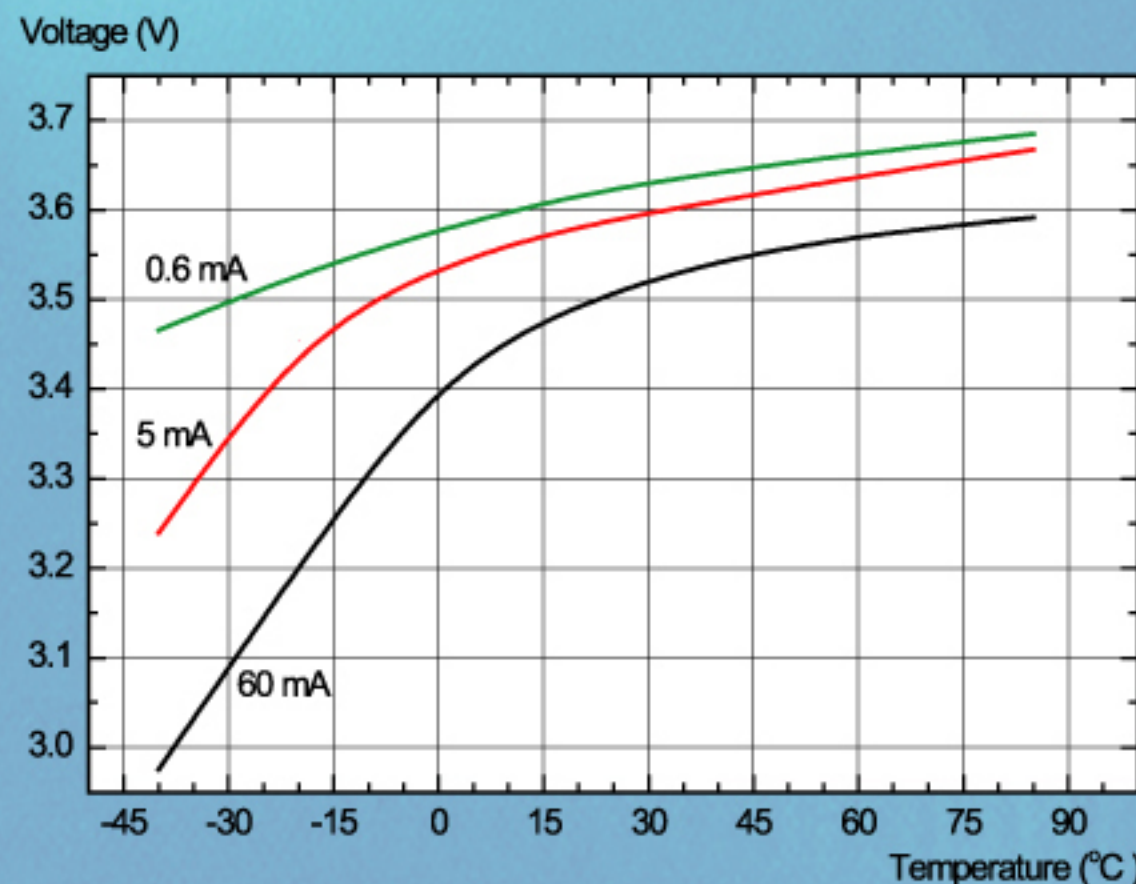


Any values in product catalogues are for informational purposes only.  
 They can also differ from actual conditions of usage and are not warranties of future performance.



# XenoEnergy Lithium Battery

## Terminals

(Unit : mm)

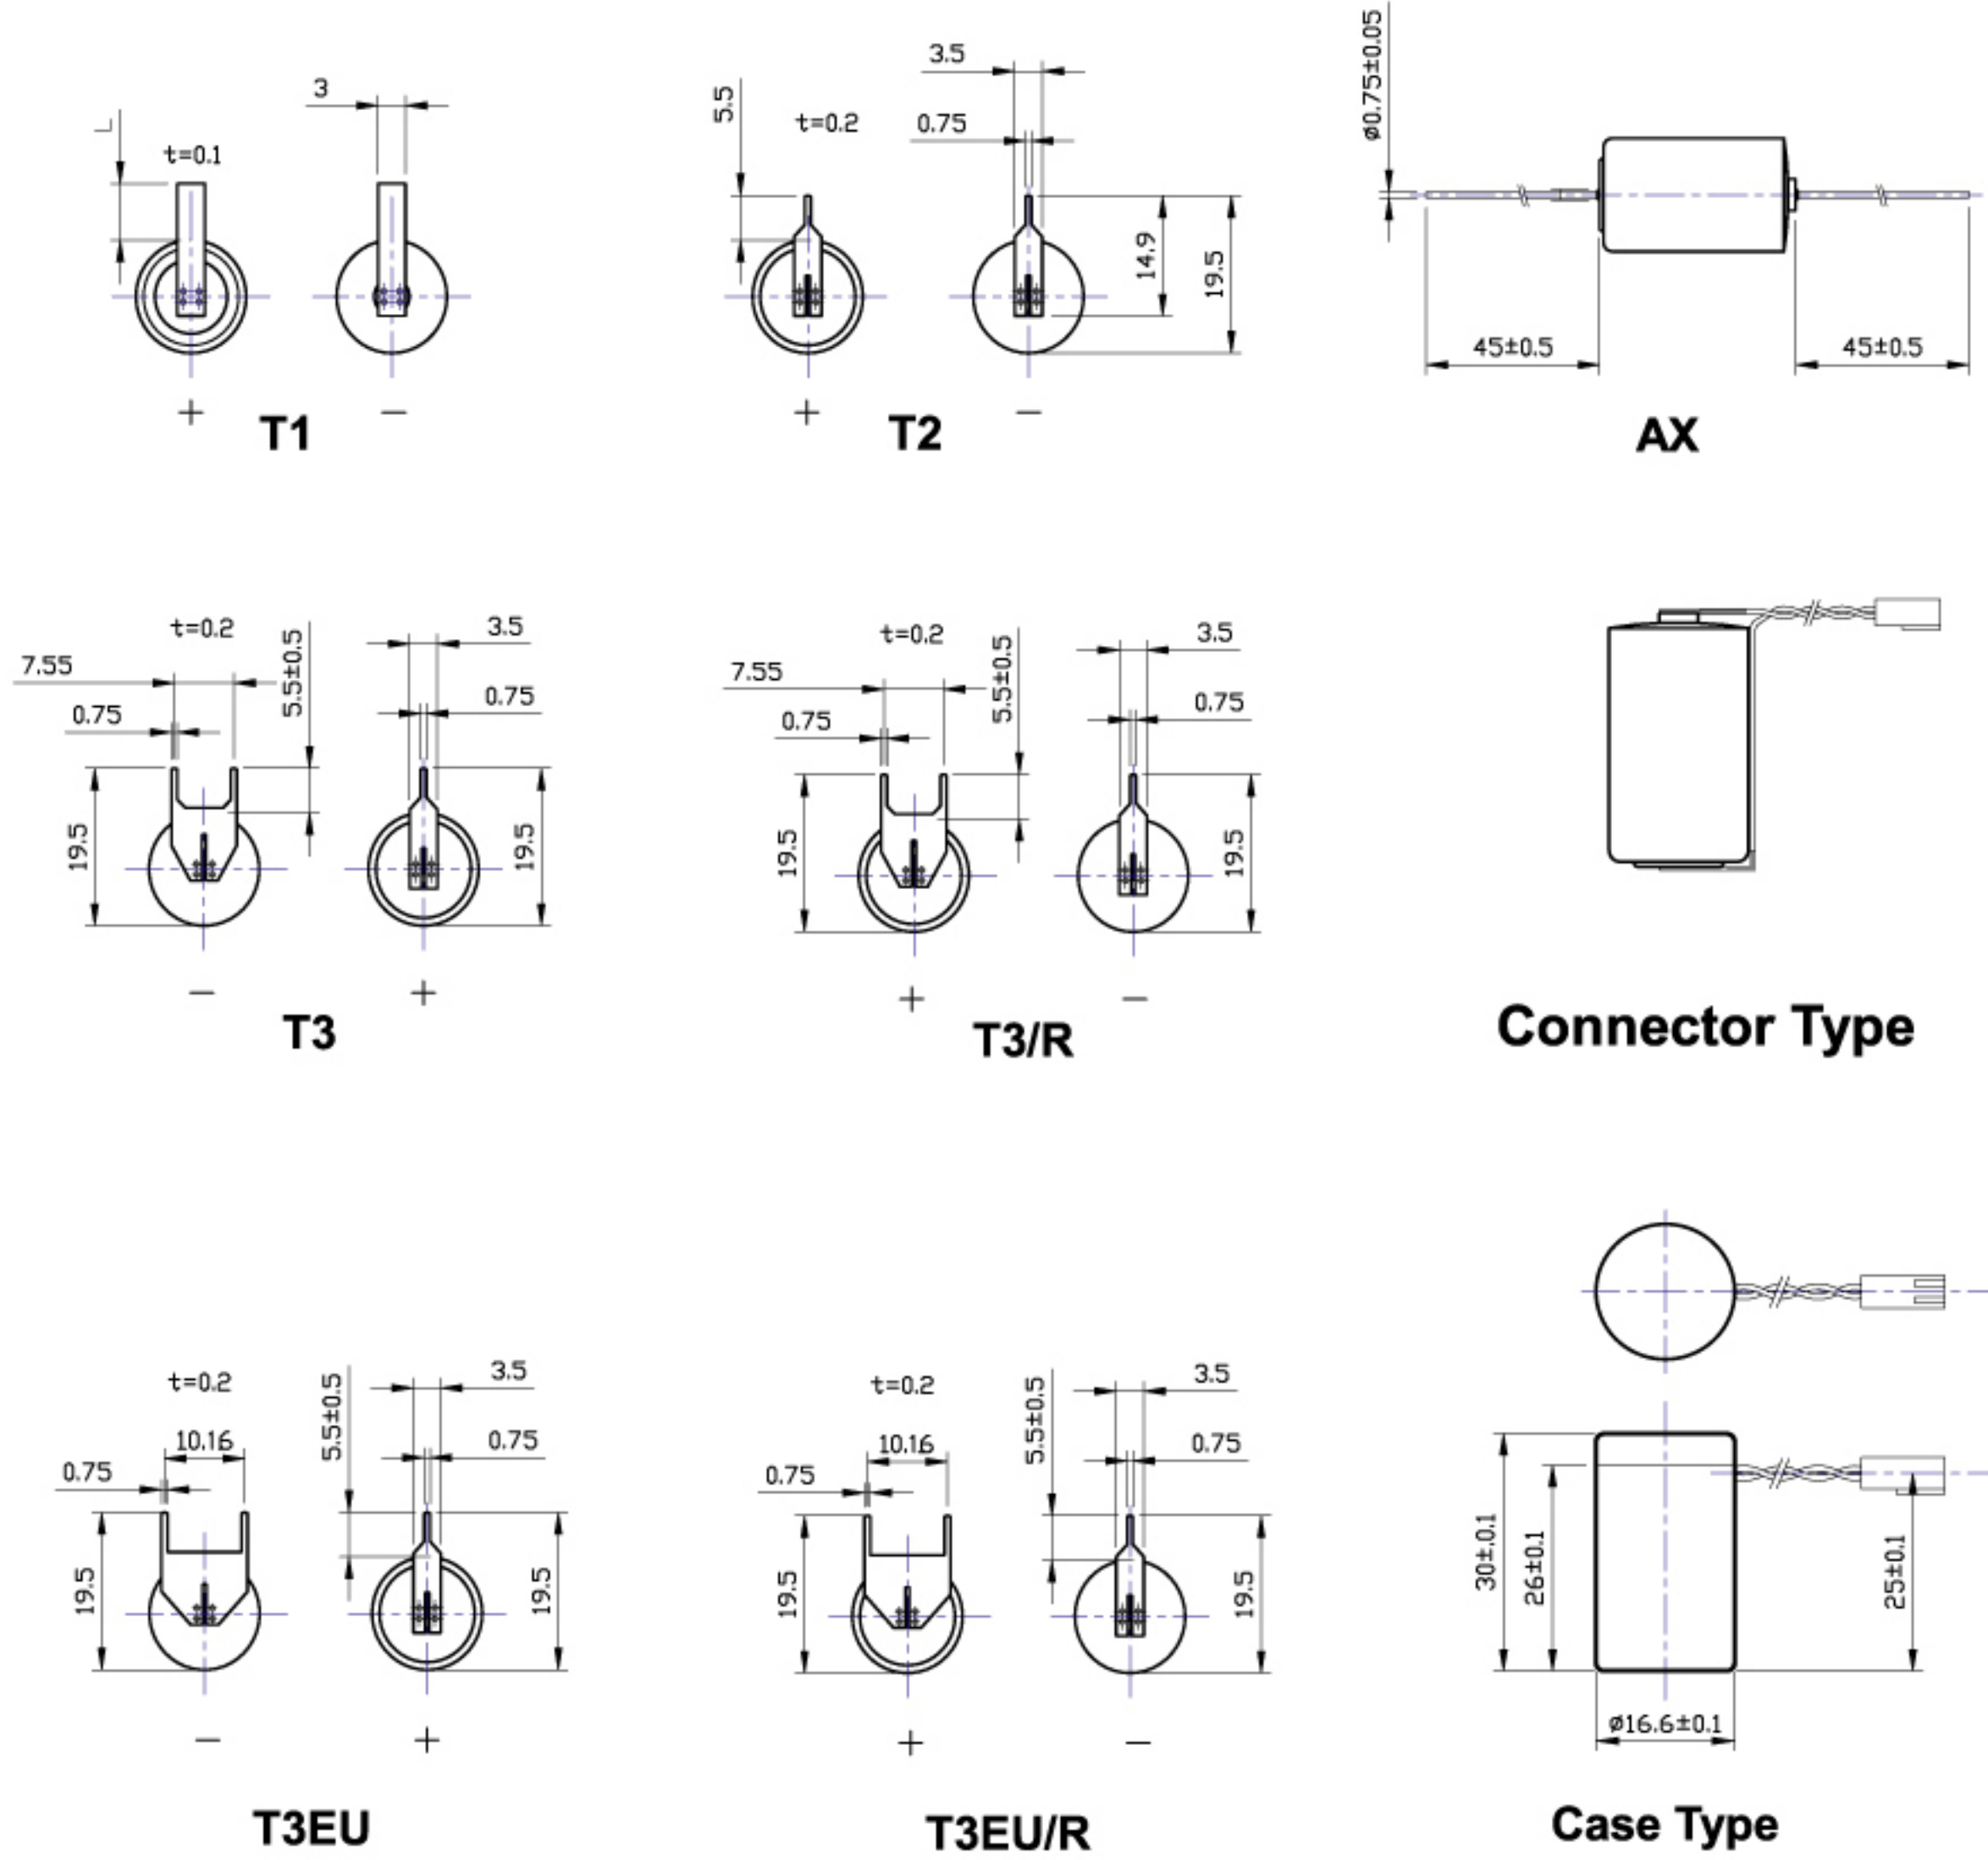

Model	T1/L(mm)	T2	T3 & T3/R	T3EU & T3EU/R	AX	Connector Type	Case Type
XL-050F	○/(7±0.5)	○	○	○	○	○	○
XL-050H	○/(7±0.5)	○	○	○	○	○	○
XL-055F	○/(7±0.5)	○	○	○	○	○	○
XL-060F	○/(7±0.5)	○	○	○	○	○	○
XL-060H	○/(7±0.5)	○	○	○	○	○	○
XL-140F	○/(16±1)				○	○	
XL-145F	○/(16±1)				○	○	
XL-200F	○/(16±1)				○	○	
XL-205F	○/(16±1)				○	○	
XL-210F					○		