FEATURES

6U x 12TE x 220 mm
INPUT : 230Vac 50Hz
OUTPUT : up to 400W max.
Up to 6 outputs fully isolated
Efficiency : 76% typ.



APPLICATIONS

Industrial / Transportation.

INPUT

Voltage range : 180-265Vac 47-63Hz

Nominal : 230Vac

Input protection : fuse
transient and surges protected

OUTPUT

Voltage : V1, V2 : 3V3, 5V, 12V, 15V, 24V, 28V, 48V
V3 : -3V3, -5V, -12V, -15V, -24V, -28V, -48V
V4, V5 : 3V3, 5V, 12V, 15V, 24V, 28V, 48V
V6 : -3V3, -5V, -12V, -15V, -24V, -28V, -48V

	OUTPUT		Conditions
	Typ.	Max.	
Line regulation	0,02 %	0,2 %	Low line to high line ; full load
Load regulation	0,02 %	0,5 %	No load to full load
Ripple and noise	0,5 %	1 %	Peak to peak, nom. Input ; full load
Current limit	115 % of I out max.	140 % of I out max.	Vout = 95% of nominal ; Automatic restart
Short circuit current	115 % of I out max.	140 % of I out max.	Vout < 250mV ; Automatic restart

SIGNALS

AC Fail : Led front panel

ENVIRONMENTAL

Storage temperature :	-25°C to +100°C
Operating temperature :	-10°C to +65°C ambiant, forced air, Nominal Power


ISOLATION

Input to chassis :	1500 Vrms or 2120 Vdc
Input to Output :	3000 Vrms or 4242 Vdc
Output to Chassis :	>10 Mohms at 500 Vdc

GENERAL

Safety :	**built to meet EN60950**
EMI :	**built to meet EN55022B**

MECHANICALS

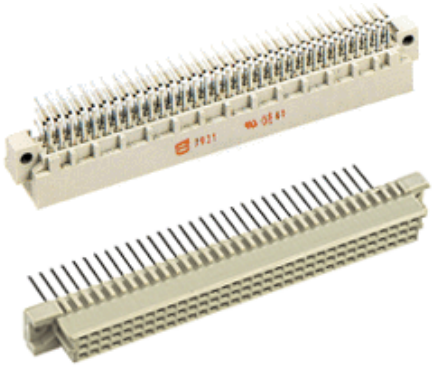

DIN 41612 form C/2



OUTPUT : CN2 - CONNECTOR 1/2 DIN FORM C/2

PIN	DESCRIPTION
A1 B1 C1 to A5 B5 C5	+ V1
A13 B13 C13 A14 B14 C14	+ V2
A15 B15 C15 A16 B16 C16	- V3
A1 B1 C1 to A5 B5 C5	Common V1, V2, V3

INPUT : CN1 - CEE22


PIN	DESCRIPTION
1	AC/L
2	AC/N
3	GROUND

OUPTUT : CN3 - CONNECTOR 1/2 DIN FORM C/2

PIN	DESCRIPTION
A1 B1 C1 to A5 B5 C5	+ V4
A13 B13 C13 A14 B14 C14	+ V5
A15 B15 C15 A16 B16 C16	- V6
A1 B1 C1 to A5 B5 C5	Common V4, V5, V6

HOW TO ORDER ?

Just fill in.
Pmax : 400W

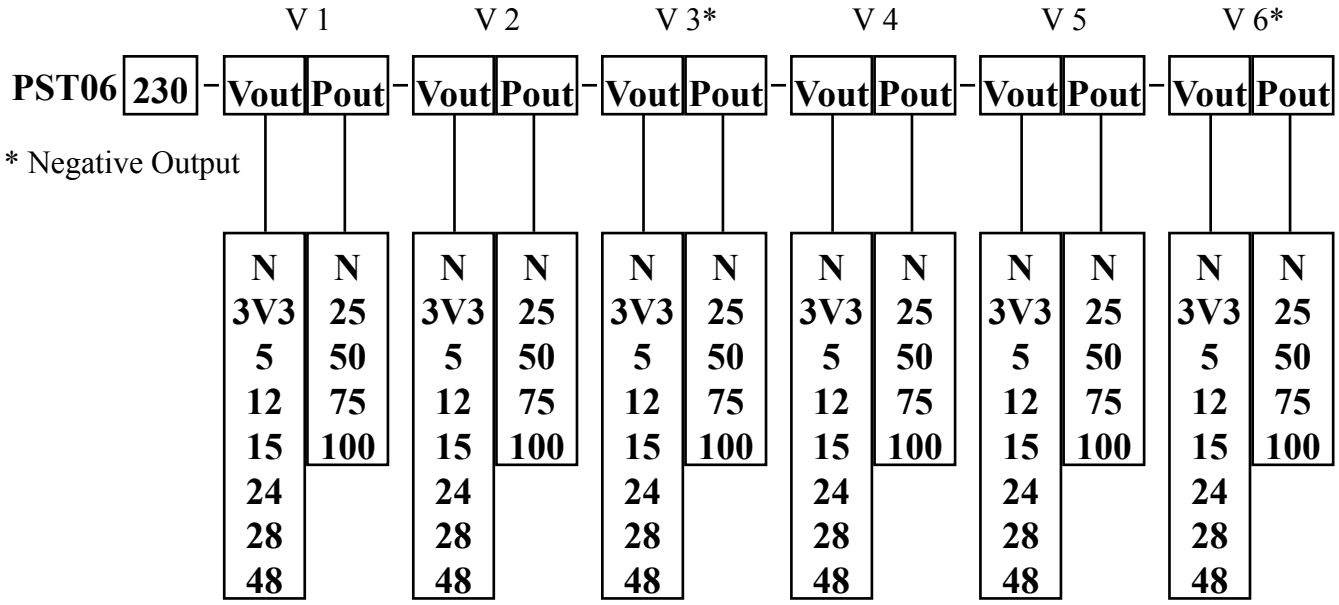

COMPANY NAME :

ADDRESS :

NAME : JOB TITLE :

QUANTITY : DELIVERY DATE :

INFORMATION :

SEND TO :

POWER SYSTEM TECHNOLOGY
19, 21 rue Gustave Eiffel - Bâtiment A2
28630 GELLAINVILLE - FRANCE
Tel. : +33 (0) 2 37 30 78 40 - Fax : +33 (0) 2 37 30 77 71
Email : sales@powersystemtechnology.com