P/N:FB2022M DATA SHEET

Feature




- Designed for transmit/receiver Filter.
- Operating temperature range : -40℃ to +85℃.
- Storage temperature range: -40℃ to +125℃.


Electrical Specifications @ 25°C				
Part Number	Turns Ratio		CUT-OFF Frequency	HI-POT (Vrms)
	TX	RX		
FB2022M	1CT:1CT	1CT:1CT	17 MHz ± 1.5MHz	1500

Continue						
Part Number	Insertion Loss TX/RX (dB Max)	Attenuation TX/RX (dB Min)			Return Loss (dB Min)	Cross talk Attenuation (dB Min)
	1–10MHz	20MHz	30MHz	40MHz	1-12MHz	1-10 MHz
FB2022M	-1.0	-6.8/-4.2	-27/-20	-32/-32	-13.5	-30

Schematic

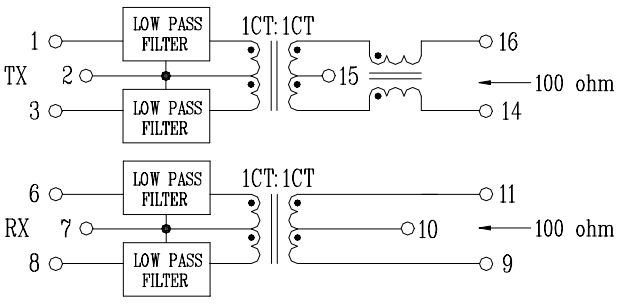

Mechanical

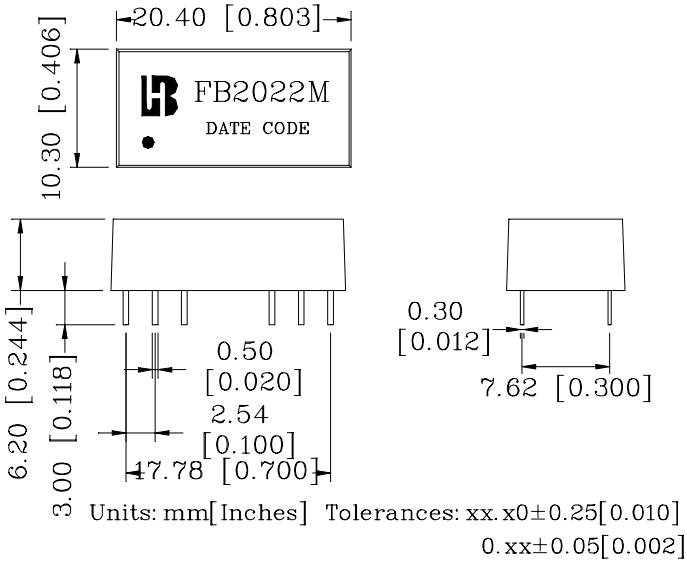

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434