Features

- Applies to American, Canadian and German applications.


Safety Agency : Standard		File No.
UL	: UL-1414	E47474
CSA	: CSA C22.2 No.0, No.1	LR37404/LR68886
VDE	: IEC60384-14Ⅱ, EN132400	128473(XA Series)

Applications

- Suppressing noise occuring Automatic machines and Office appliances.





XA Series

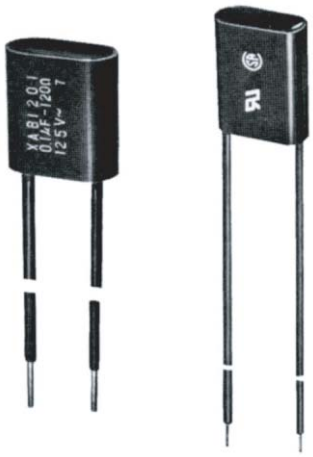


XAB Series

Dimensions

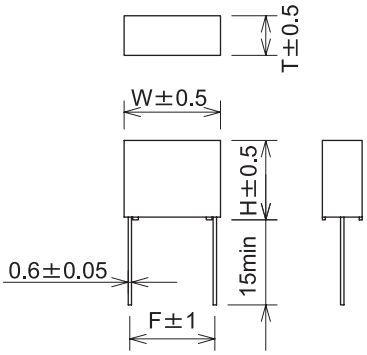

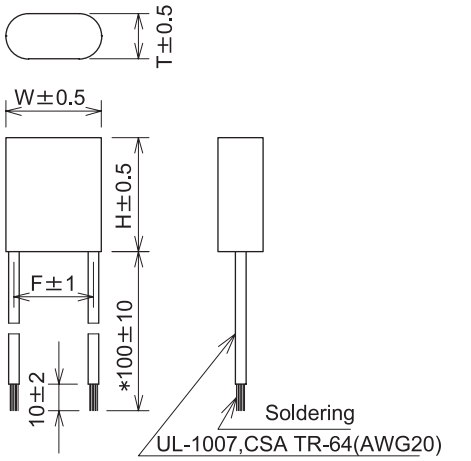

Circuit



*200 & 300 available

Unit: mm

Electrical Specifications

Rated Voltage 125VAC(UL, CSA), 250VAC(VDE)

Safety Agency	Class	Model Number	Capacitance μF ±20%	Resistance Ω ±30%	Dimension W	H	T	F	Pulse condition (Max.) Peak to peak	Pulse width Max.	Repetitive frequency	Pulse width (sec) x Frequency (Hz)	Peak Pulse Voltage	Test Voltage	Insulation Resistance
	X 2	XA120033	0.033	120(1/4W)	17.0	14.0	7.0	15.0	700V max	20msec.	120(60)Hzmax	3(0.8)max	700V	Line to Line 1200Vrms 50/60Hz 2~5sec Line to Case 2000Vrms 50/60Hz 60sec	Line to Line 15,000MΩmin Line to Case 100,000MΩmin (at 500VDC)
		XA1201	0.1		20.0	16.5	8.5	17.5		50msec.					
		XAB1201	0.1		18.0	21.5		15.0			120Hz max	3max			
		XAB1202	0.2	120(1/2W)	19.0	23.0									

Operating Temperature: -40~+85℃