
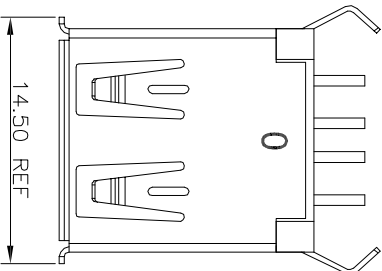
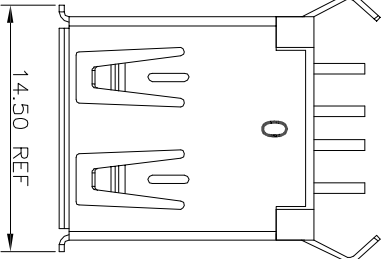
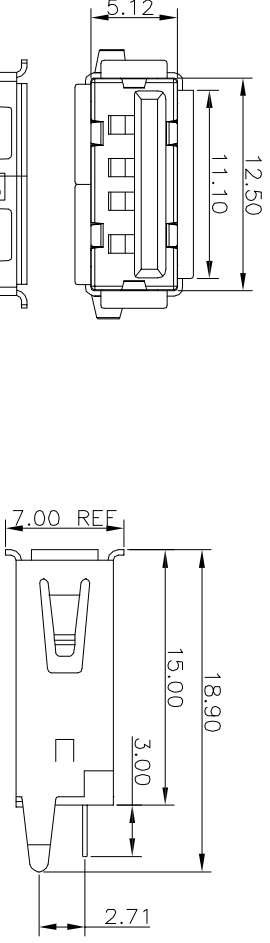
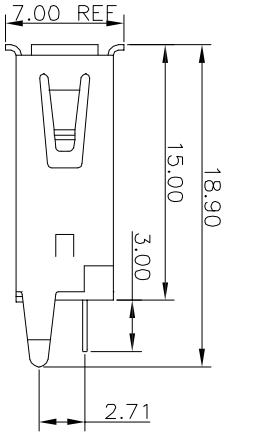
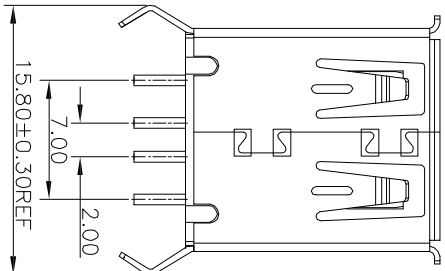
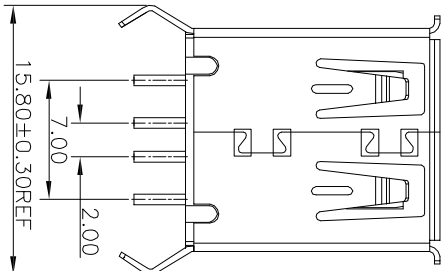


	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G	<p>ROHS compliant</p>							G
H	<p>1</p>							H

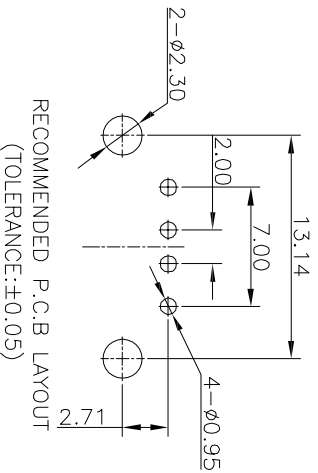

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

NOTES:

1. Material:
 - 1.1 Housing: PBT+30%GF UL94V-0, Color White
 - 1.2 Shell: SPCC
 - 1.3 Contact :Phosphor Bronze
2. FINISH:
 - 2.1 Contact Area: Selective 5u"Au
 - Solder Area: Tin Plated
 - Under: Ni Plated
3. MECHANICAL:
 - 3.1 Mating Force: 3.57kgf Max.
 - 3.2 Unmating Force: 1.02kgf Min
 - 3.3 Durability: 1500 cycles Min
4. ELECTRICAL:
 - 4.1 Current Rating: 1.5A
 - 4.2 Dielectric Strength: 500V AC FOR 1 MINUTE
 - 4.3 Contact Resistance: 30mΩ Max
 - 4.4 Insulation Resistance: 1000 MΩ Min
5. Operating temperature: -55°C TO +85°C
6. PACKAGING: Tray

Scale	Free					
TOLERANCE						
.X	±0.30					
.XX	±0.20					
.XXX	±0.10					
DIM	TOL	①	Update the P/N	11.12.2013	Winnie	
X.°	±5°					
Angle	TOL	②	Drawn	07.06.2013	Winnie	
UNIT	mm	Id.	Modification	Date	Name	



Customer-No.	
ASSMANN WSW-No.	①AUSB2-AFN-MTP1
Drawing-No.	ASS 5767 CO
Replace	rev01
	SHEET