

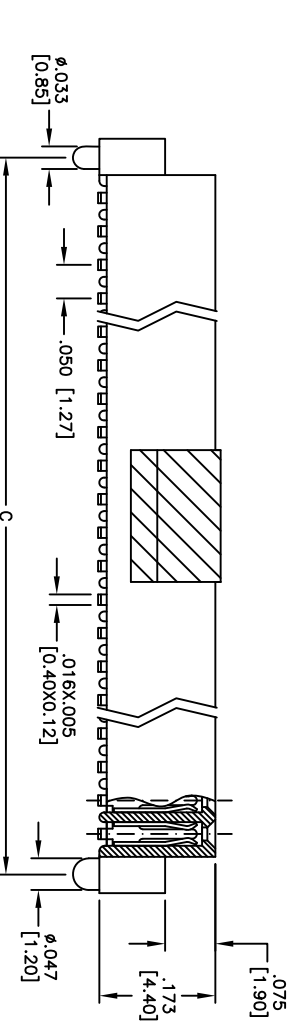
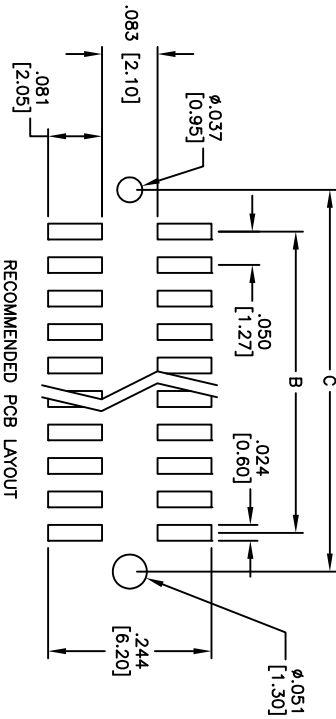


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/04/10	

APPROVED: _____
 DATE: _____ TITLE: _____

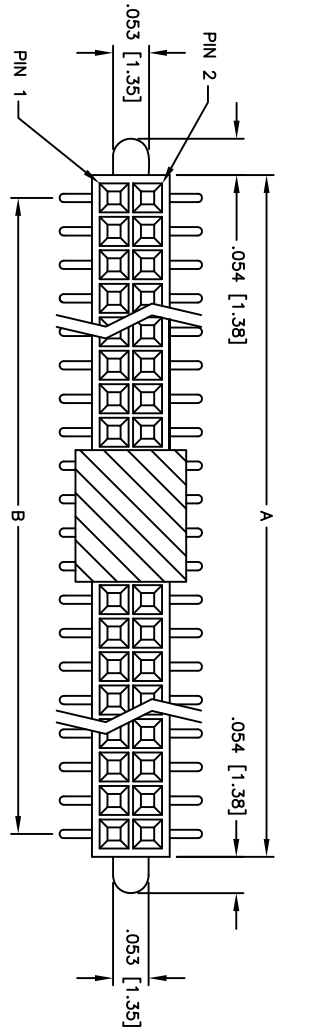

PACKAGED ON TAPE & REEL

Positions: 04 thru 100
 A = .050 [1.27] x No. of Positions per Row + .018 [0.46]
 B = .050 [1.27] x No. of Spaces
 C = .050 [1.27] x No. of Positions per Row + .070 [1.78]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 x .050 DUAL ROW RECEPTACLE STRIP
 SMT TYPE, END PEGS

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate on SMT tails.
 Gold flash over Nickel underplate on contact area.
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min.
 Dielectric voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS: _____ DATE: _____

DRAWN: DY 10/04/10
 CHECKED: _____
 APPROVED: _____

SIZE	PART NO.	REV.
X	HRS-2E-XX-SG-SMT-E-PP-1R	
REF: S00059T	SCALE: NTS	SHEET 1 OF 1