
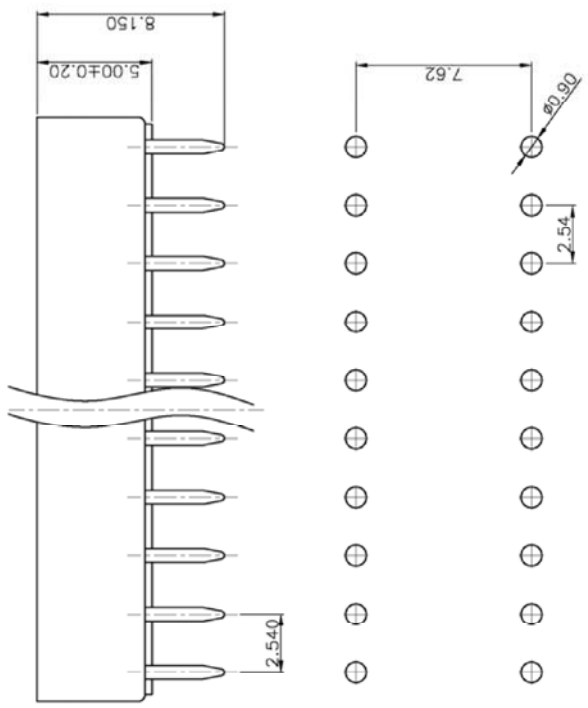


NOTES:  
 MATERIAL: CONTACTS: PHOSPHOR BRONZE  
 INSULATOR: PBT+30% GLASS UL 94V-0  
 ELECTRICAL:  
 CONTACT CURRENT RATING: 1A  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC  
 CONTACT RESISTANCE: 20 milliohms max  
 INSULATION RESISTANCE: 1000 MEGOHMS  
 CAPACITANCE: 0.5 PICO-FARAD MAXIMUM  
 TEMPERATURE RANGE: -40°C + 105°C  
 MECHANICAL:  
 ENGAGING FORCE: 340g/A CONTACT MAX.  
 SEPARATING FORCE: 20g/A CONTACT MIN.  
 DURABILITY: 50 CYCLES  
 NO. OF CONTACTS: 6-48  
 FINISH:  
 CONTACT PLATING: TIN PLATED 6C.03U"-88.35U"

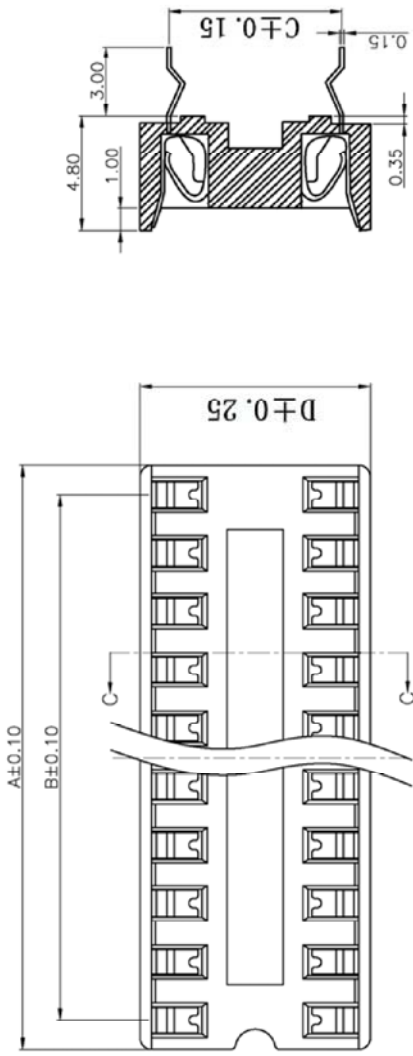

PCB LAYOUT

PIN NO.	DIM A	DIM B	DIM C	DIM D
8	10.16	7.62	7.62	10.16
14	17.78	15.24	7.62	10.16
16	20.32	17.76	7.62	10.16
18	22.86	20.32	7.62	10.16
20	25.4	22.86	7.62	10.16
22	27.95	25.4	7.62	10.16

2011/06/21	XIE	NEW DWG	A0
DATE	DR.BY	DESCRIPTION	MARK VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED		CnC Tech, LLC Industrial Cable and Connector Technology	
X.X ±0.30	X.X* ±3.00*	APPD:	TITLE: Low Cost Version IC Socket, Retentive Leg, 7.62MM Pitch
X.XX ±0.25	X.XX* ±1.00*	CHECK:	PRODUCT NO: 245-XX-1-03
X.XXX ±0.100	X.XXX* ±0.500*	DRAW:	DATE SCALE UNIT TYPE PAGE
			2011/06/21 1:1 mm Z 1/1