National Semiconductor

January 2003

LM320L/LM79LXXAC/LM13121 Series 3-Terminal Negative Regulators

General Description

The LM320L/LM79LXXAC/LM13121 dual marked series of 3-terminal negative voltage regulators features fixed output voltages of –5V, –12V, and –15V with output current capabilities in excess of 100mA. These devices were designed using the latest computer techniques for optimizing the packaged IC thermal/electrical performance. The LM79LXXAC series, even when combined with a minimum output compensation capacitor of 0.1µF, exhibits an excellent transient response, a maximum line regulation of 0.07% V_O/V, and a maximum load regulation of 0.01% V_O/mA.

The LM320L/LM79LXXAC/LM13121 series also includes, as self-protection circuitry: safe operating area circuitry for output transistor power dissipation limiting, a temperature independent short circuit current limit for peak output current limiting, and a thermal shutdown circuit to prevent excessive junction temperature. Although designed primarily as fixed voltage regulators, these devices may be combined with simple external circuitry for boosted and/or adjustable voltages and currents. The LM79LXXAC series is available in the 3-lead TO-92 package, 8-lead SOIC package, and the 6-Bump micro SMD package. The LM320L series is available in the 3-lead TO-92 package.


For output voltage other than –5V, –12V and –15V, the LM137L series provides an output voltage range from 1.2V to 47V.

Features

- Preset output voltage error is less than ±5% overload, line and temperature
- Specified at an output current of 100mA
- Easily compensated with a small 0.1µF output capacitor
- Internal short-circuit, thermal and safe operating area protection
- Easily adjustable to higher output voltages
- Maximum line regulation less than 0.07% V_{OUT}/V
- Maximum load regulation less than 0.01% V_{OUT}/mA
- See AN-1112 for micro SMD considerations

Typical Applications

Fixed Output Regulator

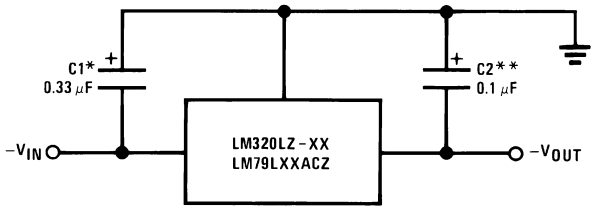


00774801

*Required if the regulator is located far from the power supply filter. A 1µF aluminum electrolytic may be substituted.

**Required for stability. A 1µF aluminum electrolytic may be substituted.

Adjustable Output Regulator

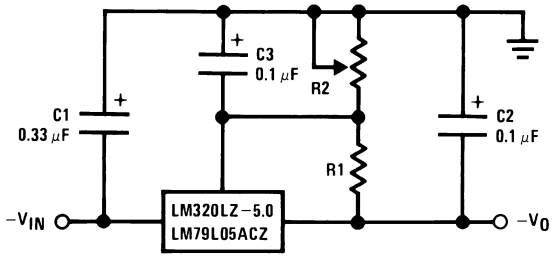


00774803

$-V_0 = -5V - (5V/R1 + I_Q) \bullet R2$,

$5V/R1 > 3\ I_Q$

Connection Diagrams


6-Bump micro SMD



00774820

Bump Side Down

TO-92 Plastic Package (Z)




00774802

Bottom View

© 2003 National Semiconductor Corporation

Connection Diagrams (Continued)

SO-8 Plastic (Narrow Body)



00774804

Top View

Ordering Information

Package	Part Number	Package Marking	Transport Media	NSC Drawing
8-Lead SOIC	LM79L05ACM	LM79L05ACM	95 Units/Rail	M08A
	LM79L05ACMX		2.5k Units Tape and Reel	
	LM79L13ACM	LM79L12ACM	95 Units/Rail	
	LM79L13ACMX		2.5k Units Tape and Reel	
	LM79L15ACM	LM79L15ACM	95 Units/Rail	
	LM79L15ACMX		2.5k Units Tape and Reel	
3-Pin TO-92	LM13121Z-5.0	320L79L05	1800 Units Per Box	Z03A
	LM13121Z-12	320L79L12	1800 Units Per Box	
	LM13121Z-15	320L79L15	1800 Units Per Box	
6-Bump micro SMD	LM79L05ACTL	XTPB	250 Units Tape and Reel	TLA06AMA
	LM79L05ACTLX		3k Units Tape and Reel	

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Input Voltage	
V_O = −5V, −12V, −15V	−35V
Internal Power Dissipation (Note 2)	Internally Limited
Operating Temperature Range	0˚C to +70˚C
Maximum Junction Temperature	+125˚C
Storage Temperature Range	−55˚C to +150˚C
Lead Temperature	
(Soldering, 10 sec.)	260˚C

Electrical Characteristics (Note 3)

T_A = 0˚C to +70˚C unless otherwise noted.

Output Voltage			−5V			−12V			−15V			Units
Input Voltage (unless otherwise noted)			−10V			−17V			−20V			
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
V_O	Output Voltage	T_J = 25˚C, I_O = 100mA	−5.2	−5	−4.8	−12.5	−12	−11.5	−15.6	−15	−14.4	
		1mA ≤ I_O ≤ 100mA	−5.25		−4.75	−12.6		−11.4	−15.75		−14.25	
		$V_{MIN} \le V_{IN} \le V_{MAX}$	(−20 ≤ V_{IN} ≤ −7.5)			(−27 ≤ V_{IN} ≤ −14.8)			(−30 ≤ V_{IN} ≤ −18)			V
		1mA ≤ I_O ≤ 40mA	−5.25		−4.75	−12.6		−11.4	−15.75		−14.25	
		$V_{MIN} \le V_{IN} \le V_{MAX}$	(−20 ≤ V_{IN} ≤ −7)			(−27 ≤ V_{IN} ≤ −14.5)			(−30 ≤ V_{IN} ≤ −17.5)			
ΔV_O	Line Regulation	T_J = 25˚C, I_O = 100mA			60			45			45	mV
		$V_{MIN} \le V_{IN} \le V_{MAX}$	(−20 ≤ V_{IN} ≤ −7.3)			(−27 ≤ V_{IN} ≤ −14.6)			(−30 ≤ V_{IN} ≤ −17.7)			V
		T_J = 25˚C, I_O = 40mA			60			45			45	mV
		$V_{MIN} \le V_{IN} \le V_{MAX}$	(−20 ≤ V_{IN} ≤ −7)			(−27 ≤ V_{IN} ≤ −14.5)			(−30 ≤ V_{IN} ≤ −17.5)			V
ΔV_O	Load Regulation	T_J = 25˚C			50			100			125	mV
		1mA ≤ I_O ≤ 100mA										
ΔV_O	Long Term Stability	I_O = 100mA		20			48			60		mV/khrs
I_Q	Quiescent Current	I_O = 100mA		2	6		2	6		2	6	mA
ΔI_Q	Quiescent Current Change	1mA ≤ I_O ≤ 100mA			0.3			0.3			0.3	
		1mA ≤ I_O ≤ 40mA			0.1			0.1			0.1	mA
		I_O = 100mA			0.25			0.25			0.25	mA
		$V_{MIN} \le V_{IN} \le V_{MAX}$	(−20 ≤ V_{IN} ≤ −7.5)			(−27 ≤ V_{IN} ≤ −14.8)			(−30 ≤ V_{IN} ≤ −18)			V
V_n	Output Noise Voltage	T_J = 25˚C, I_O = 100mA		40			96			120		µV
		f = 10Hz – 10kHz										
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection	T_J = 25˚C, I_O = 100mA	50			52			50			dB
		f = 120Hz										
	Input Voltage Required to Maintain Line Regulation	T_J = 25˚C, I_O = 100mA			−7.3			−14.6			−17.7	V
		I_O = 40mA			−7.0			−14.5			−17.5	V


Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.

Note 2: Thermal resistance of Z package is 60˚C/W θ_{JC}, 232˚C/W θ_{JA} at still air, and 88˚C/W at 400 ft/min of air. The M package θ_{JA} is 180˚C/W in still air. The maximum junction temperature shall not exceed 125˚C on electrical parameters.

Note 3: To ensure constant junction temperature, low duty cycle pulse testing is used.


Typical Performance Characteristics

Maximum Average Power Dissipation (TO-92)

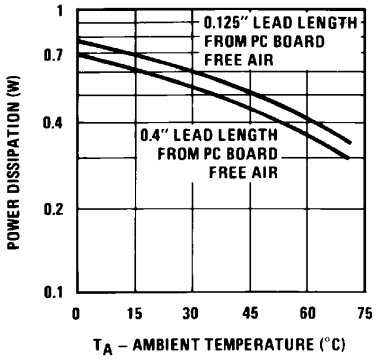


00774811

Peak Output Current

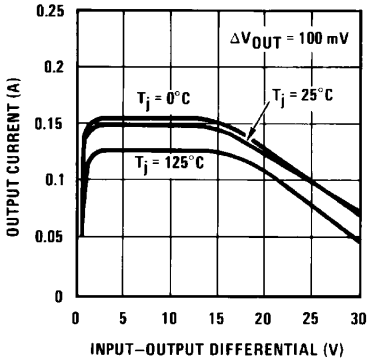


00774812

Short Circuit Output Current

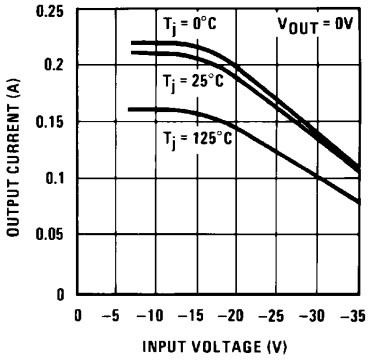


00774813

Dropout Voltage

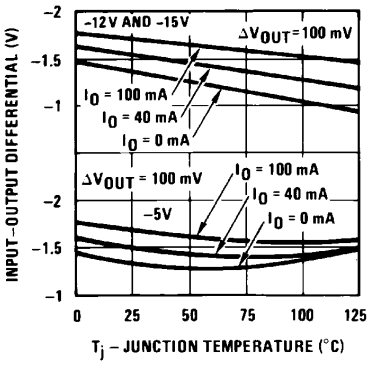


00774814

Ripple Rejection

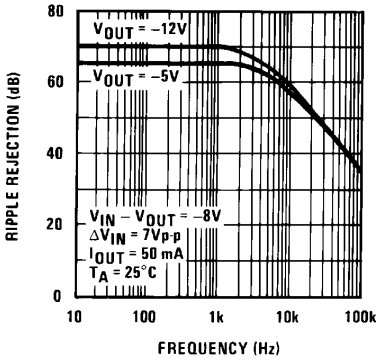

00774815


Output Voltage vs. Temperature (Normalized to 1V @ 25˚C)

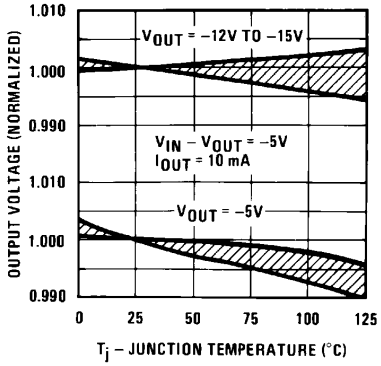

00774816


Typical Performance Characteristics (Continued)

Quiescent Current

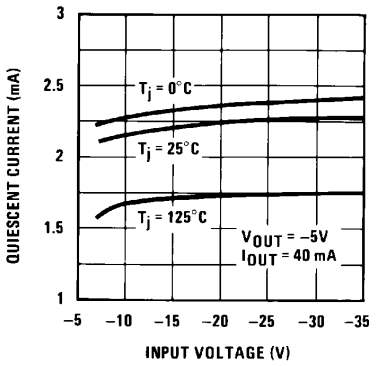

00774817


Output Impedance

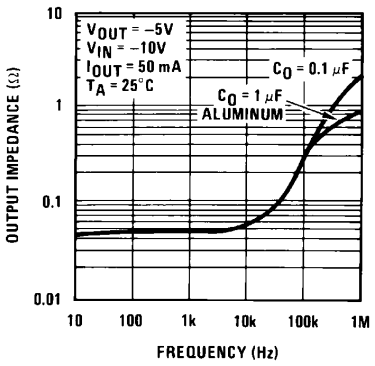

00774818

Typical Applications


±15V, 100mA Dual Power Supply

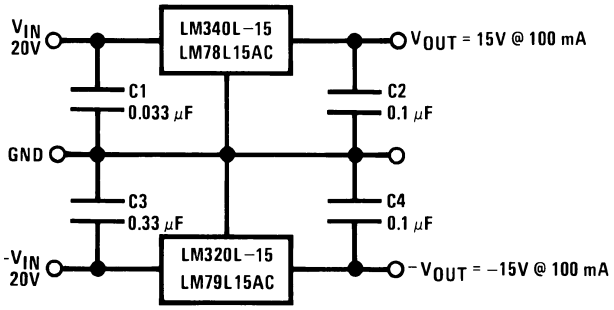

00774806


Schematic Diagrams

–5V

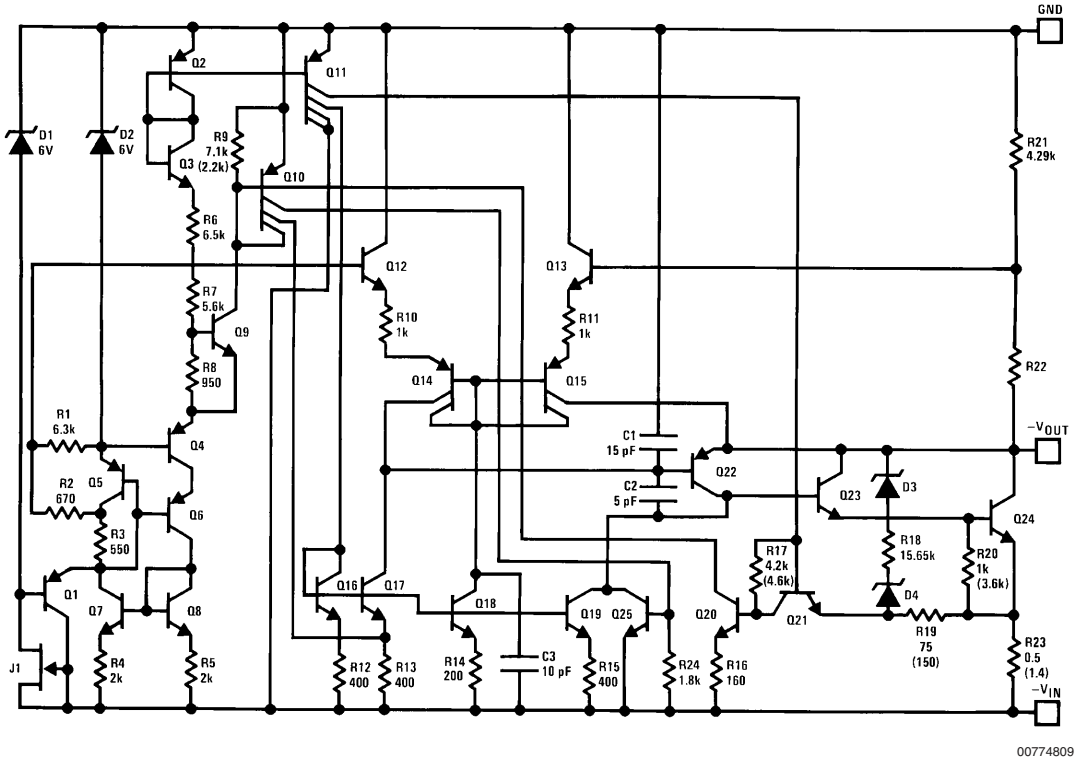

00774809


–12V and –15V

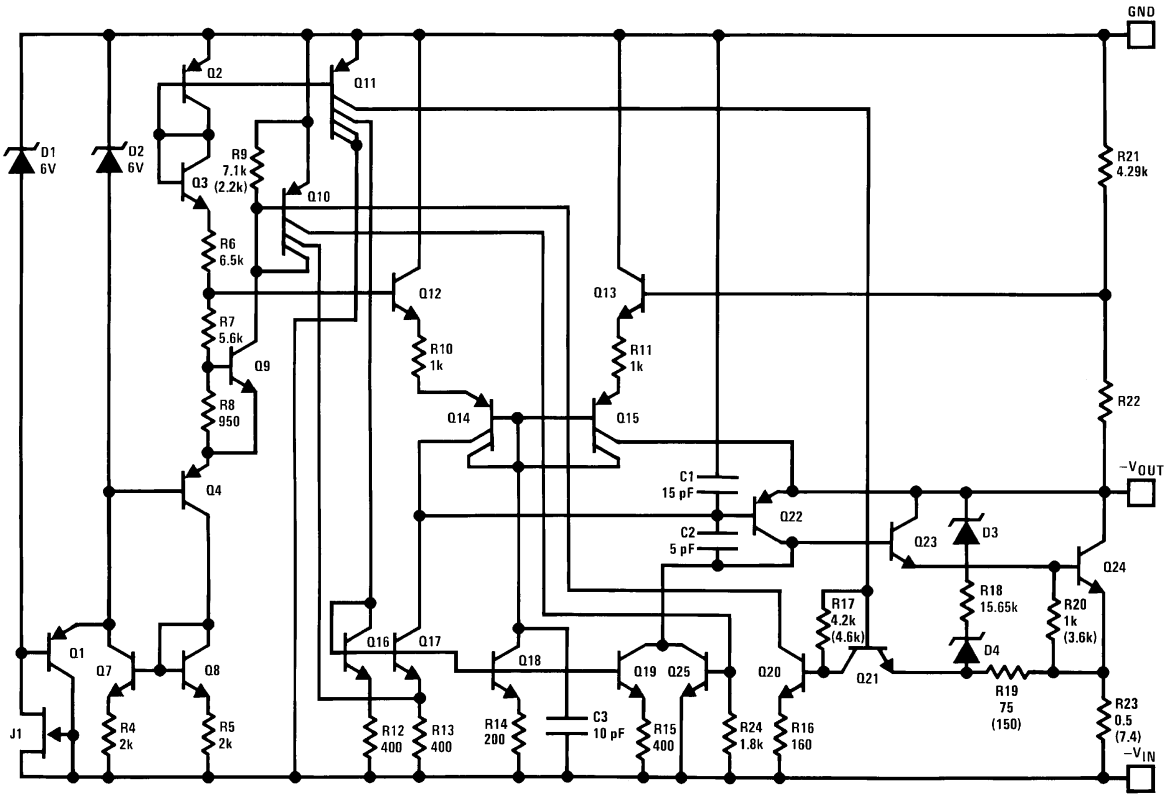


00774810

Physical Dimensions inches (millimeters)

unless otherwise noted

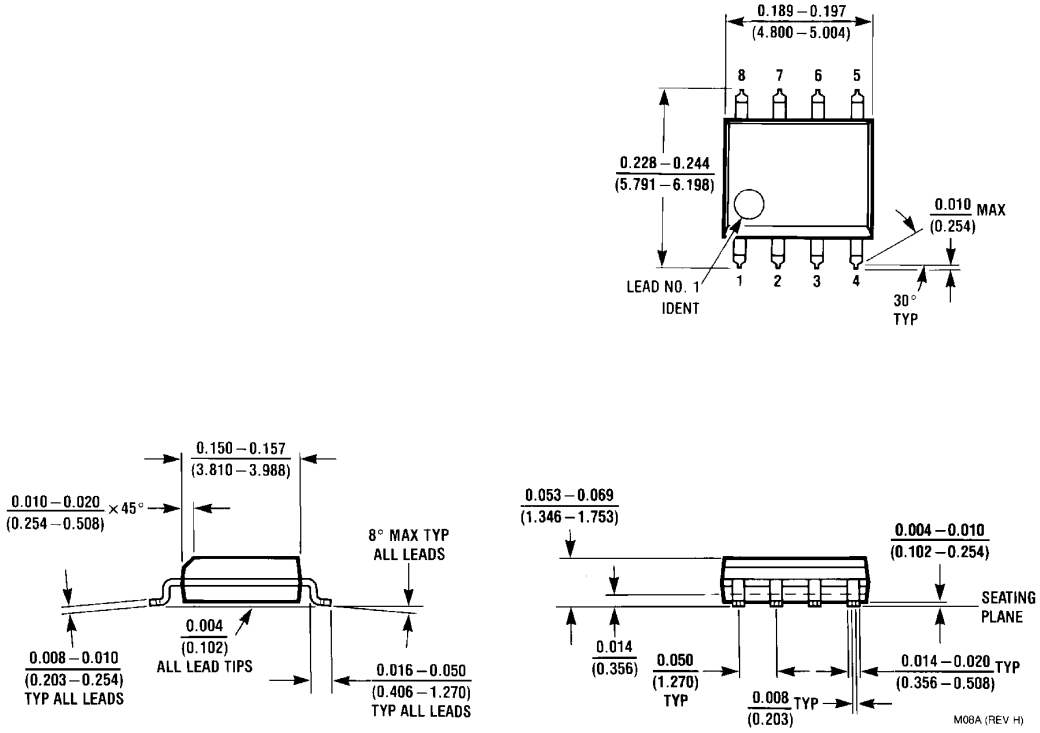


SOIC Package (M)
NS Package Number M08A

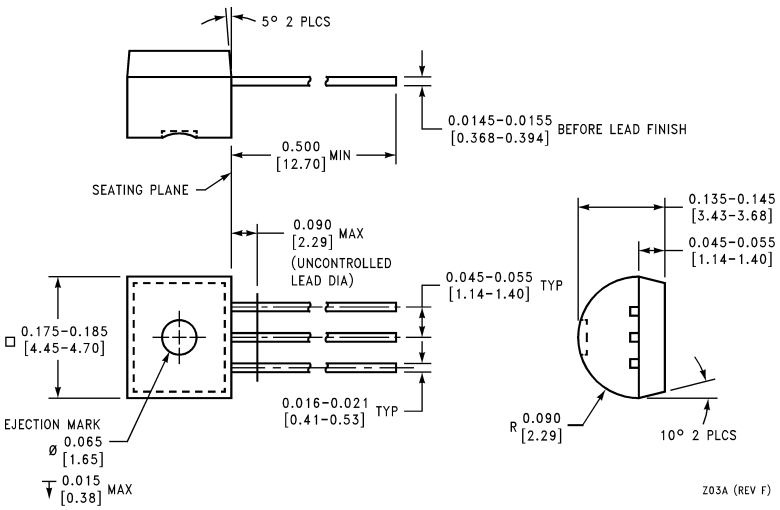


Molded Offset TO-92 (Z)
NS Package Number Z03A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

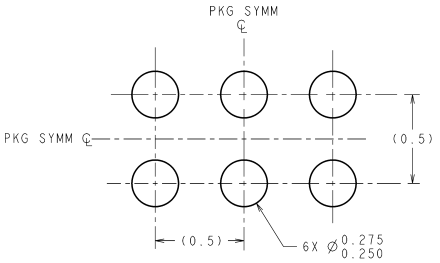

LAND PATTERN RECOMMENDATION

DIMENSIONS ARE IN MILLIMETERS

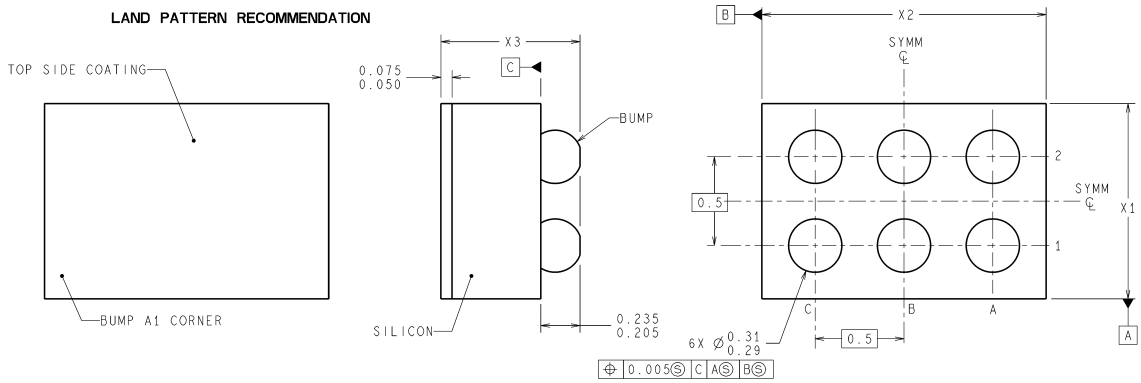

TLA06XXX (Rev A)

NOTES: UNLESS OTHERWISE SPECIFIED

1. EPOXY COATING.
2. 63Sn/67Pb EUTECTIC BUMP.
3. RECOMMEND NON-SOLDER MASK DEFINED LANDING PAD.
4. PIN A1 ESTABLISHED BY LOWER LEFT CORNER WITH RESPECT TO TEXT ORIENTATION.
5. XXX IN DRAWING NUMBER REPRESENTS PACKAGE SIZE VARIATION WHERE X1 IS PACKAGE WIDTH, X2 IS PACKAGE LENGTH AND X3 IS PACKAGE HEIGHT.
6. REFERENCE JEEC REGISTRATION MO-211, VARIATION BC.

6-Bump micro SMD
NS Package Number TLA06AMA
X_1 = 1006µm X_2 = 1793µm X_3 = 600µm

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Fax: 65-6250 4466
Email: ap.support@nsc.com
Tel: 65-6254 4466

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: nsj.crc@jksmtp.nsc.com
Tel: 81-3-5639-7560

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.