P-tec Corp. Tel:(866) 695 4162
2405 Commerce Circle Tel:(719) 589 3122
Alamosa CO 81101 Fax:(719) 589 3592
www.p-tec.net

PL00101 Series SMD LED 1206 Package

Features

*Flat lens package 3.2 x 1.6 x 1.4mm with reflector cup
*Small 30° viewing angle
*Compatible with IR solder-process
*Industry standard footprint
*3000 pcs per reel
*RoHS compliant


Absolute Maximum Ratings at T_A = 25°C

Power Dissipation	65mW
Reverse Voltage (<100μA)	5.0V
Max Forward Current	30mA
Peak Forward Current(1/10 Duty Cycle, 0.1ms Pulse Width)	100mA
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +85°C
Reflow Soldering Temperature	260°C for 10 seconds

Electrical & Optical Characteristics at T_A = 25°C

Part Number	Emitting Color	Chip Material	Peak Wave Length	Dominant Wave Length	Viewing Angle 2θ1/2	Forward Voltage @20mA (V)		Luminous Intensity @20mA (mcd)	
Water Clear Lens			nm	nm	Deg	Typ	Max	Min	Typ
PL00101-WCG07	Pure Green	GaP	555	563	30°	2.2	2.6	2.0	5.0

Package Dimensions are in **Millimeters**. Tolerance is ± 0.25mm unless otherwise specified.

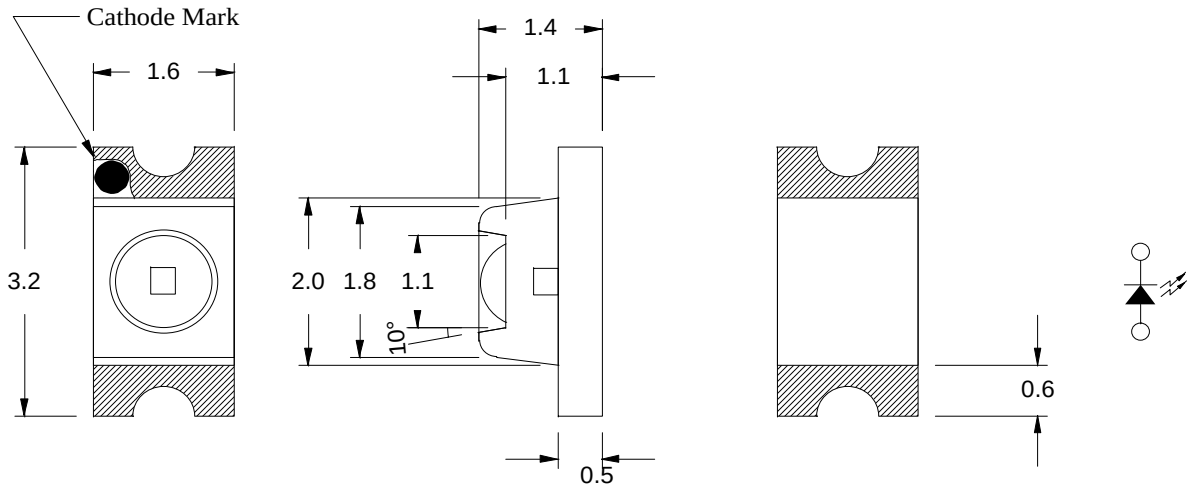

Recommended Soldering Pad Layout

