


Coupling Signal Transformer

70P7293

FEATURES


- Designed for use in Texas Instruments' Power Line Modem with E-Meter Platform
- Materials Meet Flammability Requirement of UL 94V-O
- 5,600 VDC Primary to Secondary Isolation

DRAWING

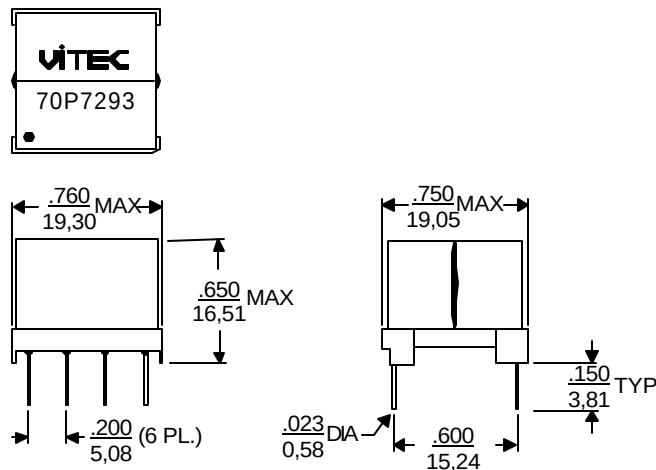

Dimensions Inches/mm +/- 0.010/0,254" Unless
noted

SCHEMATICS

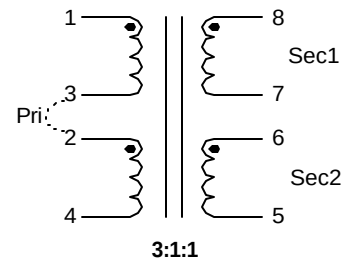


ELECTRICAL CHARACTERISTICS @ 25°C

Inductance* (1-4)	= 1.00 mH +/- 15%
Turns Ratio (1-4:8-7, 6-5)	= 3:1:1 +/- 1%
Pri DC Resistance (1-4)	= 0.83 Ohm MAX.
Sec DC Resistance (8-7, 6-5)	= 0.19 Ohm MAX
Dielectric Withstanding Voltage	= 5600 VDC (for 2 Sec)
Leakage Inductance* (1-4 short 8-7, 6-5)	= 5.5 uH MAX

Notes: All tests performed with pin 3 tied to pin 2
* Tested @ 100KHz, .100 Vac

SUGGESTED PCB LAYOUT



This drawing is the property of Vitec Electronics Corporation. It is not a controlled document. Therefore it is subject to change without prior notice. It's intended use is to supply preliminary information only. Duplication of all or any part of this drawing is prohibited.

AF 3990 040204

VITEC

6213 El Camino Real, Carlsbad, CA 92009
TEL: (760) 918-8831 FAX: (760) 918-8840