


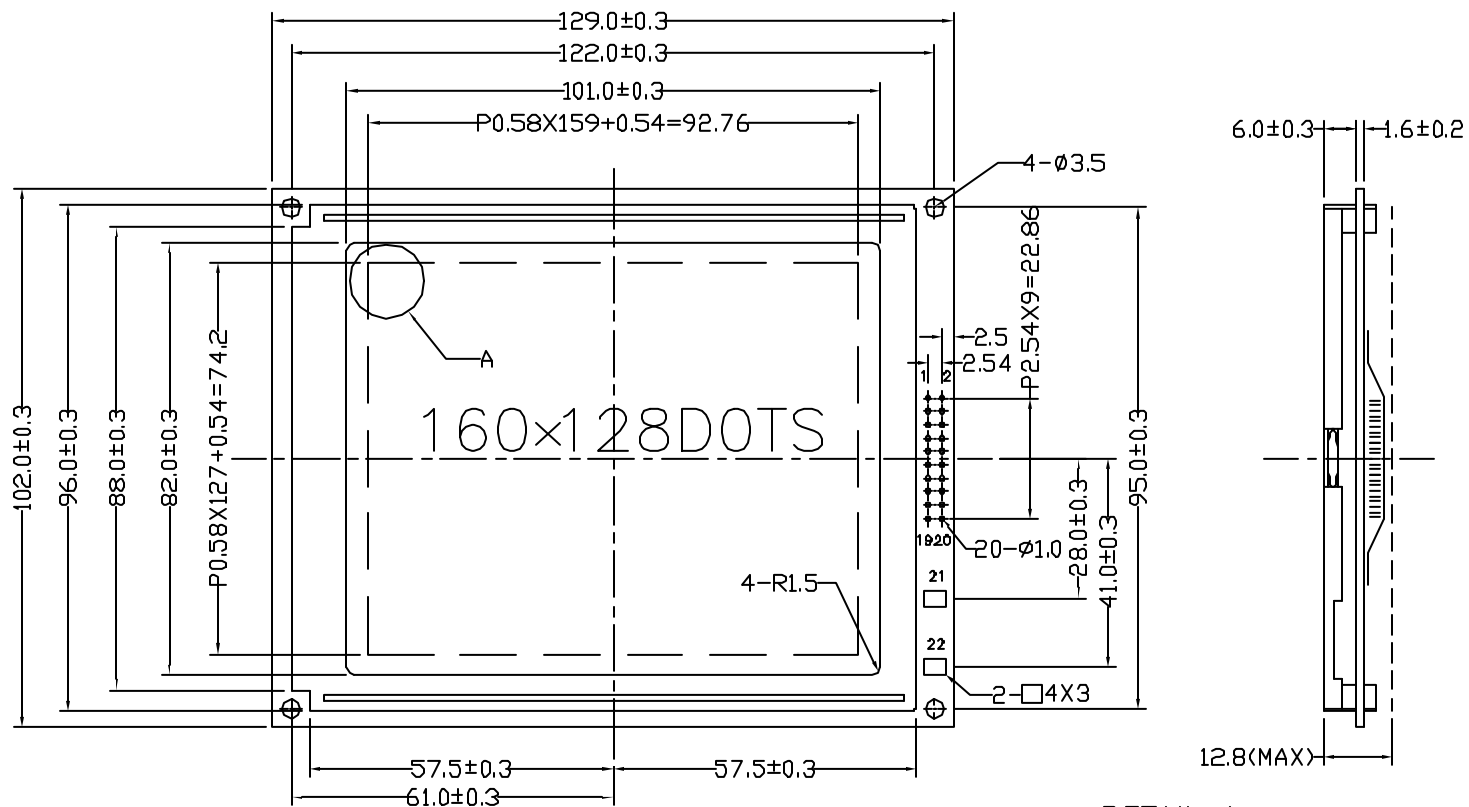


1	2	3	4	5	6	7	8	9	10	11
FG	VSS	VDD	VCOUT	VEE	WR	RD	CE	C/D	HALT	RESET
12	13	14	15	16	17	18	19	20	21	22
DO	D1	D2	D3	D4	D5	D6	D7	NC	EL1	EL2

NOTE:

1. DISPLAY TYPE: STN or FSTN
2. VIEWING DIRECTION: 6:00 or 12:00
3. POLARIZER MODE: REFLECTIVE or TRANSFLECTIVE
4. DRIVE METHOD: 1/128 DUTY 1/12 BIAS
5. LCD OPERATING VOLTAGE: 15.0V
6. OPERATING TEMP: NORMAL or WIDE
7. STORAGE TEMP: NORMAL or WIDE
8. CONTROLLER: T6963C
9. BACKLIGHT: NONE, EL, or LED
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: ±0.3MM

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China.

DRAWN BY:	TITLE: TM160128A	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM160128A-BWG-1	SCALE:
CONFIRMED BY:	SHEET NO: 01	UNIT: mm