Product data sheet
Characteristics

H362
Safety switch, heavy duty, fusible, 60A, 3 poles, 50 hp, 600 VAC/DC, NEMA 1

Product availability : Stock - Normally stocked in distribution facility

Price* : 638.00 USD



Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	None
Phase	3 phase
Number of Poles	3
Current Rating	60 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 1 steel
Maximum Horse Power Rating	15 hp 480 V at AC 50-60 Hz for 3 phase conforming to NEC 240.6 30 hp 480 V at AC 50-60 Hz for 3 phase conforming to NEC 430.52 15 hp 600 V at AC 50-60 Hz for 3 phase conforming to NEC 240.6 50 hp 600 V at AC 50-60 Hz for 3 phase conforming to NEC 430.52 30 hp 600 V at DC

Complementary

Short Circuit Current Rating	10 kA H or K 200 kA R, J or L
Fuse type	H or K R, J or L
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire
Wire Size	AWG 14...AWG 3 copper AWG 12...AWG 3 aluminium
Tightening torque	50 lbf.in (5.65 N.m) AWG 3)

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	45 lbf.in (5.08 N.m) AWG 6...AWG 4) 40 lbf.in (4.52 N.m) 0.01 in² (8.367 mm²) AWG 8) 50 lbf.in (5.65 N.m) 0.00…0.01 in² (2.06…5.261 mm²) AWG 14...AWG 10)
Depth	6.38 in (162.05 mm)
Width	10.5 in (266.70 mm)
Height	17.5 in (444.50 mm)
Net Weight	15.43 lb(US) (7 kg)

Environment

Certifications	UL listed file E2875

Ordering and shipping details

Category	00008 - H&HU SW,2&3P,N1,30-200A
Discount Schedule	DE1
GTIN	00785901482147
Nbr. of units in pkg.	1
Package weight(Lbs)	15.1 lb(US) (6.85 kg)
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	7.30 in (18.542 cm)
Package 1 width	10.90 in (27.686 cm)
Package 1 Length	20.00 in (50.8 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	40
Package 2 Weight	636.00 lb(US) (288.485 kg)
Package 2 Height	41.00 in (104.14 cm)
Package 2 width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

Contractual warranty

Warranty	18 months

Approximate Dimensions

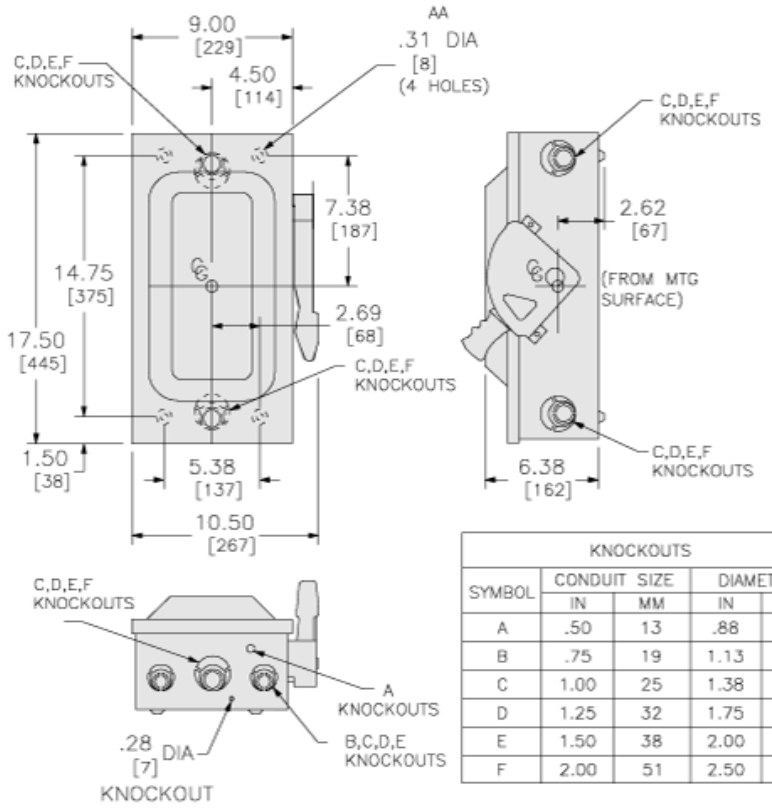

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	45
E	1.50	38	2.00	51
F	2.00	51	2.50	64