


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6479: REVISE DESCRIPTION TO J1 FROM TYPE A TO B	10/19/12	D.FRISIELLO

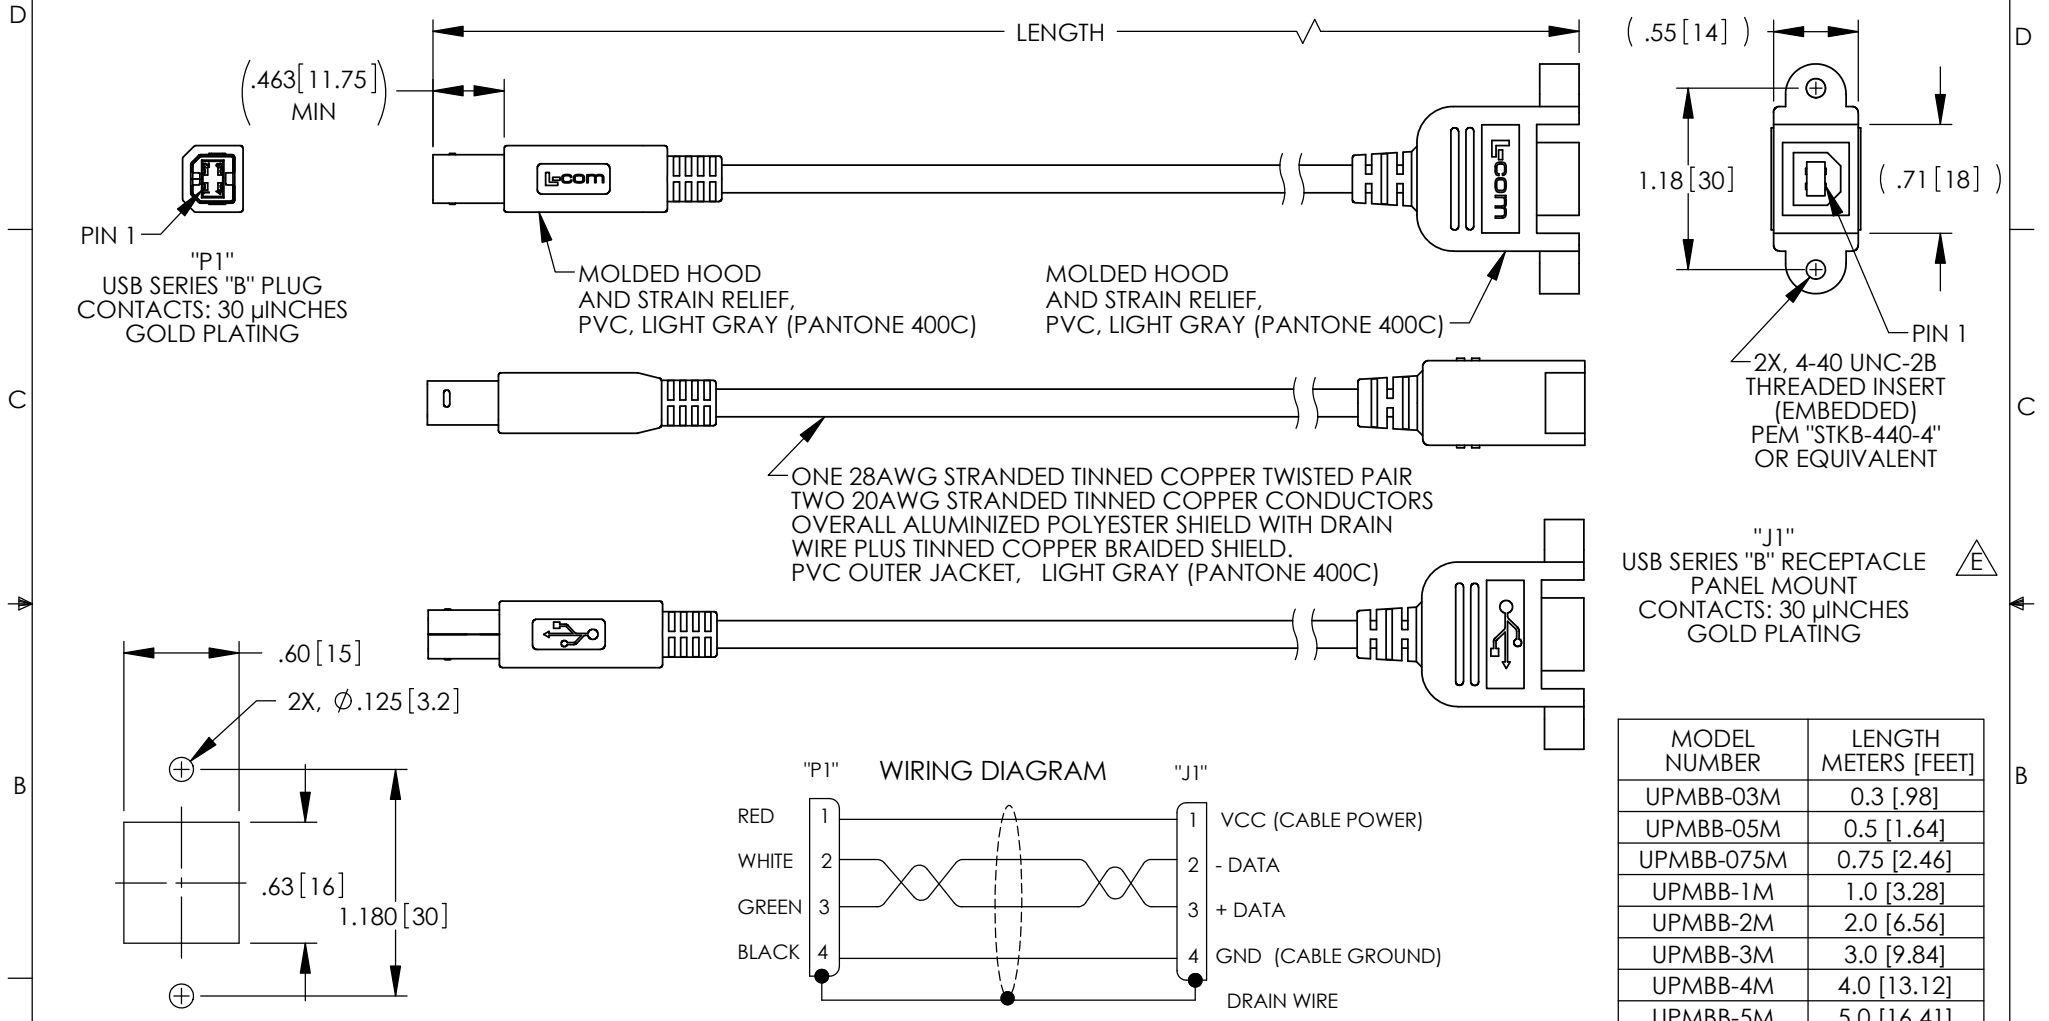

MODEL NUMBER	LENGTH METERS [FEET]
UPMBB-03M	0.3 [.98]
UPMBB-05M	0.5 [1.64]
UPMBB-075M	0.75 [2.46]
UPMBB-1M	1.0 [3.28]
UPMBB-2M	2.0 [6.56]
UPMBB-3M	3.0 [9.84]
UPMBB-4M	4.0 [13.12]
UPMBB-5M	5.0 [16.41]

- NOTES:
1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
 3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 4. MOUNTING HARDWARE INCLUDED: 2X #4-40 X .38 LG. PHILLIPS HD SCREW
 5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	01/04/2010		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. CASTRO	01/12/2010	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION
PROJECTION	APPROVED BY S. SMITH	01/13/2010		COLOR VARIATIONS MAY OCCUR
	SCALE: NONE	FSCM NO. A 43321	DWG. NO. UPMBB	REV. E
		CAD FILE: UPMBB.SLDDRW		SHEET 1 OF 1