
This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0522660417
Status: Active
Overview: splash_proof
Description: 2.50mm (.098") Pitch Splash Proof Wire-to-Wire Plug Housing, 3 and 4 Circuit Version, 4 Circuits

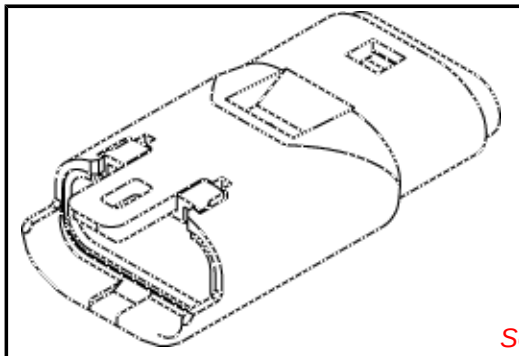

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-52213-002 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E29179

General

Product Family	Crimp Housings
Series	52266
MolexKits	Yes
Overview	splash_proof
Product Name	Splash Proof

Physical

Circuits (maximum)	4
Flammability	94V-0
Gender	Male
Glow-Wire Compliant	No
Number of Rows	1
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Material Info

Reference - Drawing Numbers

Product Specification	PS-52213-002
Sales Drawing	SD-52266-**1*

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.


Search Parts in this Series
52266Series

Mates With
52213


Use With
50147

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

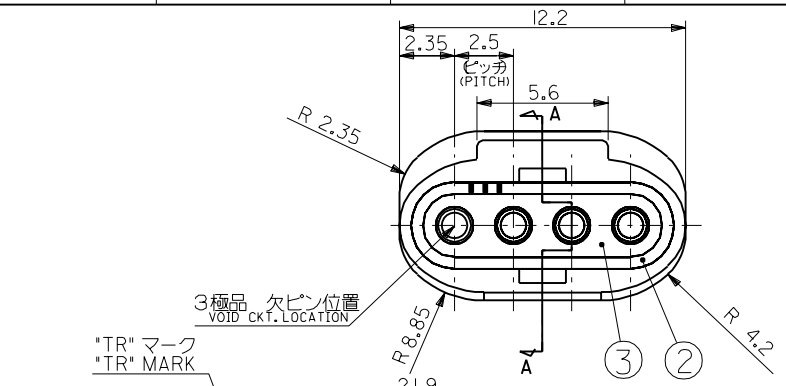

断面A－A（端子装着状態図）
SECT.A-A(TERM.ASSEMBLY DRAWING)

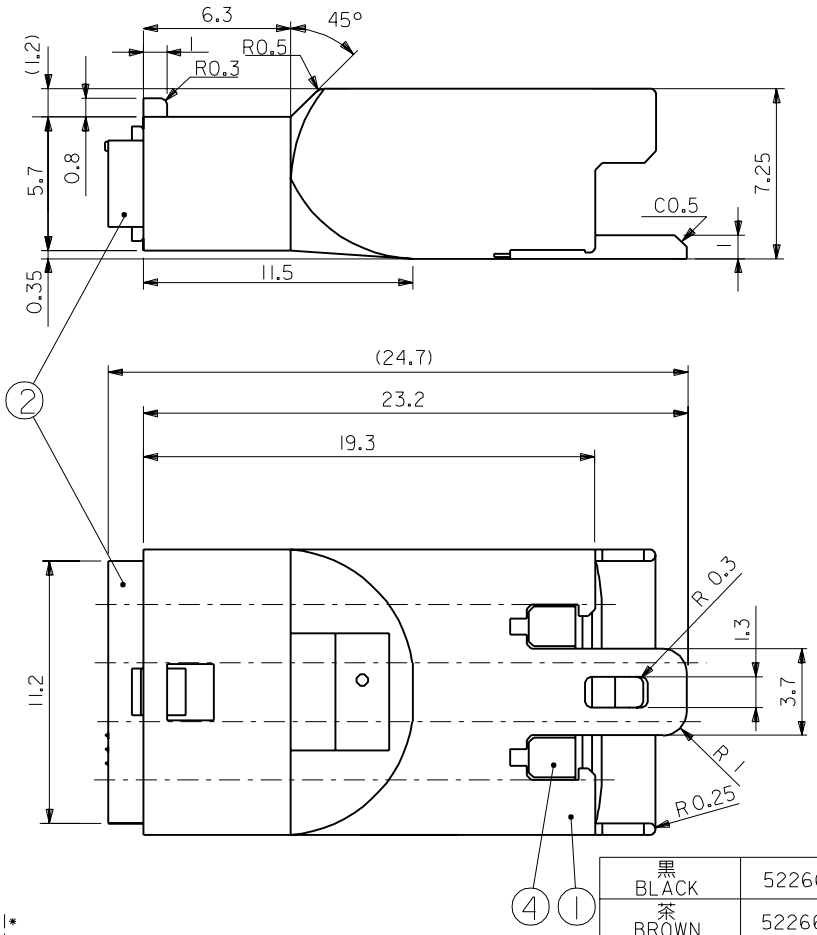

注記
NOTES

1. 適合クリンプ ピン ; 50147-8*00
   APPLICABLE CRIMP PIN ; 50147-8*00
2. 嵌合相手 ; 52213-**1*
   MATES WITH ; 52213-**1*

黒 BLACK	52266-0311	3
茶 BROWN	52266-0417	4
ハウジングの色 HS'G COLOR	製品番号 ENG.No.	極数 No. OF CKT.

シリコンゴム SILICONE	シール SEAL	⑤
ポリエステル (15%G.F.) POLYESTER	シール ストッパー SEAL STOPPER	④
シリコンゴム SILICONE	ワイヤーエンド シール WIRE END SEAL	③
ポリエステル (15%G.F.) POLYESTER	キャップ CAP	②
ポリエステル (15%G.F.) POLYESTER	プラグ ハウジング PLUG HOUSING	①
材料 MATERIAL	名称 TITLE	

端子装着時の断面 A-Aの構成部品
COMPONENT(SECT.A-A)

角度 ANGLE	±3°
30以上 OVER	±0.3
10以上 30未満 OVER UNDER	±0.25
10未満 UNDER	±0.2
一般公差 GENERAL TOLERANCES	

LTR	記号	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
	A	変更 REVISED (J31090)	M.SEKI	'93/10/26
	0	新規作成 PROPOSED (J10601)	M.SEKI	'91/8/20

REVISE ONLY ON CAD SYSTEM

材料 MATERIAL 表参照 SEE CHART
仕上げ FINISH
適用電線範囲 WIRE RANGE AVSS-0.3 CAVS-0.3
被覆外径 INS. RANGE ∅ 1.4-1.5
DRAWN BY '91/7/17 M.SANO
CHK'D BY '93/11/9 M.SANO M.SAKANO
APP'D BY '93/11/9 M.ENOMOTO
尺度 SCALE 5-1

MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
EDP. NO.
ENG. NO. SD-52266-**1* REV A
TITLE 名称 2.5 MINI SPLASH PROOF CONN. PLUG HOUSING ASS'Y

:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING
ENG. NO SD-52266-**1*
EDP NO.
5221 2ASSY.S17 A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス（株）の所有する情報を含むもので当社の許可なく複製を禁止する。