


Automotive ultrafast recovery diode

Datasheet - production data

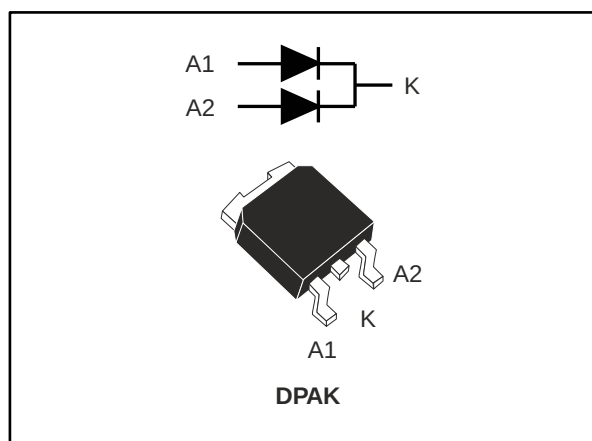

Description

This dual center tap diode is suited for switch mode power supplies and high frequency DC to DC converters.

Packaged in DPAK, this device is intended for use in low voltage high frequency inverters, freewheeling and polarity protection for automotive applications.

Table 1: Device summary

Symbol	Value
$I_{F(AV)}$	2 x 3 A
V_{RRM}	200 V
$V_F(\text{typ.})$	0.80 V
$T_J(\text{max.})$	175 °C
$T_{rr}(\text{typ.})$	14 ns

Features

- AEC-Q101 qualified
- Suited for SMPS
- Low losses
- Low forward and reverse recovery time
- High surge current capability
- High junction temperature
- PPAP capable



1 Characteristics

Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified)

Symbol	Parameter		Value	Unit
V_{RRM}	Repetitive peak reverse voltage		200	V
$I_{F(RMS)}$	Forward rms current		11	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$, square wave	$T_c = 160\text{ °C}$	3	A
		$T_c = 155\text{ °C}$	6	
I_{FSM}	Surge non repetitive forward current	$t_p = 10\text{ ms}$ sinusoidal	60	A
T_{stg}	Storage temperature range		-65 to +175	°C
T_j	Operating junction temperature range		-40 to +175	°C

Table 3: Thermal parameters

Symbol	Parameter		Max. value	Unit
$R_{th(j-c)}$	Junction to case	Per diode	5	°C/W
		Per device	3	
$R_{th(c)}$	Coupling		1	

When the two diodes 1 and 2 are used simultaneously:

$$\Delta T_j(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)} (\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

Table 4: Static electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	$V_R = V_{RRM}$	-		3	μA
		$T_j = 125\text{ °C}$		-	3	30	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	$I_F = 3\text{ A}$	-	0.98	1.1	V
		$T_j = 150\text{ °C}$		-	0.8	0.95	
		$T_j = 25\text{ °C}$	$I_F = 6\text{ A}$	-	1.1	1.25	
		$T_j = 150\text{ °C}$		-	0.9	1.05	

Notes:

(1)Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

(2)Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 0.85 \times I_{F(AV)} + 0.033 \times I_{F(RMS)}^2$$

Table 5: Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$I_F = 1\text{ A}$, $di_F/dt = -100\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_J = 25\text{ }^\circ\text{C}$	-	14	20	ns
		$I_F = 1\text{ A}$, $di_F/dt = -50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_J = 25\text{ }^\circ\text{C}$	-	21	30	
I_{RM}	Reverse recovery current	$I_F = 3\text{ A}$, $di_F/dt = 200\text{ A}/\mu\text{s}$, $V_R = 160\text{ V}$, $T_J = 125\text{ }^\circ\text{C}$	-	4	5.5	A
t_{fr}	Forward recovery time	$I_F = 3\text{ A}$, $di_F/dt = 200\text{ A}/\mu\text{s}$, $V_{FR} = 1.1 \times V_{Fmax}$, $T_J = 25\text{ }^\circ\text{C}$	-	24		ns
V_{FP}	Forward recovery voltage	$I_F = 3\text{ A}$, $di_F/dt = 200\text{ A}/\mu\text{s}$, $T_J = 25\text{ }^\circ\text{C}$	-	3.7		V

1.1 Characteristics (curves)

Figure 1: Peak current versus duty cycle (per diode)

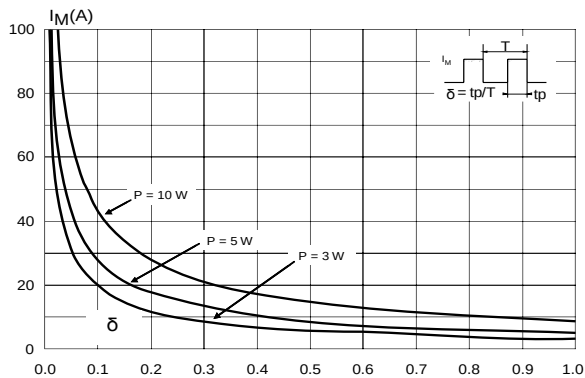


Figure 2: Forward voltage drop versus forward current (typical values, per diode)

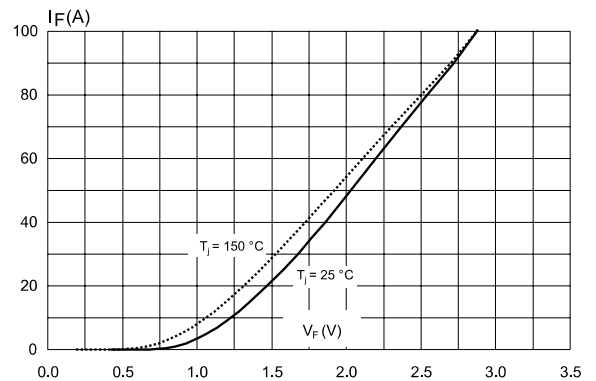


Figure 3: Forward voltage drop versus forward current (maximum values, per diode)

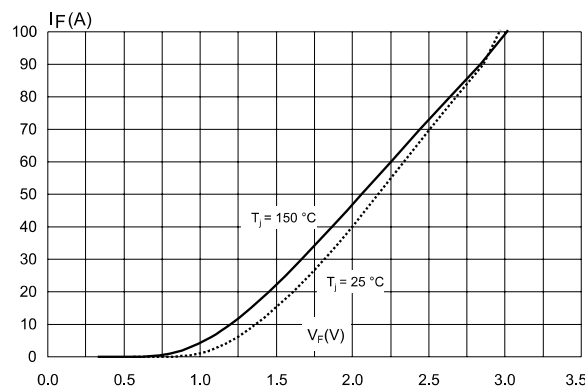


Figure 4: Relative variation of thermal impedance junction to case versus pulse duration (per diode)

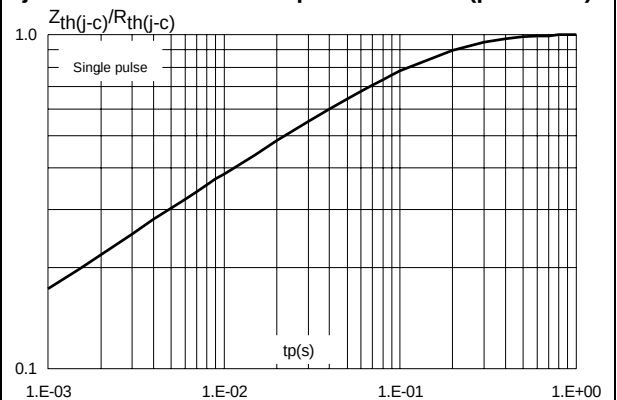


Figure 5: Junction capacitance versus reverse applied voltage (typical values, per diode)

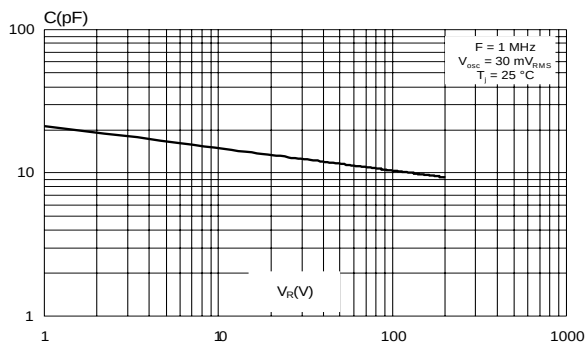


Figure 6: Reverse recovery charges versus di_F/dt (typical values, per diode)

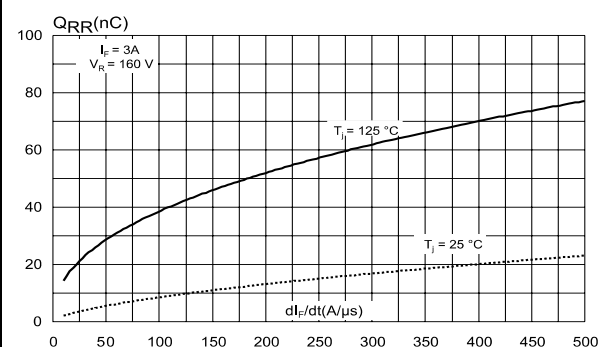


Figure 7: Reverse recovery time versus di/dt (typical values, per diode)

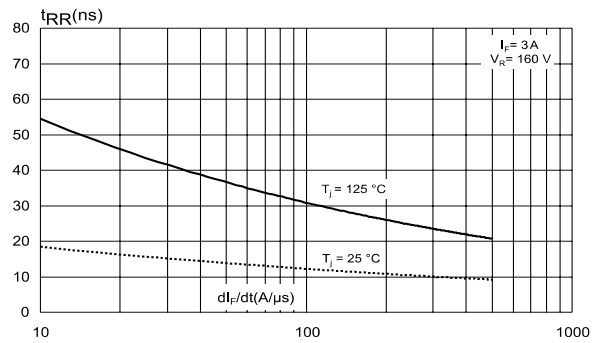


Figure 8: Reverse recovery current versus di/dt (typical values, per diode)

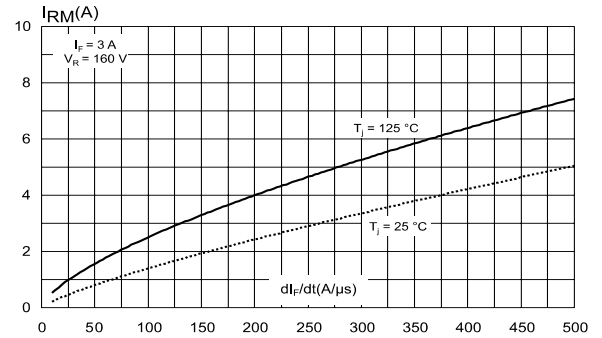


Figure 9: Dynamic parameters versus junction temperature


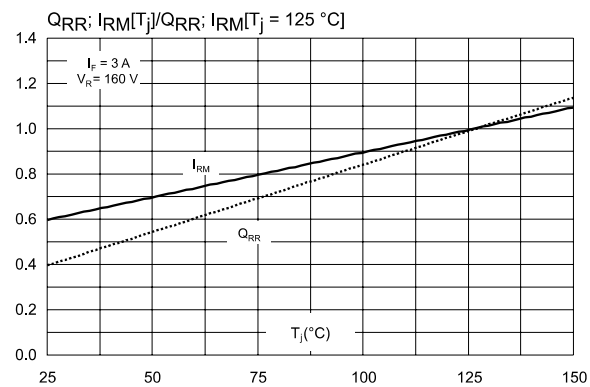


Figure 10: Thermal resistance junction to ambient versus copper surface under tab for DPAK package (typical values)

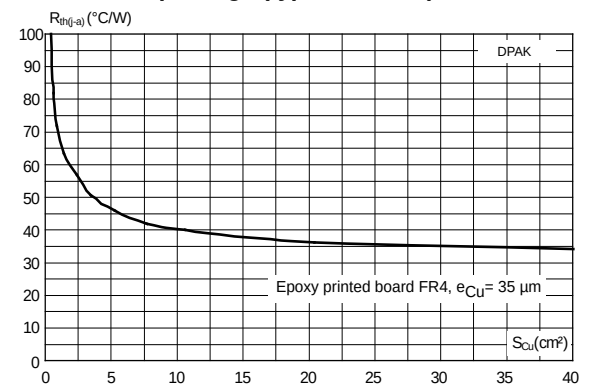

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)

2.1 DPAK package information

Figure 11: DPAK package outline


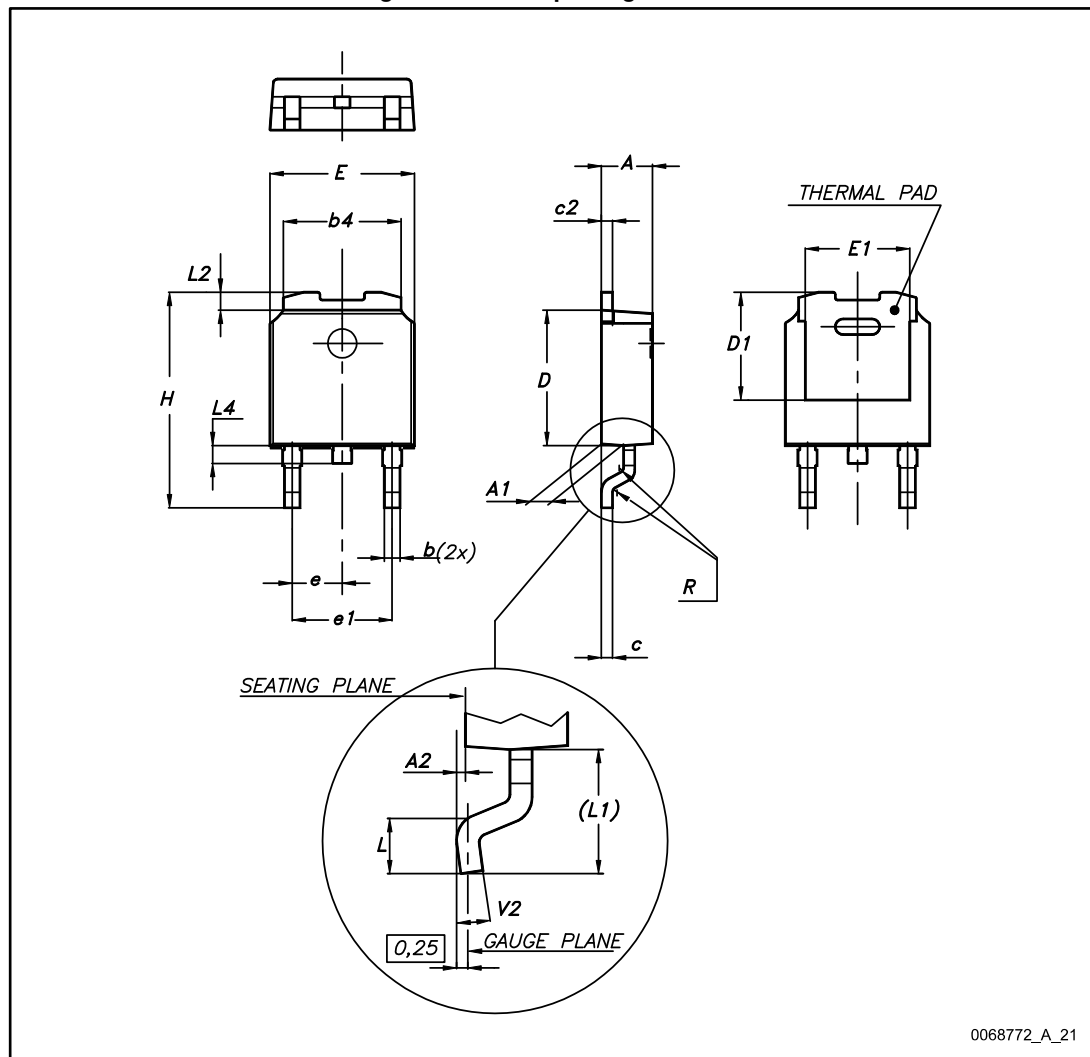


Table 6: DPAK mechanical data

Dim.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.087		0.094
A1	0.90		1.10	0.035		0.043
A2	0.03		0.23	0.001		0.009
b	0.64		0.90	0.025		0.035
b4	5.20		5.40	0.205		0.213
c	0.45		0.60	0.018		0.024
c2	0.48		0.60	0.019		0.024
D	6.00		6.20	0.236		0.244
D1	4.95	5.10	5.25	0.195	0.201	0.207
E	6.40		6.60	0.252		0.260
E1	5.10	5.20	5.30	0.201	0.205	0.209
e	2.16	2.28	2.40	0.085	0.090	0.094
e1	4.40		4.60	0.173		0.181
H	9.35		10.10	0.368		0.398
L	1.00		1.50	0.039		0.059
(L1)	2.60	2.80	3.00	0.102	0.110	0.118
L2	0.65	0.80	0.95	0.026	0.031	0.037
L4	0.60		1.00	0.024		0.039
R		0.20			0.008	
V2	0°		8°	0°		8°

Figure 12: DPAK recommended footprint (dimensions are in mm)

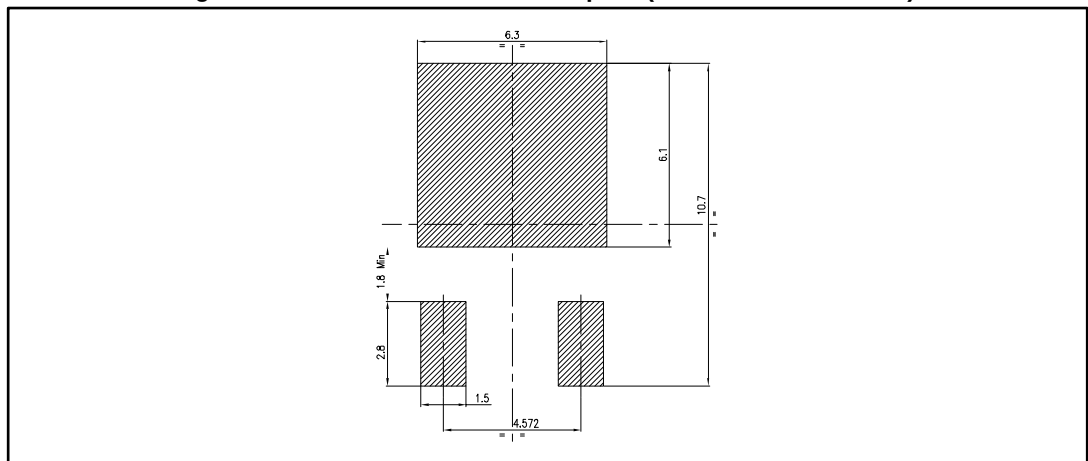

3 Ordering information

Table 7: Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH602CBY-TR	STTH6 02CBY	DPAK	0.30 g	2500	Tape and reel

4 Revision history

Table 8: Document revision history

Date	Revision	Changes
24-Oct-2012	1	First issue.
16-Mar-2017	2	Updated Table 3: "Thermal parameters" . Minor text changes.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved