


LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		R2		REVISED PER ECO-11-004587	11MAR11	RK	HMR	

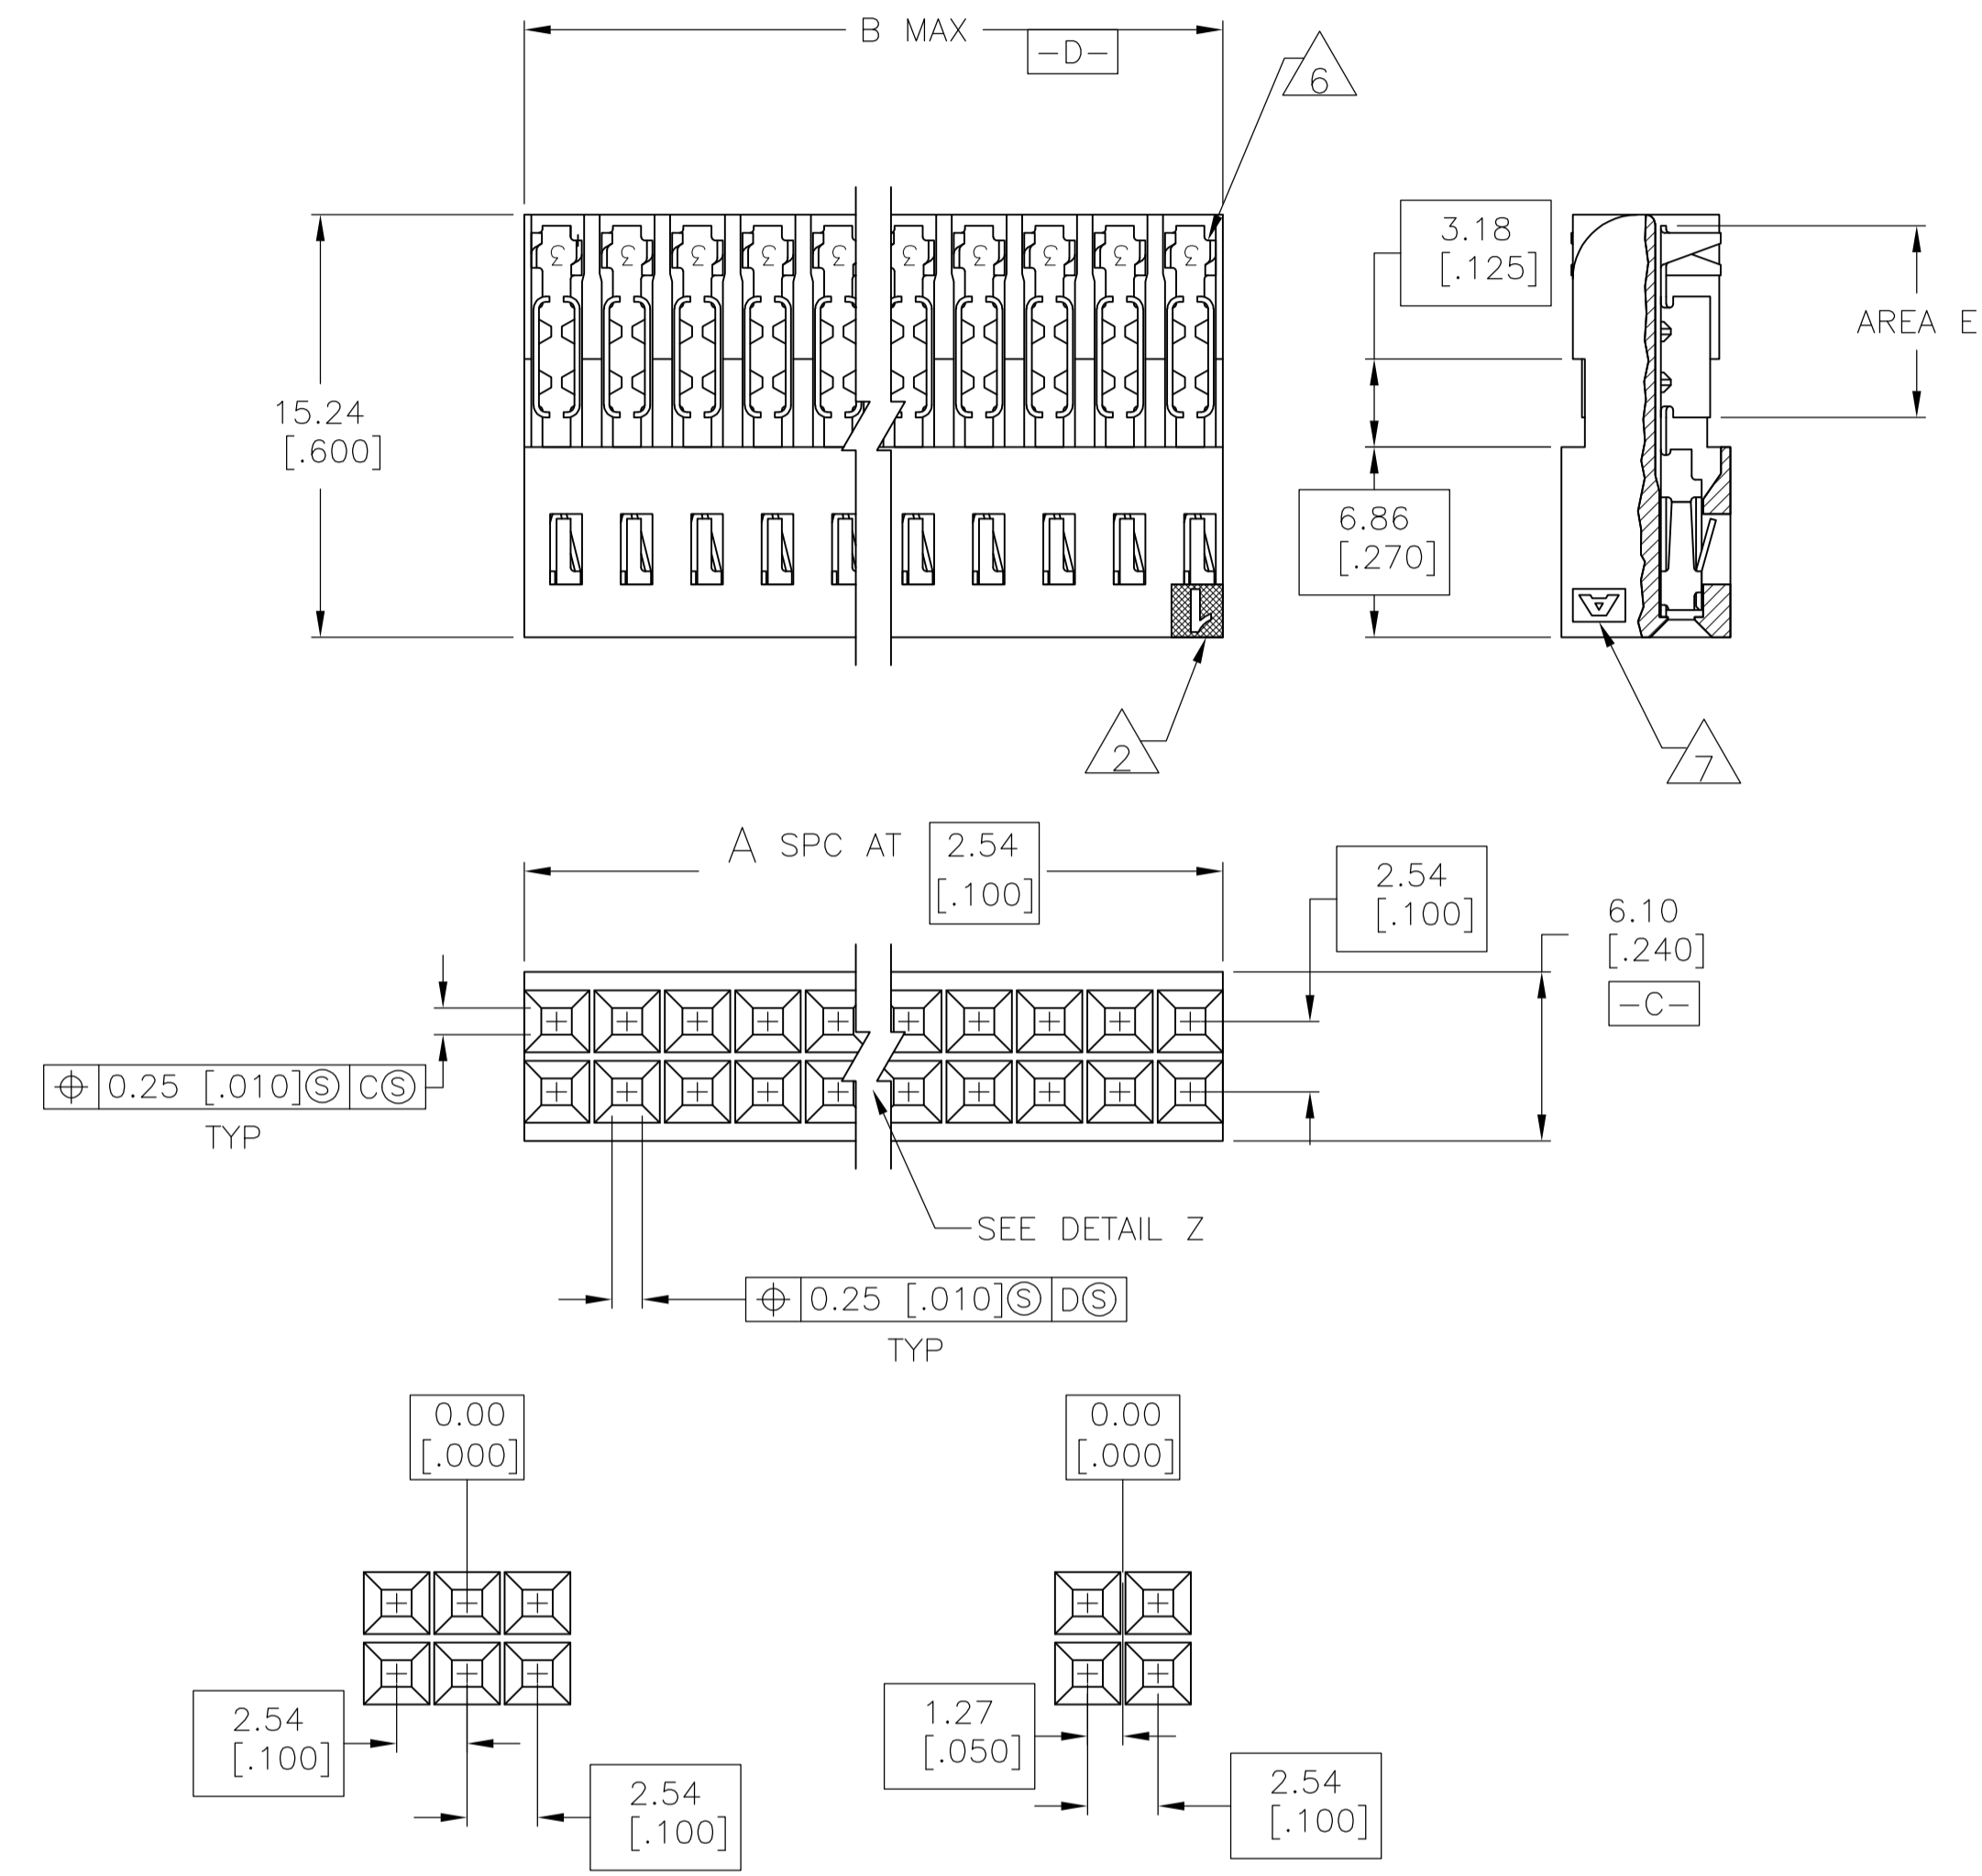

- 1 HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK  
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 4 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 5. USE WITH #20-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "3" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 OBSOLETE PART NUMBER.
- 9 ROHS 2002/95/EC COMPLIANT.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

FINISH	B	A	NO. OF POSN	PART NO.
10	OBSOLETE	4	9	81.28 [3.200] 31 64 8-102448-0
10	OBSOLETE	4	9	76.20 [3.000] 29 60 7-102448-8
		4	9	63.50 [2.500] 24 50 7-102448-3
		4	9	50.80 [2.000] 19 40 6-102448-8
		4	9	43.18 [1.700] 16 34 6-102448-5
10	OBSOLETE	4	9	40.64 [1.600] 15 32 6-102448-4
		4	9	38.10 [1.500] 14 30 6-102448-3
10	OBSOLETE	4	9	35.56 [1.400] 13 28 6-102448-2
		4	9	33.02 [1.300] 12 26 6-102448-1
		4	9	30.48 [1.200] 11 24 6-102448-0
10	OBSOLETE	4	9	27.94 [1.100] 10 22 5-102448-9
		4	9	25.40 [1.000] 9 20 5-102448-8
		4	9	22.86 [.900] 8 18 5-102448-7
10	OBSOLETE	4	9	20.32 [.800] 7 16 5-102448-6
		4	9	17.78 [.700] 6 14 5-102448-5
		4	9	15.24 [.600] 5 12 5-102448-4
		4	9	12.70 [.500] 4 10 5-102448-3
		4	9	10.16 [.400] 3 8 5-102448-2
10	OBSOLETE	4	9	7.62 [.300] 2 6 5-102448-1

	SUPERSEDED BY 1-102448-8	3	91.44 [3.600]	35	72	8	3-102448-4
	SUPERSEDED BY 1-102448-3	3	88.90 [3.500]	34	70	8	3-102448-3
	SUPERSEDED	3	86.36 [3.400]	33	68	8	3-102448-2
	SUPERSEDED	3	83.82 [3.300]	32	66	8	3-102448-1
10	OBSOLETE	3	81.28 [3.200]	31	64		3-102448-0
	SUPERSEDED BY 1-102448-3	3	78.74 [3.100]	30	62	8	2-102448-9
10	OBSOLETE	3	76.20 [3.000]	29	60		2-102448-8
	SUPERSEDED BY 1-102448-3	3	73.66 [2.900]	28	58	8	2-102448-7
	SUPERSEDED	3	71.12 [2.800]	27	56	8	2-102448-6
	SUPERSEDED BY 1-102448-1	3	68.58 [2.700]	26	54	8	2-102448-5
	SUPERSEDED BY 1-102448-1	3	66.04 [2.600]	25	52	8	2-102448-4
		3	63.50 [2.500]	24	50		2-102448-3
	SUPERSEDED BY 1-102448-0	3	60.96 [2.400]	23	48	8	2-102448-2
	SUPERSEDED BY 1-102448-0	3	58.42 [2.300]	22	46	8	2-102448-1
	SUPERSEDED	3	55.88 [2.200]	21	44	8	2-102448-0
	SUPERSEDED BY 102448-8	3	53.34 [2.100]	20	42	8	1-102448-9
		3	50.80 [2.000]	19	40		1-102448-8
	SUPERSEDED BY 102448-7	3	48.26 [1.900]	18	38	8	1-102448-7
	SUPERSEDED BY 102448-7	3	45.72 [1.800]	17	36	8	1-102448-6
10	SUPERSEDED BY 6-102448-5	3	43.18 [1.700]	16	34		1-102448-5
10	OBSOLETE	3	40.64 [1.600]	15	32		1-102448-4
		3	38.10 [1.500]	14	30		1-102448-3
10	OBSOLETE	3	35.56 [1.400]	13	28		1-102448-2
		3	33.02 [1.300]	12	26		1-102448-1
		3	30.48 [1.200]	11	24		1-102448-0
10	OBSOLETE	3	27.94 [1.100]	10	22		102448-9
		3	25.40 [1.000]	9	20		102448-8
		3	22.86 [.900]	8	18		102448-7
10	OBSOLETE	3	20.32 [.800]	7	16		102448-6
		3	17.78 [.700]	6	14		102448-5
		3	15.24 [.600]	5	12		102448-4
		3	12.70 [.500]	4	10		102448-3
10	SUPERSEDED BY 5-102448-2	3	10.16 [.400]	3	8		102448-2
10	OBSOLETE	3	7.62 [.300]	2	6		102448-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.13[.005]
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

MATERIAL: 1

FINISH: SEE TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRN: S. SHUEY 30DEC91

CHK: M. RIDER 06JAN92

APVD: R. FELLIX 07JAN92

NAME: AMPMODU MT, RCPT ASSY, STANDARD PRESSURE CONTACTS FOR 20-22 AWG WIRE SIZE

PRODUCT SPEC: 108-25015

APPLICATION SPEC: 114-25032

SIZE: A1

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET: 1 OF 1

REV: R2