REV.	ECN.NO.	MODIFY.CONTENT	DATE
A	ES.00604.036	初發行	04/13/2006

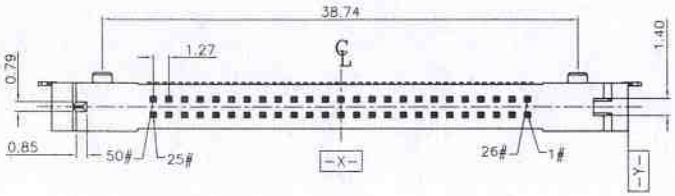

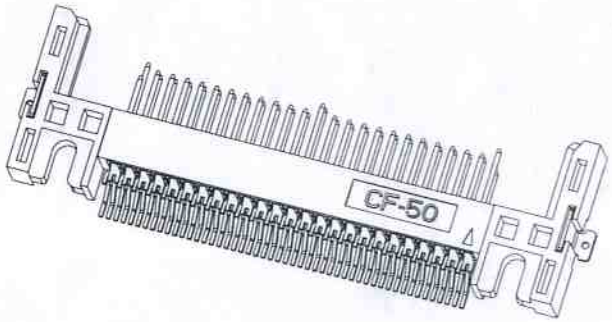

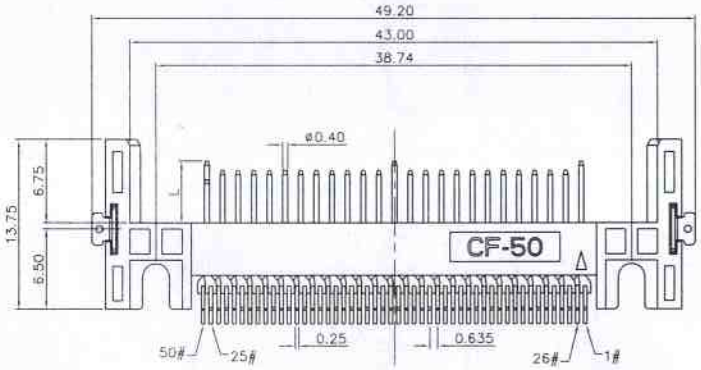

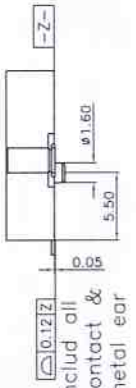

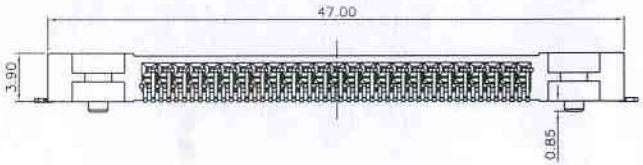

Notes:
1.All Dimensions are in Millimeters.
2.Operation voltage: 100 VAC max.
3.Current rating : 1 Amps max.
4.Contact resistance: 40m ohms max.
5.Insulation resistance: 1000M ohms min. 500 VDC
6.Dielectric withstanding voltage: 500 VAC / 1minute
7.Opterating Temperature: -20°C to +60°C
8.Storage Temperature: -40°C to +70°C
9.Material see table.
10. Total Mating Force : 28.8N (MAX) at 25 mm/minute
11.Total Unmating Force: 4.9N (MAX) at 25 mm/minute
12.Single Pin Retetion Force: 9.8N(MIN) at 25 mm/minute

THE PART NUMBER:
101-00178-**

29:功能區鍍金1u",錫腳鍍亮錫鉛至少160u"
30:功能區鍍金3u",錫腳鍍亮錫鉛至少160u"
31:功能區鍍金5u",錫腳鍍亮錫鉛至少160u"
32:功能區鍍金10u",錫腳鍍亮錫鉛至少160u"
33:功能區鍍金15u",錫腳鍍亮錫鉛至少160u"
34:功能區鍍金30u",錫腳鍍亮錫鉛至少160u"
64:功能區鍍金1u",錫腳鍍亮純錫至少160u"
65:功能區鍍金3u",錫腳鍍亮純錫至少160u"
66:功能區鍍金5u",錫腳鍍亮純錫至少160u"
67:功能區鍍金10u",錫腳鍍亮純錫至少160u"
68:功能區鍍金15u",錫腳鍍亮純錫至少160u"
69:功能區鍍金30u",錫腳鍍亮純錫至少160u"

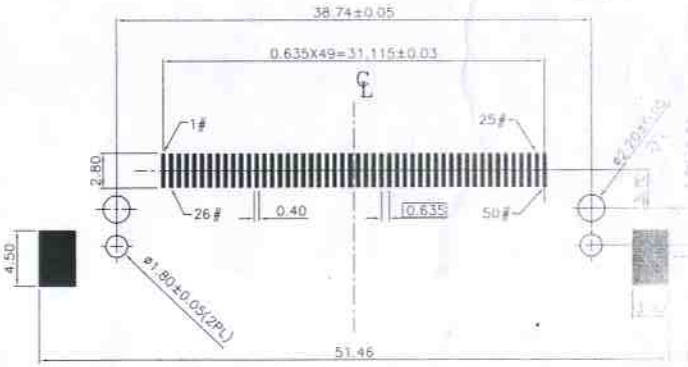

Pin Type	interface Dim L	Pin No.
detect	3.50MM	25, 26
General	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

GENERAL TOLERANCE		FILE.NO.	101-00178	PART.NO.	101-00178-**	DRAWN	LQP	MATERIAL		SCALE	NO SCALE
X.±0.50	x.°± 5°	REV.	A	TITLE	CF Conn.-32(13.75,拱形・板上・Post38.74有接地片・本色)	CHECKED		DATE	04/13/2006	UNIT	mm
.X±0.38	.x°± 2°	SIZE		SHEET	1 OF 1	APPROVED		SM	Shouh Min Industry (ShenZhen)CO.,LTD		
.XX±0.25	.xx± 1°	A4									