

# NB6N14S

## 3.3 V 1:4 AnyLevel™ Differential Input to LVDS Fanout Buffer/Translator

The NB6N14S is a differential 1:4 Clock or Data Receiver and will accept AnyLevel™ differential input signals: LVPECL, CML or LVDS. These signals will be translated to LVDS and four identical copies of Clock or Data will be distributed, operating up to 2.0 GHz or 2.5 Gb/s, respectively. As such, the NB6N14S is ideal for SONET, GigE, Fiber Channel, Backplane and other Clock or Data distribution applications.


The NB6N14S has a wide input common mode range from  $GND + 50\text{ mV}$  to  $V_{CC} - 50\text{ mV}$ . Combined with the  $50\ \Omega$  internal termination resistors at the inputs, the NB6N14S is ideal for translating a variety of differential or single-ended Clock or Data signals to 350 mV typical LVDS output levels.

The NB6N14S is offered in a small 3 mm x 3 mm 16-QFN package. Application notes, models, and support documentation are available at [www.onsemi.com](http://www.onsemi.com).

The NB6N14S is a member of the ECLinPS MAX™ family of high performance products.

### Features

- Maximum Input Clock Frequency > 2.0 GHz
- Maximum Input Data Rate > 2.5 Gb/s
- 1 ps Maximum RMS Clock Jitter
- Typically 10 ps Data Dependent Jitter
- 380 ps Typical Propagation Delay
- 120 ps Typical Rise and Fall Times
- $V_{REF\_AC}$  Reference Output
- TIA/EIA – 644 Compliant
- Functionally Compatible with Existing 3.3 V LVEL, LVEP, EP, and SG Devices
- These are Pb-Free Devices

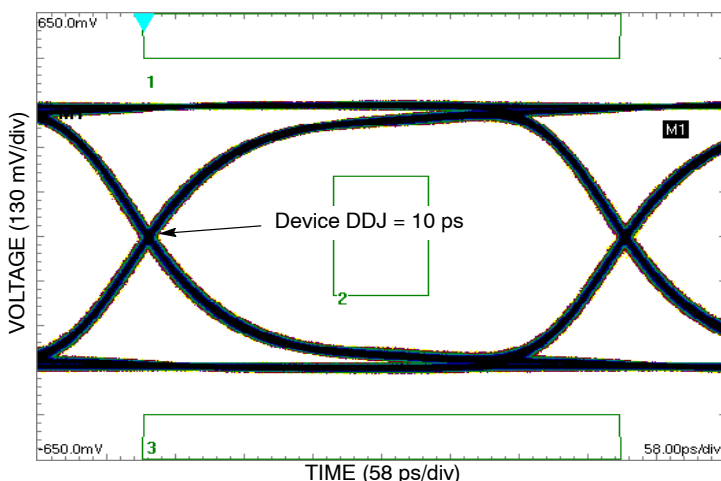

**Figure 2. Typical Output Waveform at 2.488 Gb/s with PRBS  $2^{23}-1$  ( $V_{INPP} = 400\text{ mV}$ ; Input Signal DDJ = 14 ps)**




**ON Semiconductor®**

<http://onsemi.com>

### MARKING DIAGRAM\*




**QFN-16  
MN SUFFIX  
CASE 485G**



A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*For additional marking information, refer to Application Note AND8002/D.

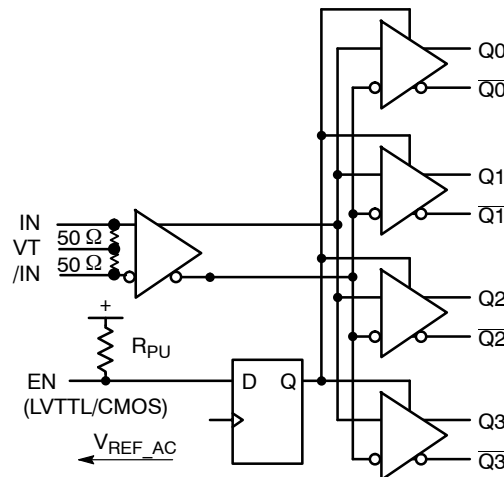

**Figure 1. Logic Diagram**

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 10 of this data sheet.

# NB6N14S

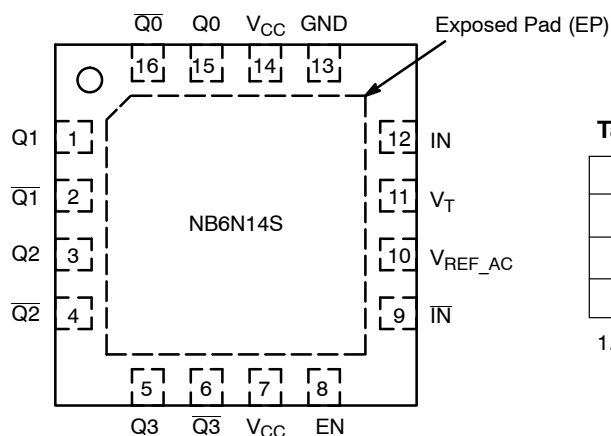


Figure 3. NB6N14S Pinout, 16-pin QFN (Top View)

Table 1. TRUTH TABLE

| IN | IN | EN | Q          | Q          |
|----|----|----|------------|------------|
| 0  | 1  | 1  | 0          | 1          |
| 1  | 0  | 1  | 1          | 0          |
| x  | x  | 0  | 0 (Note 1) | 1 (Note 1) |

1. On next transition of the input signal (IN).

Table 2. PIN DESCRIPTION

| Pin | Name                | I/O                   | Description                                                                                                                                                                                                                                                                                                                        |
|-----|---------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Q1                  | LVDS Output           | Non-inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                 |
| 2   | Q1                  | LVDS Output           | Inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                     |
| 3   | Q2                  | LVDS Output           | Non-inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                 |
| 4   | Q2                  | LVDS Output           | Inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                     |
| 5   | Q3                  | LVDS Output           | Non-inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                 |
| 6   | Q3                  | LVDS Output           | Inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                     |
| 7   | V <sub>CC</sub>     | –                     | Positive Supply Voltage.                                                                                                                                                                                                                                                                                                           |
| 8   | EN                  | LVTTTL / LVCMOS Input | Synchronous Output Enable. When LOW, Q outputs will go LOW and Qb outputs will go HIGH on the next negative transition of IN input. The internal DFF register is clocked on the falling edge of IN input; see Figure 23. The EN pin has an internal pullup resistor and defaults HIGH when left open.                              |
| 9   | IN                  | LVPECL, CML, LVDS     | Inverted Differential Input                                                                                                                                                                                                                                                                                                        |
| 10  | V <sub>REF_AC</sub> | LVPECL Output         | The V <sub>REF_AC</sub> reference output can be used to rebias capacitor-coupled differential or single-ended input signals. For the capacitor-coupled IN and/or INb inputs, V <sub>REF_AC</sub> should be connected to the VT pin and bypassed to ground with a 0.01 $\mu$ F capacitor.                                           |
| 11  | V <sub>T</sub>      | LVPECL Output         | Internal 100 $\Omega$ Center-tapped Termination Pin for IN and IN                                                                                                                                                                                                                                                                  |
| 12  | IN                  | LVPECL, CML, LVDS     | Non-inverted Differential Input. (Note 2)                                                                                                                                                                                                                                                                                          |
| 13  | GND                 | –                     | Negative Supply Voltage.                                                                                                                                                                                                                                                                                                           |
| 14  | V <sub>CC</sub>     | –                     | Positive Supply Voltage.                                                                                                                                                                                                                                                                                                           |
| 15  | Q0                  | LVDS Output           | Non-inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                 |
| 16  | Q0                  | LVDS Output           | Inverted IN output. Typically loaded with 100 $\Omega$ receiver termination resistor across differential pair.                                                                                                                                                                                                                     |
| –   | EP                  | –                     | The Exposed Pad (EP) on the QFN-16 package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat-sinking conduit. The pad is not electrically connected to the die, but is recommended to be electrically and thermally connected to GND on the PC board. |

2. In the differential configuration, when the input termination pin (VT) is connected to a termination voltage or left open, and if no signal is applied on IN/IN inputs, then the device will be susceptible to self-oscillation.

# NB6N14S

**Table 3. ATTRIBUTES**

| Characteristics                                        | Value                                                  |
|--------------------------------------------------------|--------------------------------------------------------|
| Moisture Sensitivity (Note 3)                          | Level 1                                                |
| Flammability Rating                                    | Oxygen Index: 28 to 34<br>UL 94 V-0 @ 0.125 in         |
| ESD Protection                                         | Human Body Model<br>Machine Model<br>> 2 kV<br>> 200 V |
| EN Input Pullup Resistor – R <sub>PU</sub>             | 37 kΩ                                                  |
| Transistor Count                                       | 225                                                    |
| Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test |                                                        |

3. For additional information, see Application Note AND8003/D.

**Table 4. MAXIMUM RATINGS**

| Symbol              | Parameter                                                                                                                        | Condition 1                             | Condition 2                       | Rating       | Unit         |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------------|--------------|--------------|
| V <sub>CC</sub>     | Positive Power Supply                                                                                                            | GND = 0 V                               |                                   | 3.8          | V            |
| V <sub>IN</sub>     | Positive Input                                                                                                                   | GND = 0 V                               | V <sub>IN</sub> ≤ V <sub>CC</sub> | 3.8          | V            |
| I <sub>IN</sub>     | Input Current Through R <sub>T</sub> (50 Ω Resistor)                                                                             | Static<br>Surge                         |                                   | 35<br>70     | mA<br>mA     |
| I <sub>OSC</sub>    | Output Short Circuit Current<br>Line-to-Line (Q to $\bar{Q}$ )<br>Line-to-End (Q or $\bar{Q}$ to GND)<br>TIA/EIA – 644 Compliant | Q or $\bar{Q}$<br>Q to $\bar{Q}$ to GND | Continuous<br>Continuous          | 12<br>24     | mA           |
| I <sub>REF_AC</sub> | V <sub>REF_AC</sub> Sink/Source Current                                                                                          |                                         |                                   | ±0.5         | mA           |
| T <sub>A</sub>      | Operating Temperature Range                                                                                                      | QFN-16                                  |                                   | –40 to +85   | °C           |
| T <sub>stg</sub>    | Storage Temperature Range                                                                                                        |                                         |                                   | –65 to +150  | °C           |
| θ <sub>JA</sub>     | Thermal Resistance (Junction-to-Ambient) (Note 4)                                                                                | 0 lfpm<br>500 lfpm                      | QFN-16<br>QFN-16                  | 41.6<br>35.2 | °C/W<br>°C/W |
| θ <sub>JC</sub>     | Thermal Resistance (Junction-to-Case)                                                                                            | 1S2P (Note 4)                           | QFN-16                            | 4.0          | °C/W         |
| T <sub>sol</sub>    | Wave Solder<br>Pb-Free                                                                                                           |                                         |                                   | 265          | °C           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

4. JEDEC standard multilayer board – 1S2P (1 signal, 2 power) with 8 filled thermal vias under exposed pad.

# NB6N14S

**Table 5. DC CHARACTERISTICS**  $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$

| Symbol   | Characteristic                | Min | Typ | Max | Unit |
|----------|-------------------------------|-----|-----|-----|------|
| $I_{CC}$ | Power Supply Current (Note 9) |     | 65  | 100 | mA   |

## DIFFERENTIAL INPUTS DRIVEN SINGLE-ENDED (Figures 14, 15, 19, and 21)

|               |                                                  |                  |                  |                  |    |
|---------------|--------------------------------------------------|------------------|------------------|------------------|----|
| $V_{th}$      | Input Threshold Reference Voltage Range (Note 8) | $GND + 100$      |                  | $V_{CC} - 100$   | mV |
| $V_{IH}$      | Single-ended Input HIGH Voltage                  | $V_{th} + 100$   |                  | $V_{CC}$         | mV |
| $V_{IL}$      | Single-ended Input LOW Voltage                   | $GND$            |                  | $V_{th} - 100$   | mV |
| $V_{REF\_AC}$ | Reference Output Voltage (Note 11)               | $V_{CC} - 1.600$ | $V_{CC} - 1.425$ | $V_{CC} - 1.300$ | V  |

## DIFFERENTIAL INPUTS DRIVEN DIFFERENTIALLY (Figures 10, 11, 12, 13, 20, and 22)

|           |                                                      |            |    |                |          |
|-----------|------------------------------------------------------|------------|----|----------------|----------|
| $V_{IHD}$ | Differential Input HIGH Voltage                      | 100        |    | $V_{CC}$       | mV       |
| $V_{ILD}$ | Differential Input LOW Voltage                       | $GND$      |    | $V_{CC} - 100$ | mV       |
| $V_{CMR}$ | Input Common Mode Range (Differential Configuration) | $GND + 50$ |    | $V_{CC} - 50$  | mV       |
| $V_{ID}$  | Differential Input Voltage ( $V_{IHD} - V_{ILD}$ )   | 100        |    | $V_{CC}$       | mV       |
| $R_{TIN}$ | Internal Input Termination Resistor                  | 40         | 50 | 60             | $\Omega$ |

## LVDS OUTPUTS (Note 5)

|                 |                                                                           |      |      |      |    |
|-----------------|---------------------------------------------------------------------------|------|------|------|----|
| $V_{OD}$        | Differential Output Voltage                                               | 250  |      | 450  | mV |
| $\Delta V_{OD}$ | Change in Magnitude of $V_{OD}$ for Complementary Output States (Note 10) | 0    | 1    | 25   | mV |
| $V_{OS}$        | Offset Voltage (Figure 18)                                                | 1125 |      | 1375 | mV |
| $\Delta V_{OS}$ | Change in Magnitude of $V_{OS}$ for Complementary Output States (Note 10) | 0    | 1    | 25   | mV |
| $V_{OH}$        | Output HIGH Voltage (Note 6)                                              |      | 1425 | 1600 | mV |
| $V_{OL}$        | Output LOW Voltage (Note 7)                                               | 900  | 1075 |      | mV |

## LVTTL/LVCMOS INPUTS

|          |                                |       |  |          |               |
|----------|--------------------------------|-------|--|----------|---------------|
| $V_{IH}$ | Input HIGH Voltage (Note 7, 8) | 2.0   |  | $V_{CC}$ | V             |
| $V_{IL}$ | Input LOW Voltage (Note 7, 8)  | $GND$ |  | 0.8      | V             |
| $I_{IH}$ | Input HIGH Current             | -150  |  | 150      | $\mu\text{A}$ |
| $I_{IL}$ | Input LOW Current              | -150  |  | 150      | $\mu\text{A}$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

5. LVDS outputs require 100  $\Omega$  receiver termination resistor between differential pair. See Figure 17.

6.  $V_{OHmax} = V_{OSmax} + \frac{1}{2} V_{ODmax}$ .

7.  $V_{OLmax} = V_{OSmin} - \frac{1}{2} V_{ODmax}$ .

8.  $V_{th}$  is applied to the complementary input when operating in single-ended mode.

9. Input termination pins open, D/D at the DC level within  $V_{CMR}$  and output pins loaded with  $R_L = 100\ \Omega$  across differential.

10. Parameter guaranteed by design verification not tested in production.

11.  $V_{REF\_AC}$  used to rebias capacitor-coupled inputs only (see Figures 14 and 15).

# NB6N14S

**Table 6. AC CHARACTERISTICS**  $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$ ,  $GND = 0 \text{ V}$ ; (Note 12)

| Symbol                   | Characteristic                                                                                                                                                                                                                 | -40°C             |                                |                              | 25°C              |                                |                              | 85°C              |                                |                              | Unit |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------------------------|------------------------------|-------------------|--------------------------------|------------------------------|-------------------|--------------------------------|------------------------------|------|
|                          |                                                                                                                                                                                                                                | Min               | Typ                            | Max                          | Min               | Typ                            | Max                          | Min               | Typ                            | Max                          |      |
| $f_{inMax}$              | Maximum Input Clock Frequency                                                                                                                                                                                                  | 2.0               |                                |                              | 2.0               |                                |                              | 2.0               |                                |                              | GHz  |
| $V_{OUTPP}$              | Output Voltage Amplitude (@ $V_{INPPmin}$ ) $f_{in} \leq 1.0 \text{ GHz}$<br>(Figure 4) $f_{in} = 1.5 \text{ GHz}$<br>$f_{in} = 2.0 \text{ GHz}$                                                                               | 220<br>200<br>170 | 350<br>300<br>270              |                              | 220<br>200<br>170 | 350<br>300<br>270              |                              | 220<br>200<br>170 | 350<br>300<br>270              |                              | mV   |
| $f_{DATA}$               | Maximum Operating Data Rate                                                                                                                                                                                                    | 1.5               | 2.5                            |                              | 1.5               | 2.5                            |                              | 1.5               | 2.5                            |                              | Gb/s |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Differential Input to Differential Output Propagation Delay                                                                                                                                                                    | 300               | 450                            | 600                          | 300               | 450                            | 600                          | 300               | 450                            | 600                          | ps   |
| $t_s$<br>$t_h$           | Setup Time<br>Hold Time                                                                                                                                                                                                        | 300<br>500        | 60<br>70                       |                              | 300<br>500        | 60<br>70                       |                              | 300<br>500        | 60<br>70                       |                              |      |
| $t_{SKEW}$               | Within Device Skew (Note 17)<br>Device-to-Device Skew (Note 16)                                                                                                                                                                |                   | 5<br>30                        | 20<br>200                    |                   | 5<br>30                        | 20<br>200                    |                   | 5<br>30                        | 20<br>200                    | ps   |
| $t_{JITTER}$             | RMS Random Clock Jitter (Note 14) $f_{in} = 1.0 \text{ GHz}$<br>$f_{in} = 1.5 \text{ GHz}$<br>Deterministic Jitter (Note 15) $f_{DATA} = 622 \text{ Mb/s}$<br>$f_{DATA} = 1.5 \text{ Gb/s}$<br>$f_{DATA} = 2.488 \text{ Gb/s}$ |                   | 0.5<br>0.5<br>6.0<br>7.0<br>10 | 1.0<br>1.0<br>20<br>20<br>20 |                   | 0.5<br>0.5<br>6.0<br>7.0<br>10 | 1.0<br>1.0<br>20<br>20<br>20 |                   | 0.5<br>0.5<br>6.0<br>7.0<br>10 | 1.0<br>1.0<br>20<br>20<br>20 | ps   |
| $V_{INPP}$               | Input Voltage Swing/Sensitivity<br>(Differential Configuration) (Note 13)                                                                                                                                                      | 100               |                                | $V_{CC}-GND$                 | 100               |                                | $V_{CC}-GND$                 | 100               |                                | $V_{CC}-GND$                 | mV   |
| $t_r$<br>$t_f$           | Output Rise/Fall Times @ 250 MHz<br>(20% – 80%) $Q, \bar{Q}$                                                                                                                                                                   | 60                | 120                            | 190                          | 60                | 120                            | 190                          | 60                | 120                            | 190                          | ps   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

12. Measured by forcing  $V_{INPPmin}$  with 50% duty cycle clock source and  $V_{CC} - 1400 \text{ mV}$  offset. All loading with an external  $R_L = 100 \Omega$ . Input edge rates 150 ps (20%–80%). See Figure 17.


13. Input voltage swing is a single-ended measurement operating in differential mode.

14. RMS jitter with 50% Duty Cycle clock signal at 750 MHz.

15. Deterministic jitter with input NRZ data at PRBS 2<sup>23</sup>-1 and K28.5.

16. Skew is measured between outputs under identical transition @ 250 MHz.

17. The worst case condition between  $Q0/Q\bar{0}$  and  $Q1/Q\bar{1}$  from either  $D0/D\bar{0}$  or  $D1/D\bar{1}$ , when both outputs have the same transition.

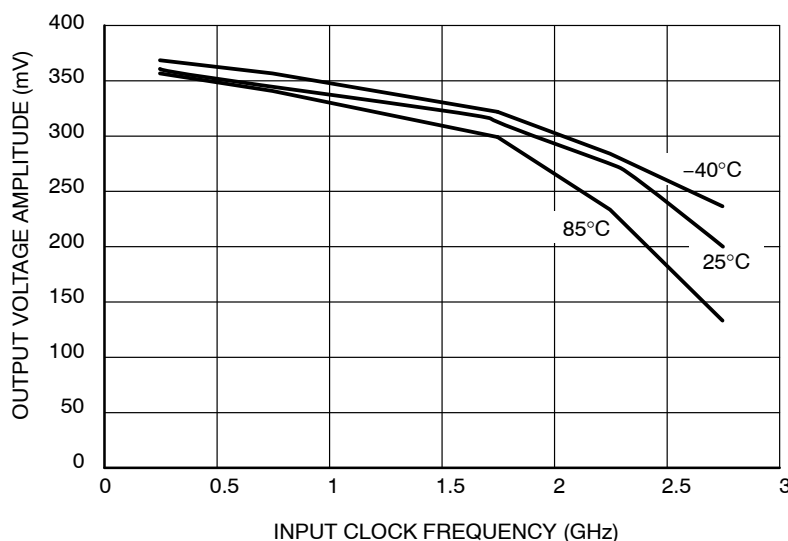

**Figure 4. Output Voltage Amplitude ( $V_{OUTPP}$ ) versus Input Clock Frequency ( $f_{in}$ ) and Temperature (@  $V_{CC} = 3.3 \text{ V}$ )**

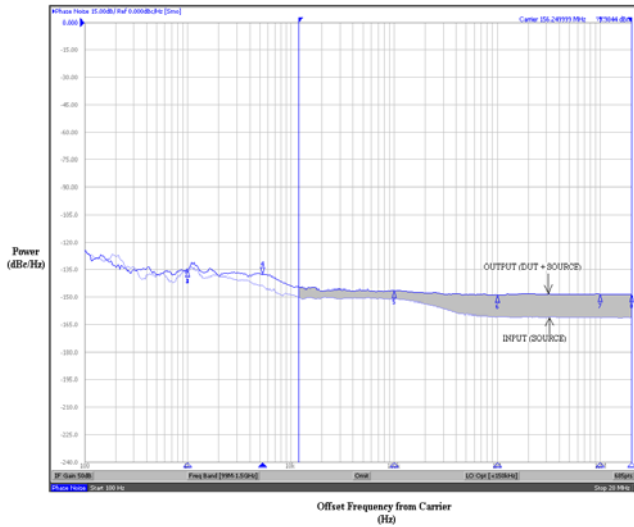


Figure 5. Typical Phase Noise Plot at  $f_{\text{carrier}} = 156.25 \text{ MHz}$

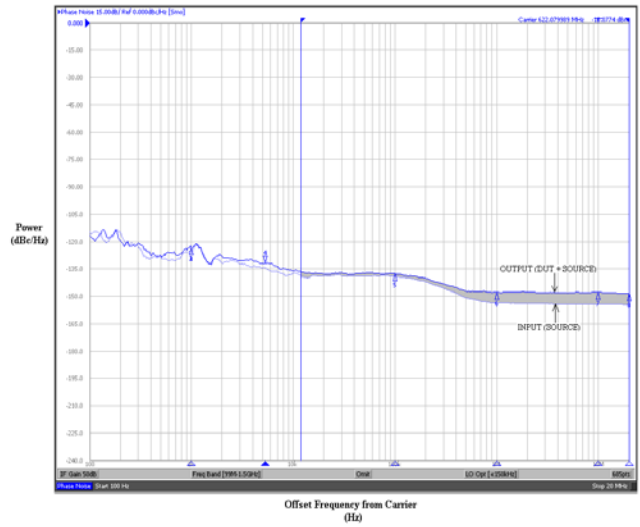


Figure 6. Typical Phase Noise Plot at  $f_{\text{carrier}} = 622.08 \text{ MHz}$

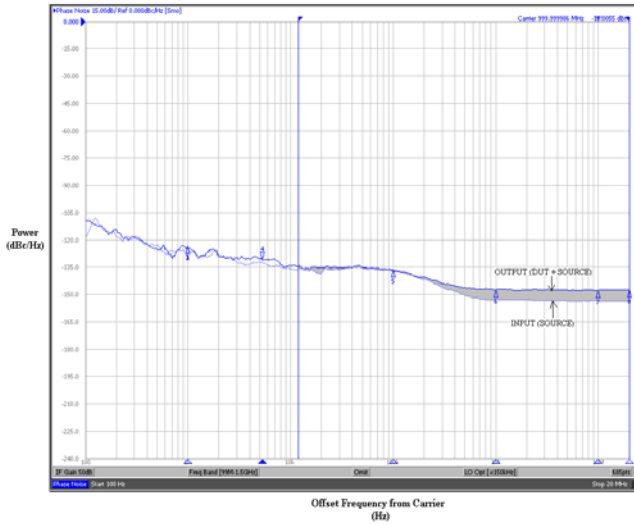


Figure 7. Typical Phase Noise Plot at  $f_{\text{carrier}} = 1 \text{ GHz}$


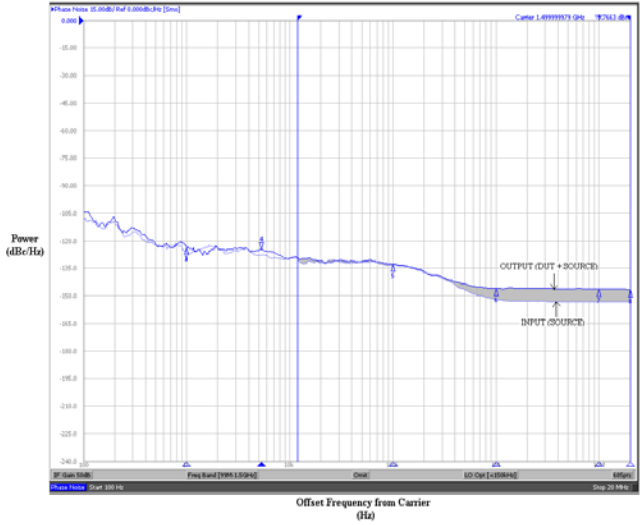


Figure 8. Typical Phase Noise Plot at  $f_{\text{carrier}} = 1.5 \text{ GHz}$


The above phase noise plots captured using Agilent E5052A show additive phase noise of the NB6N14S device at frequencies 156.25 MHz, 622.08 MHz, 1 GHz and 1.5 GHz respectively at an operating voltage of 3.3 V in room temperature. The RMS Phase Jitter contributed by the

device (integrated between 12 kHz and 20 MHz; as shown in the shaded region of the plot) at each of the frequencies is 182 fs, 31 fs, 20 fs and 15 fs respectively. The input source used for the phase noise measurements is Agilent E8663B.


# NB6N14S

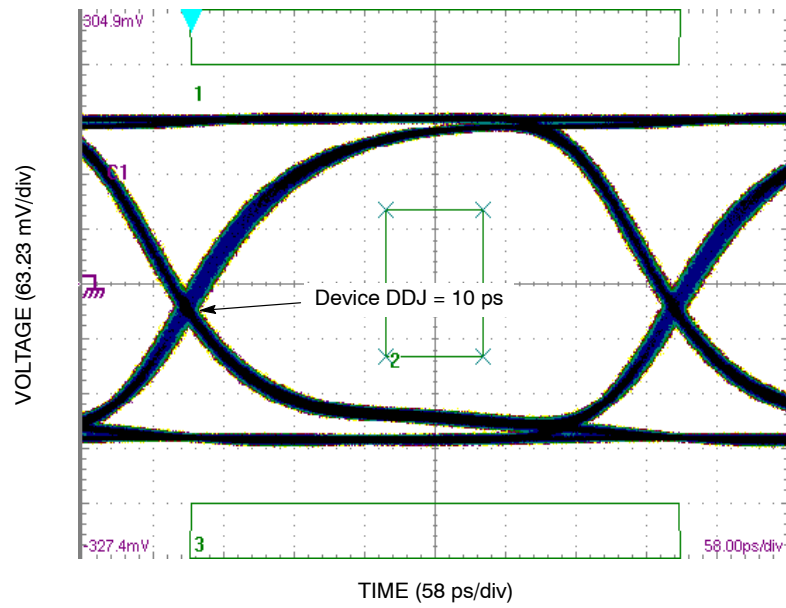


**Figure 9. Typical Output Waveform at 2.488 Gb/s with PRBS  $2^{23}-1$  and OC48 mask ( $V_{INPP} = 100$  mV; Input Signal DDJ = 14 ps)**

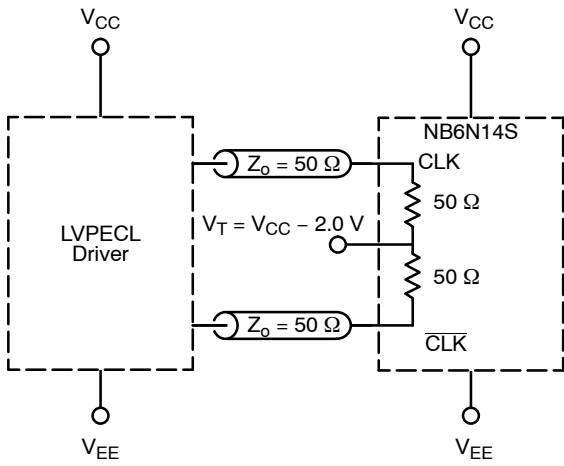**NB6N14S**


### Figure 10. LVPECL Interface

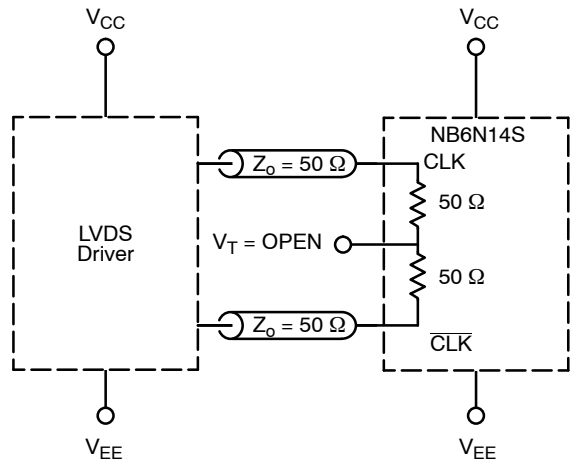


### Figure 11. LVDS Interface

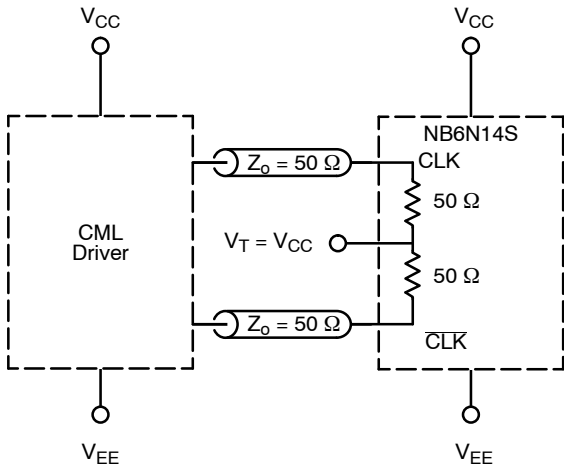


### Figure 12. Standard 50 $\Omega$ Load CML Interface

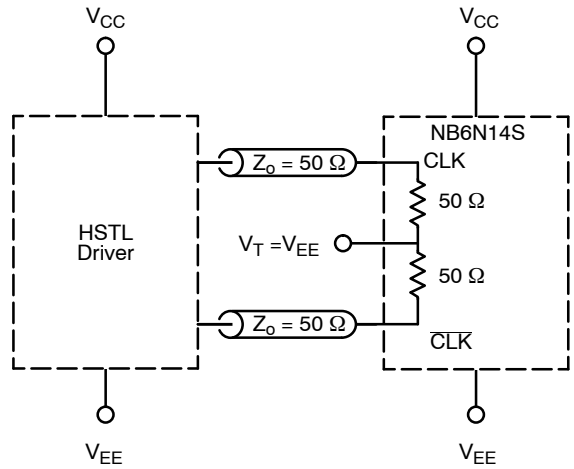

### Figure 13. Standard 50 $\Omega$ Load HSTL Interface

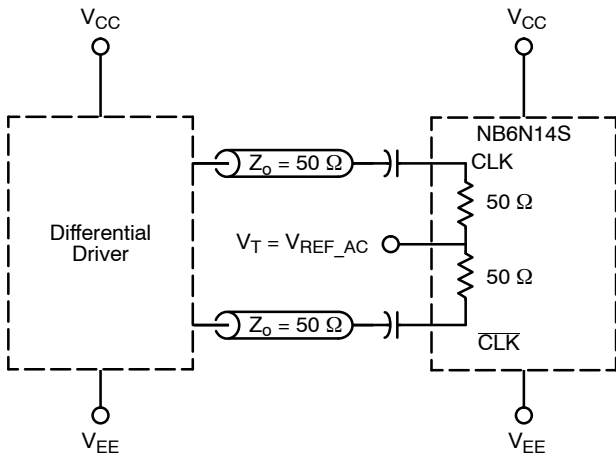

**Figure 14. Capacitor-Coupled Differential Interface ( $V_T$  Connected to  $V_{REF\_AC}$ )**

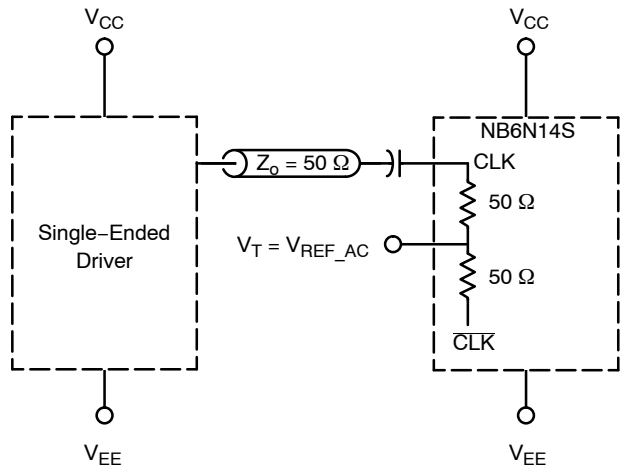

**Figure 15. Capacitor-Coupled Single-Ended Interface ( $V_T$  Connected to  $V_{REF\_AC}$ )**

# NB6N14S

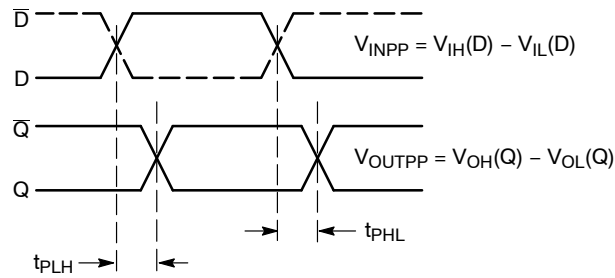


Figure 16. AC Reference Measurement

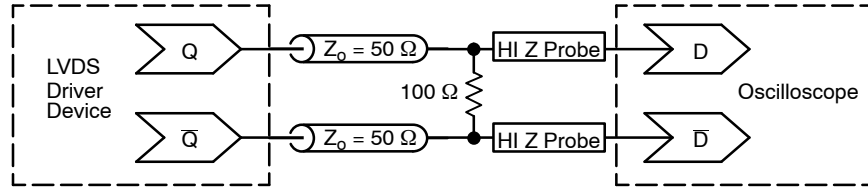


Figure 17. Typical LVDS Termination for Output Driver and Device Evaluation

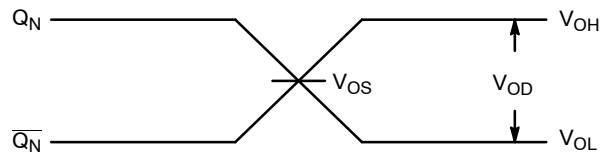


Figure 18. LVDS Output

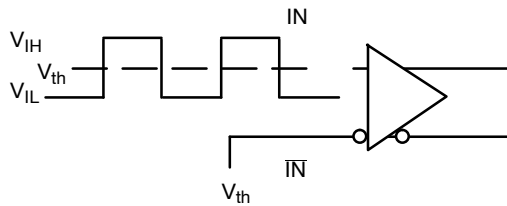


Figure 19. Differential Input Driven Single-Ended

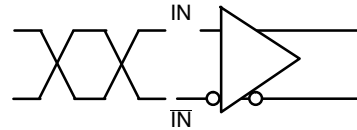


Figure 20. Differential Inputs Driven Differentially

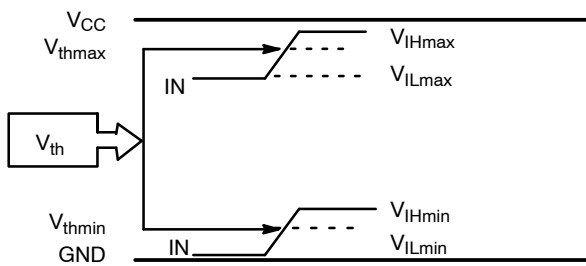


Figure 21.  $V_{th}$  Diagram

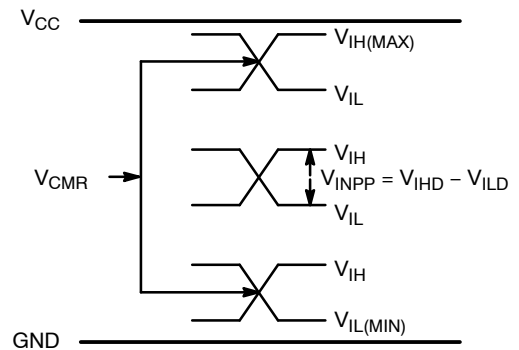


Figure 22.  $V_{CMR}$  Diagram

## NB6N14S

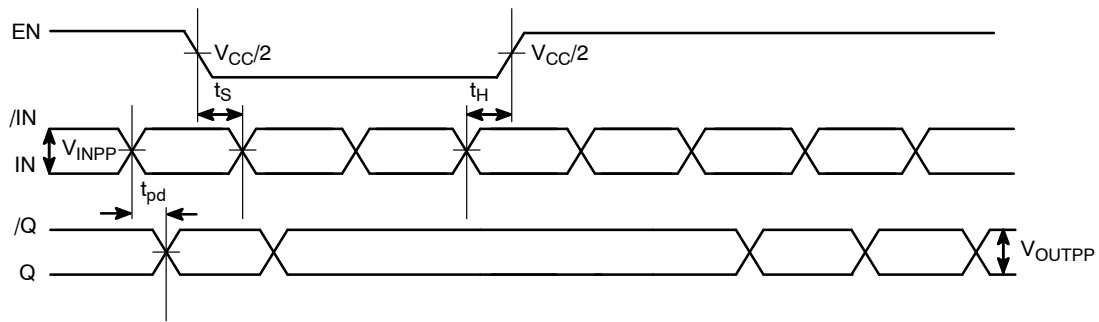


Figure 23. EN Timing Diagram

### ORDERING INFORMATION



| Device       | Package                       | Shipping <sup>†</sup> |
|--------------|-------------------------------|-----------------------|
| NB6N14SMNG   | QFN-16, 3 X 3 mm<br>(Pb-Free) | 123 Units / Rail      |
| NB6N14SMNR2G | QFN-16, 3 X 3 mm<br>(Pb-Free) | 3000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NB6N14S

## PACKAGE DIMENSIONS


QFN16 3x3, 0.5P  
CASE 485G  
ISSUE F

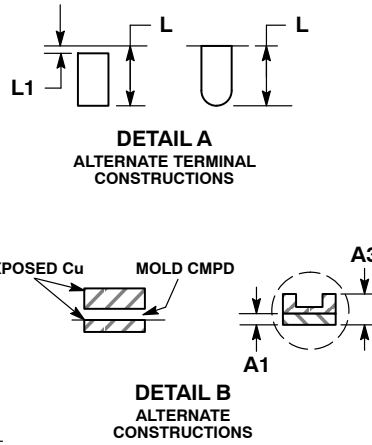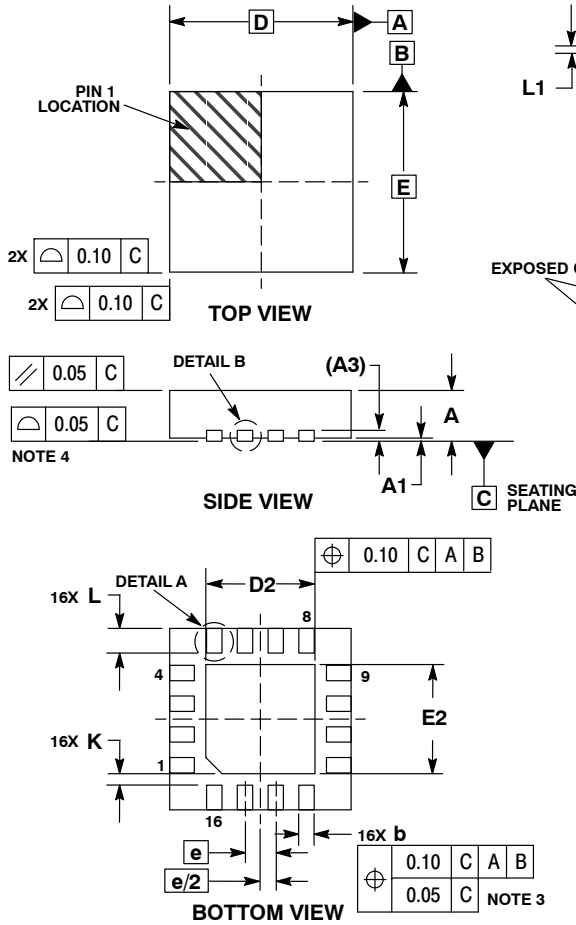

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
  4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN         | NOM  | MAX  |
| A   | 0.80        | 0.90 | 1.00 |
| A1  | 0.00        | 0.03 | 0.05 |
| A3  | 0.20 REF    |      |      |
| b   | 0.18        | 0.24 | 0.30 |
| D   | 3.00 BSC    |      |      |
| D2  | 1.65        | 1.75 | 1.85 |
| E   | 3.00 BSC    |      |      |
| E2  | 1.65        | 1.75 | 1.85 |
| e   | 0.50 BSC    |      |      |
| K   | 0.18 TYP    |      |      |
| L   | 0.30        | 0.40 | 0.50 |
| L1  | 0.00        | 0.08 | 0.15 |

### RECOMMENDED SOLDERING FOOTPRINT\*

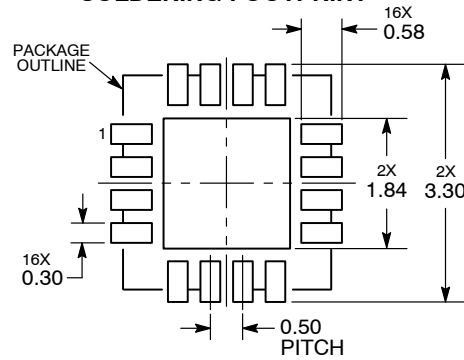

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

AnyLevel and ECLinPS MAX are trademarks of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative