




REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

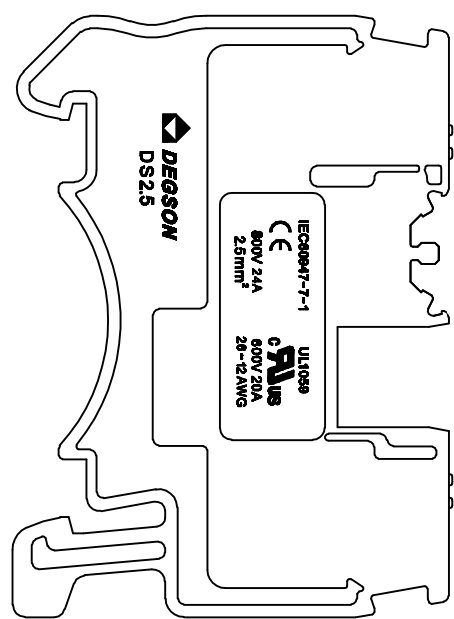

DS2.5 - 01P - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch)
 (RoHS)
 00A - (Standard)
 (Color): 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)

- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

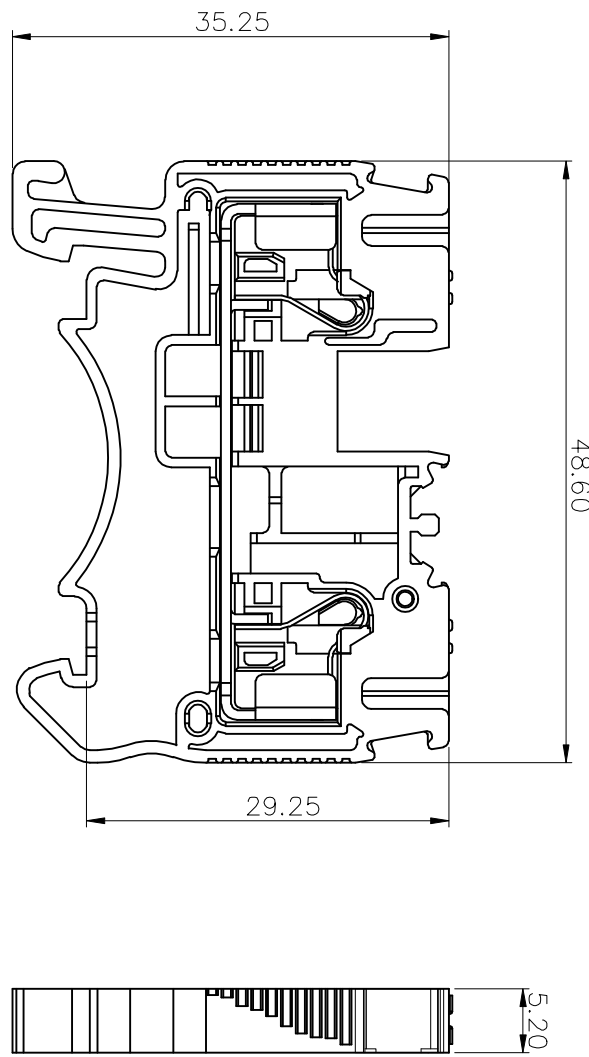

NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 20A
 2. Withstanding voltage : AC2200V/1Min.
 3. Wire range : 26~12AWG

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.20mm, Poles : 01P
 3. Stripping length : 10~12mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

IEC Standard

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800V
Rate current(A)	24A

Pitch	Range	In	Nominal	Dimension	Range		
mm	mm	mm	mm	mm	mm	-	
Over	Over	Over	Over	Over	Over	-	D
6	10	10	30	60	100	0.1/10	
TO	TO	TO	TO	TO	TO		
10	10	24	30	60	100		
6	10	24	30	60	100		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

2. Wire range : 0.2~2.5mm²(4mm² sol)

6. RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	CHKD:	/
DRT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1