# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 8, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin



The figure shows a 10-position version of the product

## Product Features

- The cable connection area for MSTBT 2,5/... is positioned lower than that of MSTB 2,5/...
- Plug-in direction parallel to the conductor axis

## Key commercial data

| | |
|---|---|
| Packing unit | 1 1 |
| Minimum order quantity | 50 1 |
| Weight per Piece (excluding packing) | 14.68 GRM |
| Custom tariff number | 85366990 |
| Country of origin | Germany |

## Technical data

### Dimensions

| | |
|---|---|
| Pitch | 5 mm |
| Dimension a | 35 mm |

### General

| | |
|---|---|
| Range of articles | MSTBT 2,5/..-STF |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/3) | 250 V |
| Rated voltage (III/2) | 320 V |

# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

## Technical data

### General

| | |
|---|---|
| Rated voltage (II/2) | 630 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current $I_N$ | 12 A |
| Nominal cross section | 2.5 mm² |
| Maximum load current | 12 A (with 2.5 mm² conductor cross section) |
| Insulating material | PA |
| Inflammability class according to UL 94 | V2 |
| Internal cylindrical gage | A3 |
| Stripping length | 7 mm |
| Number of positions | 8 |
| Screw thread | M3 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |

### Connection data

| | |
|---|---|
| Conductor cross section solid min. | 0.2 mm² |
| Conductor cross section solid max. | 2.5 mm² |
| Conductor cross section stranded min. | 0.2 mm² |
| Conductor cross section stranded max. | 2.5 mm² |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 2.5 mm² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.25 mm² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 1.5 mm² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| 2 conductors with same cross section, solid min. | 0.2 mm² |
| 2 conductors with same cross section, solid max. | 1 mm² |
| 2 conductors with same cross section, stranded min. | 0.2 mm² |
| 2 conductors with same cross section, stranded max. | 1.5 mm² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.25 mm² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 1 mm² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm² |
| Minimum AWG according to UL/CUL | 30 |

# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

## Technical data

### Connection data

| | |
|---|---|
| Maximum AWG according to UL/CUL | 12 |

## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

### ETIM

| | |
|---|---|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

### UNSPSC

| | |
|---|---|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

## Approvals

### Approvals

Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / GOST / IECEE CB Scheme / GOST / UL Recognized / cUL Recognized / CCA / cULus Recognized

Ex Approvals

Approvals submitted

# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

## Approvals

### Approval details

CSA

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 28-12 | 28-12 |
| Nominal current IN | 10 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |

VDE Gutachten mit Fertigungsüberwachung

| | |
|---|---|
| mm²/AWG/kcmil | 0.2-2.5 |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |

GOST

IECEE CB Scheme

| | |
|---|---|
| mm²/AWG/kcmil | 0.2-2.5 |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |

GOST

UL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 30-12 | 30-12 |

# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

## Approvals

| | B | D |
|---|---|---|
| Nominal current IN | 15 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |

cUL Recognized

| | B | D |
|---|---|---|
| mm²/AWG/kcmil | 30-12 | 30-12 |
| Nominal current IN | 15 A | 10 A |
| Nominal voltage UN | 300 V | 300 V |

CCA

| | |
|---|---|
| mm²/AWG/kcmil | 0.2-2.5 |
| Nominal current IN | 12 A |
| Nominal voltage UN | 250 V |

cULus Recognized

## Accessories

### Accessories

### Marking

Marker cards - SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, For terminal block width: 5.08 mm

### Plug/Adapter

# Printed-circuit board connector - MSTBT 2,5/ 8-STF - 1919776

## Accessories

Coding profile - CP-MSTB - 1734634



Coding profile, is inserted into the slot on the plug or inverted header, red insulating material

### Tools

Screwdriver - SZS 0,6X3,5 - 1205053



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip


Insertion bridge - EBP 2- 5 - 1733169



Insertion bridge, fully insulated, for connectors with 5.0 or 5.08 mm pitch, no. of positions: 2

## Drawings

Dimensioned drawing

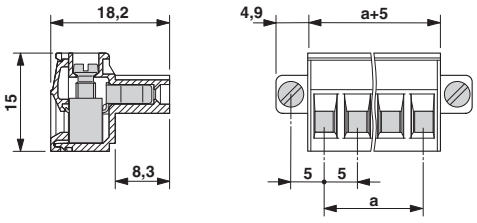


© Phoenix Contact 2013 - all rights reserved
http://www.phoenixcontact.com