

351MHz 7dBi Gain Omnidirectional Antenna

FG3517



FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The FG3517 omnidirectional base station antenna incorporates a coaxial design that is enclosed in high density fiberglass, which is covered with a protective ultraviolet inhibiting coating. The radiating elements are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a "cold" sleeve that allows for greater freedom in mounting. The antenna's high quality and well-focused beam provides the best efficiency with highest gain.

FEATURES

- High gain (7dBi)
- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance
- Custom UV protection coating
- Durable gold anodized sleeve and cap with N-female connector
- FedEx/UPS Shippable

MARKETS

- Omnidirectional outdoor antenna applications used in commercial, public safety, and government applications around the globe
- Typical applications include land based and marine radio and voice and data transmission
- Designed for use in the China public safety market

MECHANICAL SPECIFICATIONS

All data relevant to all frequencies

Maximum Power	100 Watts
Nominal Impedance	50 Ω
Polarization	Vertical
VSWR	$\leq 1.5:1$
Termination	N-Female Connector
Mounting Bracket	FM2 Mounting Kit included
Lightning Protection	Lightning Arrestor p/n: LABH350NN (sold separately)
Antenna Length	90" (2.27 m)
Weight (Mass)	2 lbs
Diameter	1.310" (33.27 mm)
Rated Wind Velocity	100mph (160 kph)
Rated Wind Velocity (with 1/2" (12.7 mm) radial ice)	85mph (137 kph)
Wind Resistance	0.8133 sq. ft

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com


Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

351MHz 7dBi Gain Omnidirectional Antenna FG3517

VSWR DIAGRAM


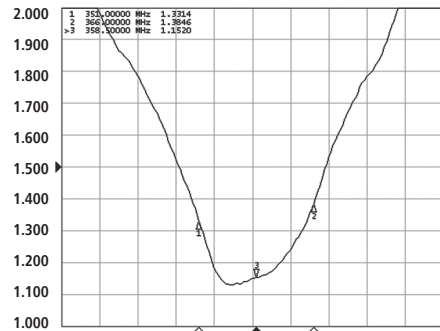


PATTERNS



Azimuth

Elevation



351 MHz



358.5 MHz



366 MHz



ANT-DS-FG3517 1110

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.