


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

PRODUCTION TESTS



TY-303P.DC2

DOT ABOVE
TERMINAL #1
ON BOBBIN

"TY-303P" TO READ
TOWARD 1,2, SIDE

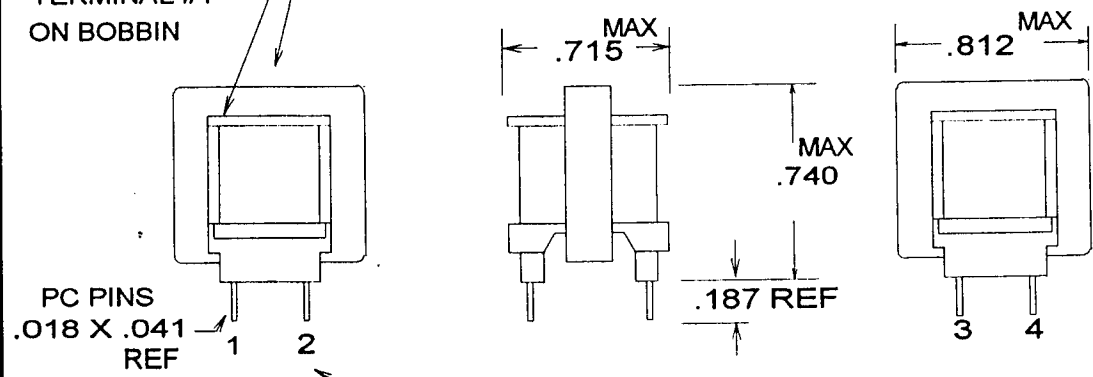

NUMBERS FOR REF
ONLY, NOT TO APPEAR
ON PART.

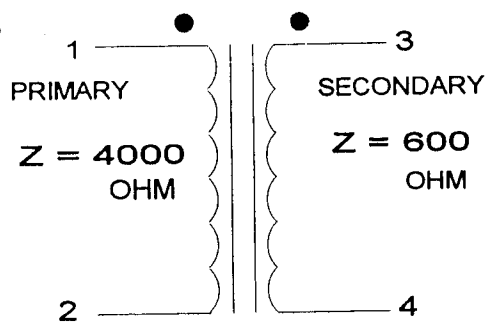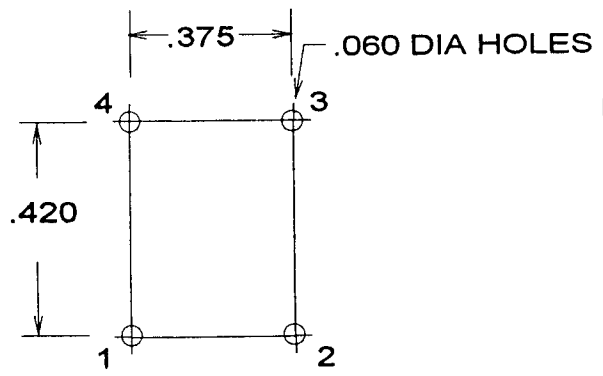

TURNS RATIO = 100%	
DC	1-2 = 260 NOM
RESISTANCE IN OHMS	3-4 = 52 NOM

APPLY = 1V, 200 HZ, PINS 1-2

INDUCTANCE = 12.5 HY, MINIMUM

HIPOT = 1500V PRI TO SEC, CORE
1500V SEC TO CORE

CONTINUITY = 100% IN FINAL.
IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO BE FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

MagneTek

PART NO. TY-303P

METHOD 1 X 1

MARKING ON TY-303P ON TOP OF CORE
DATE & SITE CODE ON SIDE OF CORE