


### Features

- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

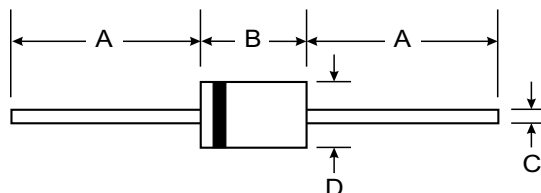

### Mechanical Data

- Case: JEDEC DO-41, molded plastic
- Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Weight: 0.012 ounces, 0.34 grams
- Mounting position: Any

DO-41		
Dim	Min	Max
A	25.40	—
B	4.06	5.21
C	0.71	0.864
D	2.00	2.72
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



		ERA32 - 01	ERA32 - 02	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	100	200	V
Maximum RMS voltage	$V_{RMS}$	70	140	V
Maximum DC blocking voltage	$V_{DC}$	100	200	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A = 75^\circ\text{C}$	$I_{F(AV)}$	1.0		A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J = 125^\circ\text{C}$	$I_{FSM}$	40.0		A
Maximum instantaneous forward voltage @ 1.0A	$V_F$	0.92		V
Maximum reverse current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	$I_R$	5.0 50.0		$\mu\text{A}$
Maximum reverse recovery time (Note1)	$t_{rr}$	50		ns
Typical junction capacitance (Note2)	$C_J$	20		pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	60		$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	- 55 ----- + 150		$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 ----- + 150		$^\circ\text{C}$

NOTE: 1. Measured with  $I_F = 0.5\text{A}$ ,  $I_R = 1\text{A}$ ,  $I_{rr} = 0.25\text{A}$ .


2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.


**FIG.1–TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

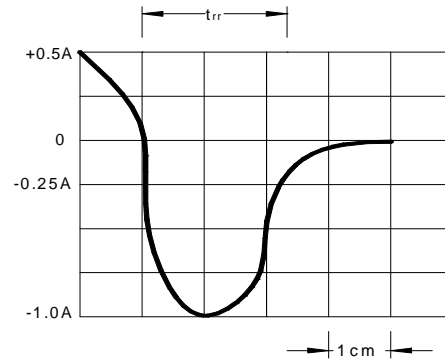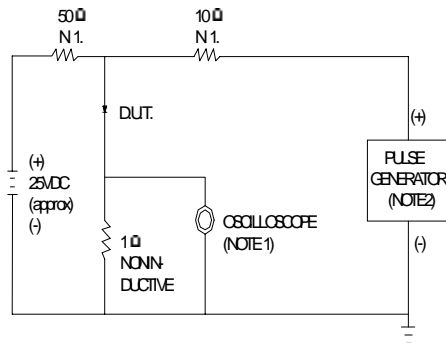


**FIG.3 –FORWARD DERATING CURVE**

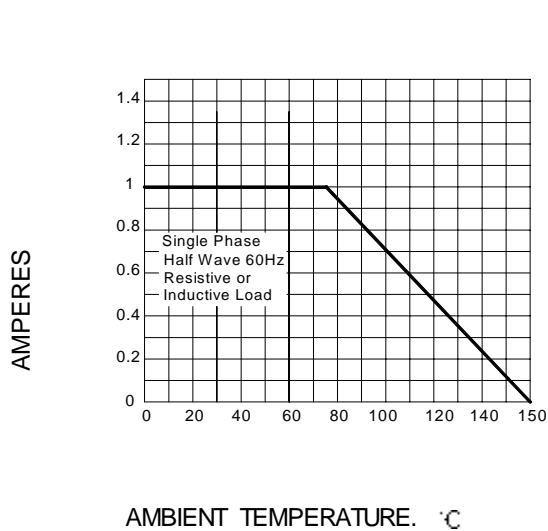

**FIG.4–TYPICAL JUNCTION CAPACITANCE**

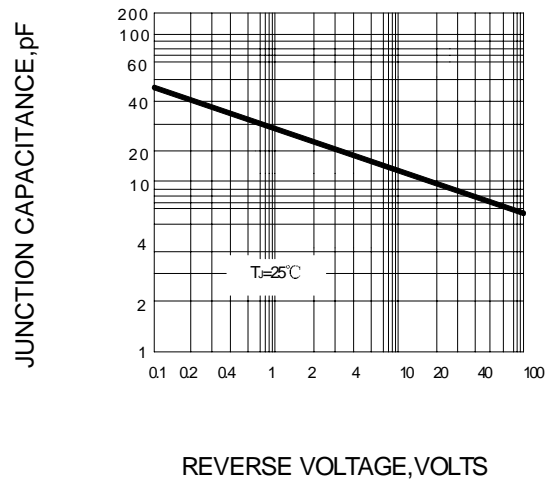

**FIG.5–PEAK FORWARD SURGE CURRENT**

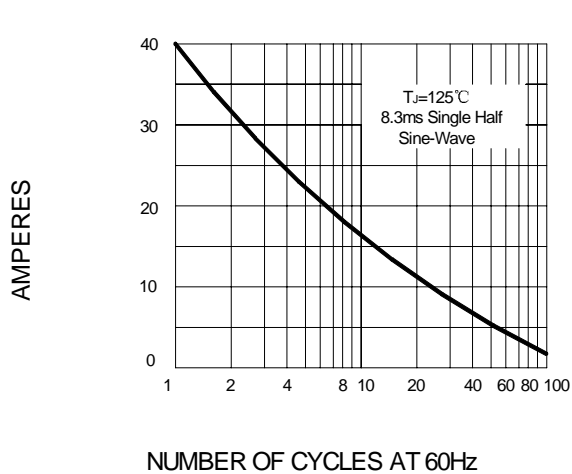

**FIG.1 – TYPICAL FORWARD CHARACTERISTIC**

