
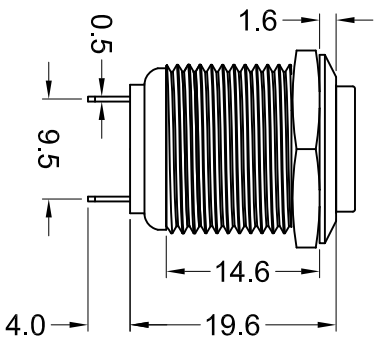

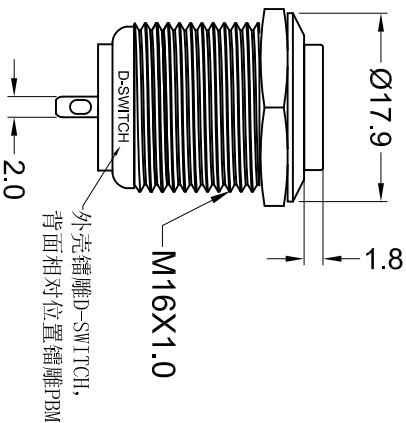
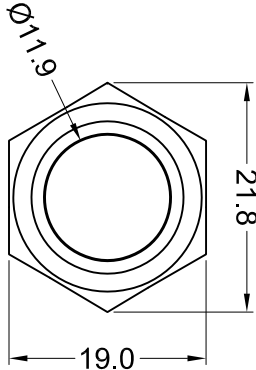


Nut Torque:5 ~ 14Nm
Operating Pressure:500gf ±200gf
Operating Stroke:1.9mm ±0.5mm
Protection Grade:IP65
Function:(ON)-OFF
Contact:Silver Alloy
Base:PB T
Shell:Brass,Ni Plating
Button:SUS
Terminal:Brass,silver
Rating(Resistive load): 3A 250V AC
Contact Resistance: 50mΩ Max
Insulation Resistance: 100MΩ Min
Dielectric Strength: 1500V AC 1 minute
Electrical life: 50,000 cycles
Mechanical life :200,000 cycles
Operating Temperature: -20°C~80°C
Relative Air Humidity:45%~85%
Safety Approval:

SWITCHING CIRCUIT



D-SWITCH ELECTRONICS CO.,LTD

公差 TOLERANCES .X±0.5 .XX±0.3 角度 ANGLE ±1° 单位 DIMENSION UNIT mm.

版本 VERSION A0 比例尺 SCALE 1:1 日期 DATE 2021.04.27 品名 TITLE 图号 DRAWING NO

核准 核对 绘图 孙成 PBM-16M11-HS-N-NN-B8S-A3 PBM-16M11-HS-N-NN-B8S-A3_A0

版本 VER 变更说明 CHANGE DESCRIPTION 日期 DATE ECN NO.