

# 10 x 38mm Ceramic, Fast Acting




## Features

- Photovoltaic / Solar Panel Power Fuses
- RoHS Compliant
- Available in Blister (B Suffix) Package



**F-10**

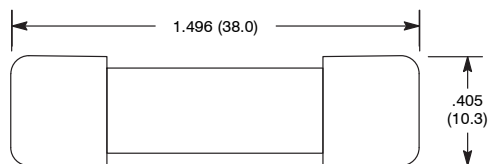

## Specifications

**Rated Voltage:** 1000V

**Breaking Capacity:** 1000VAC, 50A; 1000VDC, 30A

**Time Current Characteristics:**

% of Ampere Rating	Opening Time	
	1A - 5A	6A - 20A
100%	4 hours min.	4 hours min.
400%	0.003 - 1 seconds	0.01 - 10 seconds
1000%	0.02 seconds max.	0.03 seconds max.

**Ordering Information:**

NTE Type No. (Note 1)	Rated Current	Diag No.
74-10FC1A	1A	F-10
74-10FC2A	2A	F-10
74-10FC3A	3A	F-10
74-10FC4A	4A	F-10
74-10FC5A	5A	F-10
74-10FC6A	6A	F-10
74-10FC8A	8A	F-10
74-10FC10A	10A	F-10
74-10FC12A	12A	F-10
74-10FC15A	15A	F-10
74-10FC20A	20A	F-10

Note 1. For blister package, add a "B" suffix.