


O.P. (MM)	F.P. (MM)
14.8±0.8	16.0 MAX





O.P. = OPERATING POINT
F.P. = FREE-POSITION



▲ CIRCUIT: SPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- RATING: .1A @125VAC; 2A @ 12VDC;
0.5A @ 42VDC; 1A @ 24VDC;
UL, CUL APPROVED
- ▲ 4. OPERATING FORCE: 70 GRAMS MAX.
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: >100 MEGA-OHMS @ 500VDC
9. DIELECTRIC STRENGTH: 600VAC
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX (INITIAL).
- 2011/65/EC (ROHS) COMPLIANT.
- ▲ DENOTES CRITICAL PARAMETER.

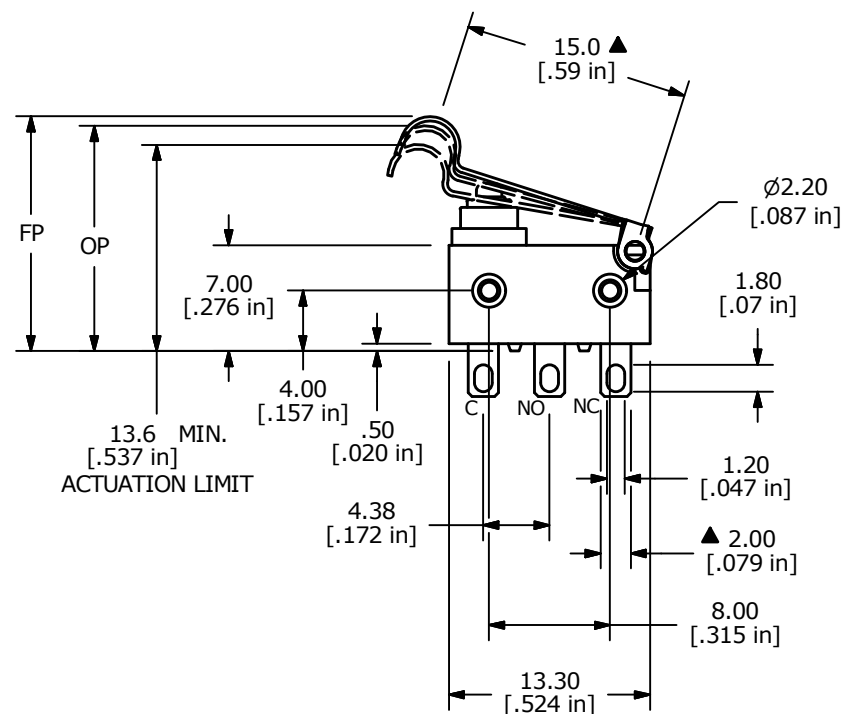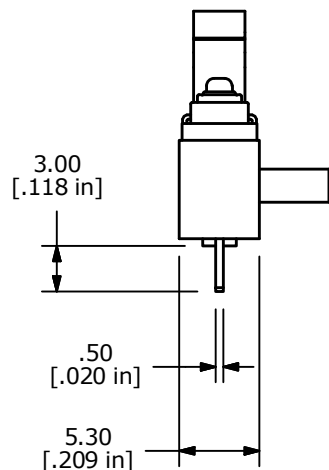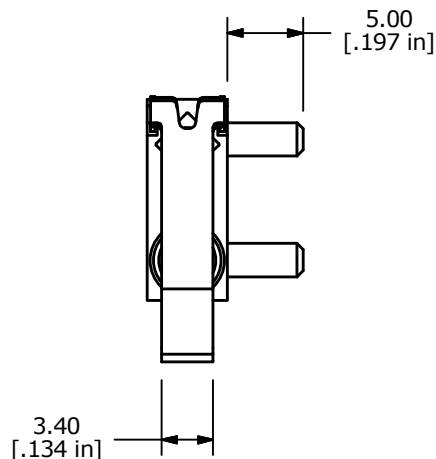

B	23345	update Terminal callout	5/3/18	MW
A	23213	New Release	2/12/18	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE WS0850102F070SA

SCALE 2:1	DATE 2/12/2018	DR rc	DWG Q930008	REV B
--------------	-------------------	----------	----------------	----------