



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	120 mm
IP degree of protection	IP23 conforming to IEC 60529
[Us] rated supply voltage	12 V AC/DC
Light source	High luminosity LED, red

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part AS: globe
CAD overall width	120 mm
CAD overall depth	120 mm
Net weight	0.5 kg
Marking	CE
Product mounting	By 3 M5 screws
Supply voltage limits	10...15 V DC 10.8...13.2 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	250 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm ²
AWG gauge	AWG 18
Cable length	400 mm

Environment

Standards	EN 61000-6-2 EN 61000-6-4
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140

Packing Units

Package 1 Weight	0.586 kg
Package 1 Height	1.950 dm
Package 1 width	1.380 dm
Package 1 Length	1.400 dm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Rotating Mirror Beacon

Dimensions

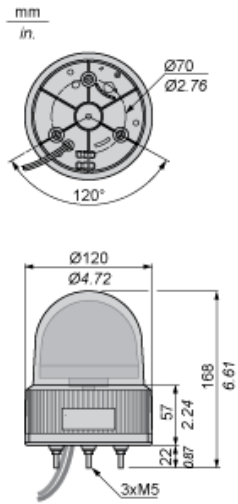

Rotating Mirror Beacon

Panel Cut-out

